



Cross recessed heavy square hook

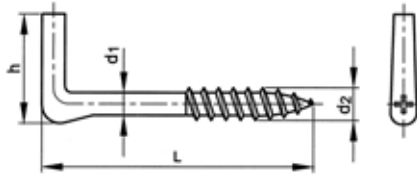


Technical data

d1	5,25	6
d2	5,5	6
h	16	18

17140 Cross recessed heavy square hook article 9G

F11B


Material Steel
Surface treatment Zinc plated
Packaging Standard



5

d1 x L	☒	Art.number	d1 x L	☒	Art.number	d1 x L	☒	Art.number
5,25X40MM	100	17140.052.040	6,00X65MM	100	17140.060.065			
5,25X50MM	100	17140.052.050	6,00X80MM	100	17140.060.080			

Square hook pin

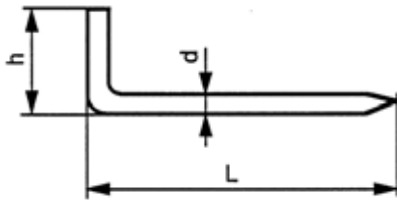

Technical data

d x L	h
2,40x20	10
2,40x25	11
3,20x30	14
3,45x40	16
4,00x50	18
4,00x60	20
5,00x80	23
5,00x100	24

17080 Square hook pin article 4



F11B

Material Steel
Surface treatment Zinc plated
Packaging Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
2,40X20MM	100	17080.000.020	3,20X30MM	100	17080.000.030	4,00X60MM	100	17080.000.060
2,40X25MM	100	17080.000.025	3,45X40MM	100	17080.000.040	5,00X80MM	100	17080.000.080
			4,00X50MM	100	17080.000.050			

Safety swing hook

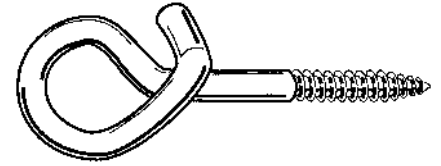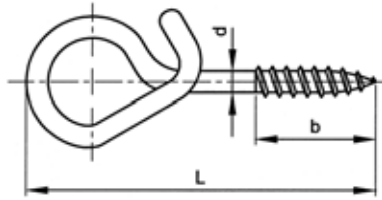


Technical data

d	b
8,8	50
10	45
12	55

Assembly data

5

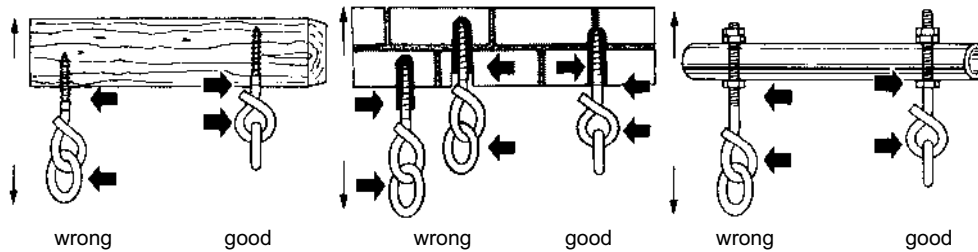

- safety swing hook must be turned in sufficiently so that the threaded shank is completely **invisible**
- safety swing hook must be **transversely** assembled to the swingdirection (this causes the ring to roll and not to slide, consequently reducing wear to minimum)
- safety swing hook and ring must be greased regularly!
- extensive assembly data in each packaging of these safety swing hooks

17443 Safety swing hook article 117G



F11B

Material Steel
Surface treatment Zinc plated
Packaging Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
10X125MM	10	17443.100.125	12X140MM	10	17443.120.140	12X160MM	10	17443.120.160
10X140MM	10	17443.100.140						
10X160MM	10	17443.100.160						

Safety swing hook metric

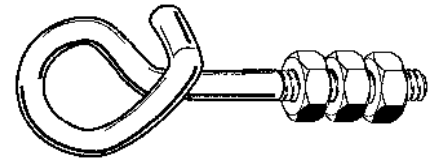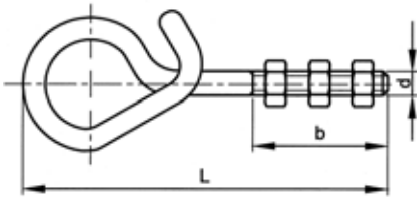


Technical data

d	M12
P	1,75

17445 Safety swing hook article 118G

F11B




Thread	Metric thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard

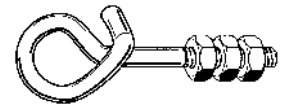

d x L/b	☒	Art.number	d x L/b	☒	Art.number	d x L/b	☒	Art.number
M12X140X60	10	17445.120.140	M12X180X80	10	17445.120.180	M12X250X160	10	17445.120.250
M12X160X80	10	17445.120.160						

5


Ring for safety swing hooks welded

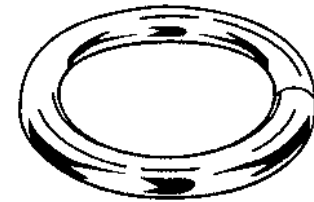

17447 Ring for safety swing hooks welded article 119G


F11B

Material	Steel
Surface treatment	Zinc plated
Packaging	Standard



s x d	☒	Art.number	s x d	☒	Art.number	s x d	☒	Art.number
9X45MM	10	17447.090.045						

Gate hook with 2 screw eyes

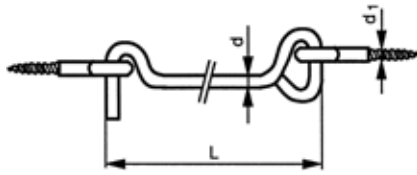

Technical data

L	d	d ₁
100	4,4	4
160	5,25	4,75
200	5,25	4,75
250	6	5,25

17571 Gate hook with 2 screw eyes article 63R

F11C



Material Stainless steel A2
Packaging Standard



5

L	☒	Art.number	L	☒	Art.number	L	☒	Art.number
100MM	50	17571.040.100	200MM	25	17571.052.200			
160MM	25	17571.052.160	250MM	25	17571.060.250			

S-Hook

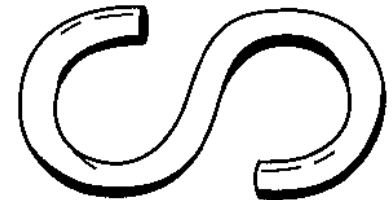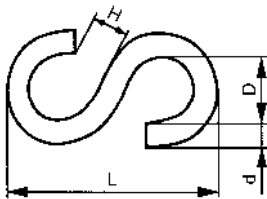

Technical data

No.	d	D	H	No.	d	D	H	No.	d	D	H
30	3	7	3,5	45	4,4	12	5	60	6	16	7
35	3,45	9	4	50	5	14	5,5	70	7	20	7,5
40	4	11	5	55	6	15	6	80	8,4	23	8,5

17380 S-Hook article 105G

F11B

Material Steel
Surface treatment Zinc plated
Packaging Standard



No.(L)	☒	Art.number	No.(L)	☒	Art.number	No.(L)	☒	Art.number
No.30 (25MM)	100	17380.000.030	No.45 (40MM)	100	17380.000.045	No.60 (55MM)	100	17380.000.060
No.35 (30MM)	100	17380.000.035	No.50 (45MM)	100	17380.000.050	No.70 (65MM)	50	17380.000.070
No.40 (35MM)	100	17380.000.040	No.55 (50MM)	100	17380.000.055	No.80 (75MM)	50	17380.000.080