



Slotted pan head tapping screw

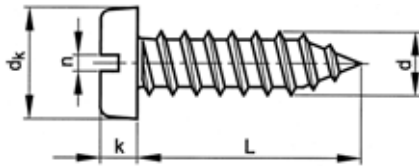

ISO 1481 C
 DIN 7971 C
 NF E25-663 C
 BS 4174



Technical data


d	P	dk	k	n
ST2,2	0,8	4,2	1,35	0,6
ST2,9	1,1	5,6	1,75	0,8
ST3,5	1,3	6,9	2,1	1
ST3,9	1,4	7,5	2,25	1
ST4,2	1,4	8,2	2,45	1,2
ST4,8	1,6	9,5	2,8	1,2
ST5,5	1,8	10,8	3,2	1,6
ST6,3	1,8	12,5	3,65	1,6

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	slotted	St	Zipl	Standard	26600	6-64
ST	slotted	St	Ni.pl.	Standard	26000	6-64
ST	slotted	St.St. A2		Standard	51600	6-65
ST	slotted	St	Ni.pl.	without point	26100	6-65

6

26600 Slotted pan head tapping screw		J02A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Standard	



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26600.029.006	ST3,9X25MM	200	26600.039.025	ST4,8X45MM	100	26600.048.045
ST2,9X9,5MM	200	26600.029.009	ST3,9X32MM	200	26600.039.032	ST5,5X13MM	200	26600.055.013
ST2,9X13MM	200	26600.029.013	ST3,9X38MM	200	26600.039.038	ST5,5X16MM	200	26600.055.016
ST2,9X16MM	200	26600.029.016	ST4,2X9,5MM	200	26600.042.009	ST5,5X19MM	200	26600.055.019
ST2,9X19MM	200	26600.029.019	ST4,2X13MM	200	26600.042.013	ST5,5X22MM	200	26600.055.022
ST2,9X22MM	200	26600.029.022	ST4,2X16MM	200	26600.042.016	ST5,5X25MM	100	26600.055.025
ST2,9X25MM	200	26600.029.025	ST4,2X19MM	200	26600.042.019	ST5,5X32MM	100	26600.055.032
ST3,5X6,5MM	200	26600.035.006	ST4,2X22MM	200	26600.042.022	ST5,5X38MM	100	26600.055.038
ST3,5X9,5MM	200	26600.035.009	ST4,2X25MM	200	26600.042.025	ST5,5X45MM	100	26600.055.045
ST3,5X13MM	200	26600.035.013	ST4,2X32MM	200	26600.042.032	ST5,5X50MM	100	26600.055.050
ST3,5X16MM	200	26600.035.016	ST4,2X38MM	200	26600.042.038	ST6,3X13MM	100	26600.063.013
ST3,5X19MM	200	26600.035.019	ST4,2X45MM	200	26600.042.045	ST6,3X16MM	100	26600.063.016
ST3,5X22MM	200	26600.035.022	ST4,2X50MM	200	26600.042.050	ST6,3X19MM	100	26600.063.019
ST3,5X25MM	200	26600.035.025	ST4,8X9,5MM	200	26600.048.009	ST6,3X25MM	100	26600.063.025
ST3,5X32MM	200	26600.035.032	ST4,8X13MM	200	26600.048.013	ST6,3X32MM	100	26600.063.032
ST3,5X38MM	200	26600.035.038	ST4,8X16MM	200	26600.048.016	ST6,3X38MM	100	26600.063.038
ST3,9X9,5MM	200	26600.039.009	ST4,8X19MM	200	26600.048.019	ST6,3X45MM	100	26600.063.045
ST3,9X13MM	200	26600.039.013	ST4,8X22MM	200	26600.048.022	ST6,3X50MM	100	26600.063.050
ST3,9X16MM	200	26600.039.016	ST4,8X25MM	200	26600.048.025			
ST3,9X19MM	200	26600.039.019	ST4,8X32MM	100	26600.048.032			
ST3,9X22MM	200	26600.039.022	ST4,8X38MM	100	26600.048.038			


- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26000 Slotted pan head tapping screw		J03A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Standard	




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26000.029.006	ST2,9X13MM	200	26000.029.013			
ST2,9X9,5MM	200	26000.029.009						

Hexagon washer faced head tapping screw

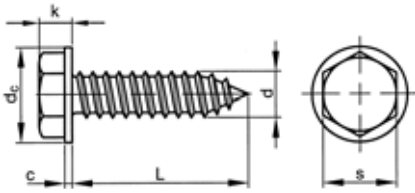

ISO ≈7053 C
DIN ≈6928 C
BS ≈7599



Technical data

	ST3,5	ST4,2	ST4,8
d	3,5	4,2	4,8
P	1,3	1,4	1,6
d_c	2,2	2,9	3,1
k	2,5	2,8	3,1
c	0,5	0,6	0,7
s	5,5	7	8

28100 SEMA Hexagon washer faced head tapping screw

J04A


Thread Self tapping thread
Material Steel
Surface treatment Zinc plated
Packaging Standard




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,5X9,5MM	200	28100.035.009	ST4,2X13MM	200	28100.042.013	ST4,8X16MM	200	28100.048.016
ST3,5X13MM	200	28100.035.013	ST4,2X16MM	200	28100.042.016	ST4,8X19MM	200	28100.048.019
ST3,5X16MM	200	28100.035.016	ST4,2X19MM	200	28100.042.019	ST4,8X25MM	200	28100.048.025
ST3,5X19MM	200	28100.035.019	ST4,2X25MM	200	28100.042.025	ST4,8X32MM	200	28100.048.032
ST4,2X9,5MM	200	28100.042.009	ST4,8X13MM	200	28100.048.013			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

Hexagon head tapping screw

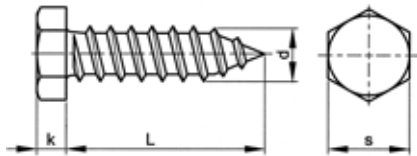

ISO 1479 C
 DIN 7976 C
 ANSI B18.6.5M
 NF E25-662 C
 BS 4174



Technical data

d	P	k	s
ST2,9	1,1	1,5	5
ST3,5	1,3	2,3	5,5
ST3,9	1,3	2,3	7
ST4,2	1,4	2,8	7
ST4,8	1,6	3	8
ST5,5	1,8	4	8
ST6,3	1,8	4,8	10
ST8	2,1	5,8	13

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	hexagon	St	Zipl	Standard	26080	6-90
ST	hexagon	St	Zipl	without point	26180	6-90
ST	hexagon	St.St. A2		Standard	51650	6-91

6

26080 Hexagon head tapping screw		J04A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Standard	



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST4,2X25MM	1000	26080.042.025	ST5,5X16MM	250	26080.055.016	ST6,3X38MM	100	26080.063.038
ST4,8X9,5MM	200	26080.048.009	ST6,3X13MM	100	26080.063.013	ST6,3X45MM	100	26080.063.045
ST4,8X13MM	250	26080.048.013	ST6,3X16MM	100	26080.063.016	ST6,3X50MM	100	26080.063.050
ST4,8X25MM	100	26080.048.025	ST6,3X19MM	100	26080.063.019			
ST4,8X38MM	200	26080.048.038	ST6,3X25MM	100	26080.063.025			
			ST6,3X32MM	100	26080.063.032			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26180 Hexagon head tapping screw without point		J04A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Standard	
	ISO 1479 F	
	DIN 7976 F	
	NF E25-662 F	



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST4,8X9,5MM	200	26180.048.009	ST6,3X13MM	100	26180.063.013	ST8(7,9)X19MM	100	26180.079.019
ST4,8X13MM	200	26180.048.013	ST6,3X16MM	100	26180.063.016	ST8(7,9)X25MM	100	26180.079.025
ST4,8X16MM	200	26180.048.016	ST6,3X19MM	100	26180.063.019			
ST4,8X19MM	200	26180.048.019	ST6,3X25MM	100	26180.063.025			
ST4,8X25MM	200	26180.048.025						
			ST8(7,9)X16MM	100	26180.079.016			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.


51650 Hexagon head tapping screw
R01A

Thread Self tapping thread
Material Stainless steel A2
Packaging Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM *	1000	51650.029.009	ST4,2X38MM *	500	51650.042.038	ST5,5X90MM *	200	51650.055.090
ST2,9X13MM *	1000	51650.029.013	ST4,2X45MM *	500	51650.042.045	ST6,3X13MM	100	51650.063.013
ST2,9X16MM *	1000	51650.029.016	ST4,2X50MM *	200	51650.042.050	ST6,3X16MM	100	51650.063.016
ST2,9X19MM *	1000	51650.029.019				ST6,3X19MM	100	51650.063.019
			ST4,8X9,5MM *	1000	51650.048.009	ST6,3X22MM	100	51650.063.022
ST3,5X13MM *	1000	51650.035.013	ST4,8X13MM	100	51650.048.013	ST6,3X25MM	100	51650.063.025
ST3,5X16MM *	1000	51650.035.016	ST4,8X16MM	100	51650.048.016	ST6,3X32MM *	500	51650.063.032
ST3,5X19MM *	1000	51650.035.019	ST4,8X19MM	100	51650.048.019	ST6,3X45MM *	200	51650.063.045
ST3,5X22MM *	1000	51650.035.022	ST4,8X25MM	100	51650.048.025	ST6,3X50MM *	200	51650.063.050
ST3,5X25MM *	1000	51650.035.025	ST4,8X32MM *	500	51650.048.032	ST6,3X60MM *	200	51650.063.060
ST3,5X32MM *	1000	51650.035.032	ST4,8X38MM *	500	51650.048.038	ST6,3X70MM *	200	51650.063.070
			ST4,8X45MM *	200	51650.048.045	ST6,3X80MM *	200	51650.063.080
ST3,9X9,5MM *	1000	51650.039.009	ST4,8X50MM *	200	51650.048.050	ST6,3X90MM *	200	51650.063.090
ST3,9X16MM *	1000	51650.039.016	ST4,8X60MM *	200	51650.048.060	ST6,3X100MM *	200	51650.063.100
ST3,9X19MM *	1000	51650.039.019	ST4,8X70MM *	200	51650.048.070			
ST3,9X22MM *	1000	51650.039.022	ST4,8X80MM *	200	51650.048.080	ST8,0X16MM *	200	51650.080.016
ST3,9X25MM *	1000	51650.039.025				ST8,0X19MM *	200	51650.080.019
ST3,9X32MM *	1000	51650.039.032	ST5,5X13MM *	1000	51650.055.013	ST8,0X22MM *	200	51650.080.022
ST3,9X38MM *	500	51650.039.038	ST5,5X16MM *	1000	51650.055.016	ST8,0X25MM *	200	51650.080.025
ST3,9X45MM *	500	51650.039.045	ST5,5X19MM *	1000	51650.055.019	ST8,0X32MM *	200	51650.080.032
			ST5,5X22MM *	1000	51650.055.022	ST8,0X38MM *	200	51650.080.038
ST4,2X9,5MM *	1000	51650.042.009	ST5,5X25MM *	500	51650.055.025	ST8,0X45MM *	200	51650.080.045
ST4,2X13MM	100	51650.042.013	ST5,5X38MM *	500	51650.055.038	ST8,0X50MM *	200	51650.080.050
ST4,2X16MM	100	51650.042.016	ST5,5X45MM *	200	51650.055.045	ST8,0X60MM *	200	51650.080.060
ST4,2X19MM *	1000	51650.042.019	ST5,5X50MM *	200	51650.055.050	ST8,0X70MM *	200	51650.080.070
ST4,2X22MM	100	51650.042.022	ST5,5X60MM *	200	51650.055.060			
ST4,2X25MM *	1000	51650.042.025	ST5,5X70MM *	200	51650.055.070			
ST4,2X32MM *	500	51650.042.032	ST5,5X80MM *	200	51650.055.080			

Hexagon tapping screw with cone end and captive washer

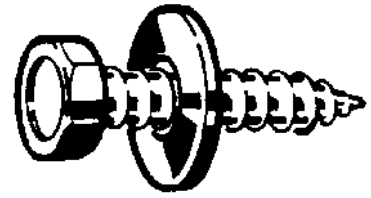

Technical data

d	Ring ø
ST4,8	12x1,6
ST5,6	14,8x1,6
ST6,5	18x1,6

72045 Hexagon tapping screw with cone end and captive washer

Y92D

Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST4,8X16MM	200	72045.048.016	ST5,6X16MM	200	72045.056.016	ST6,5X25MM	200	72045.065.025
ST4,8X19MM	200	72045.048.019	ST5,6X19MM	200	72045.056.019			
ST5,6X13MM	200	72045.056.013	ST6,5X20MM	200	72045.065.020			

6

Cross recessed tapping screw for license plates



Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	Phillips	St	Zipl	Standard	72008	6-93
ST	Phillips	St	Zipl	with snap cap	72005	6-93
ST	Pozidriv	St	FLZNYC	self-drilling	72022	6-93

72008 Cross recessed Phillips (H) tapping screw Y92D

Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard



d x L	Art.number	d x L	Art.number	d x L	Art.number
ST4,8X16MM	100 72008.048.016	ST4,8X25MM	100 72008.048.025	ST4,8X32MM	100 72008.048.032
ST4,8X19MM	100 72008.048.020				

72005 Cross recessed Phillips (H) pan head tapping screw with snap cap Y92D

Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard



d x L	Art.number	d x L	Art.number	d x L	Art.number
4,8X13 WHITE	100 72005.048.013				
4,8X19 YELLOW	100 72005.048.019				


72022 Cross recessed Pozidriv self-drilling screw Delta-Magni Y92A

Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc flake with Chrome - ISO 10683
Packaging	Standard



d x L	Art.number	d x L	Art.number	d x L	Art.number
5,0X16MM	100 72022.050.016				
5,0X19MM	100 72022.050.019				
5,0X25MM	100 72022.050.025				

Slotted screw for license plates

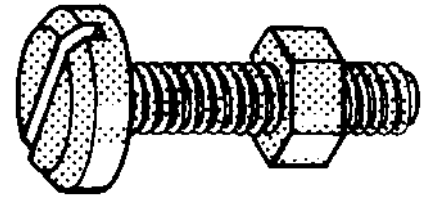


Article groups

Thread	Driving features	Material	Colour	Packaging	Code	Page
M	slotted	Plastic Nylon	Yellow	Standard	72000	6-94
M	slotted	Plastic Nylon	Black	Standard	72002	6-94

72000 Slotted screw for license plates Y92D

Thread	Metric thread
Material	Plastic Nylon (polyamide)
Colour	Yellow
Packaging	Standard




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
M6X16	100	72000.060.016						
M6X25	100	72000.060.025						

6


72002 Slotted screw for license plates Y92D

Thread	Metric thread
Material	Plastic Nylon (polyamide)
Colour	Black
Packaging	Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
M6X16	100	72002.060.016						

Cap (Snap)



Article groups

Material	Packaging	Code	Page
Plastic Nylon	Standard	72011	6-95
Plastic Nylon for Phillips	Standard	72018	6-95

72011 Cap (Snap)		Y92D
Material	Plastic Nylon (polyamide)	
Packaging	Standard	

Type	☒	Art.number	Type	☒	Art.number	Type	☒	Art.number
CAP YELLOW M5	100	72011.050.001						
CAP BLACK M5	100	72011.050.002						

- For screws.

72018 Cap (Snap)		Y92D
Material	Plastic Nylon (polyamide)	
Packaging	Standard	

Type	☒	Art.number	Type	☒	Art.number	Type	☒	Art.number
BLUE	100	72018.000.002	WHITE	100	72018.000.011			
YELLOW	100	72018.000.004	BLACK	100	72018.000.012			

- For cross recessed Phillips (H) tapping screws an for self-drilling cross recessed Phillips (H) tapping screws

26000 Slotted pan head tapping screw ←

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,5X9,5MM	200	26000.035.009	ST4,2X9,5MM	200	26000.042.009	ST4,8X45MM	100	26000.048.045
ST3,5X13MM	200	26000.035.013	ST4,2X13MM	200	26000.042.013	ST4,8X50MM	100	26000.048.050
ST3,5X16MM	200	26000.035.016	ST4,2X16MM	200	26000.042.016			
ST3,5X19MM	200	26000.035.019	ST4,2X19MM	200	26000.042.019	ST5,5X13MM	200	26000.055.013
ST3,5X25MM	200	26000.035.025	ST4,2X25MM	200	26000.042.025	ST5,5X16MM	200	26000.055.016
ST3,5X32MM	200	26000.035.032				ST5,5X19MM	200	26000.055.019
			ST4,8X9,5MM	200	26000.048.009	ST5,5X25MM	100	26000.055.025
ST3,9X9,5MM	200	26000.039.009	ST4,8X13MM	200	26000.048.013			
ST3,9X19MM	200	26000.039.019	ST4,8X16MM	200	26000.048.016	ST6,3X13MM	100	26000.063.013
ST3,9X25MM	200	26000.039.025	ST4,8X19MM	200	26000.048.019	ST6,3X16MM	100	26000.063.016
ST3,9X32MM	200	26000.039.032	ST4,8X25MM	200	26000.048.025	ST6,3X19MM	100	26000.063.019
ST3,9X38MM	200	26000.039.038	ST4,8X32MM	100	26000.048.032	ST6,3X25MM	100	26000.063.025
			ST4,8X38MM	100	26000.048.038			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

51600 Slotted pan head tapping screw R02A

Thread	Self tapping thread
Material	Stainless steel A2
Packaging	Standard

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	51600.022.006	ST3,9X19MM	200	51600.039.019	ST4,8X60MM	200	51600.048.060
ST2,2X9,5MM *	1000	51600.022.009	ST3,9X22MM	200	51600.039.022	ST4,8X70MM	200	51600.048.070
ST2,2X13MM *	1000	51600.022.013	ST3,9X25MM	200	51600.039.025			
ST2,2X16MM *	1000	51600.022.016	ST3,9X32MM	200	51600.039.032	ST5,5X13MM	200	51600.055.013
ST2,2X25MM *	1000	51600.022.025	ST3,9X38MM	200	51600.039.038	ST5,5X16MM	200	51600.055.016
						ST5,5X19MM	200	51600.055.019
ST2,9X6,5MM	200	51600.029.006	ST4,2X6,5MM *	1000	51600.042.006	ST5,5X19MM	200	51600.055.022
ST2,9X9,5MM	200	51600.029.009	ST4,2X9,5MM	200	51600.042.009	ST5,5X22MM	200	51600.055.022
ST2,9X13MM	200	51600.029.013	ST4,2X13MM	200	51600.042.013	ST5,5X25MM	200	51600.055.025
ST2,9X16MM	200	51600.029.016	ST4,2X16MM	200	51600.042.016	ST5,5X32MM	100	51600.055.032
ST2,9X19MM	200	51600.029.019	ST4,2X19MM	200	51600.042.019	ST5,5X38MM	100	51600.055.038
ST2,9X22MM	200	51600.029.022	ST4,2X25MM	200	51600.042.025	ST5,5X45MM	100	51600.055.045
ST2,9X25MM	200	51600.029.025	ST4,2X32MM	200	51600.042.032	ST5,5X50MM	100	51600.055.050
			ST4,2X38MM	200	51600.042.038	ST5,5X70MM *	200	51600.055.070
ST3,5X6,5MM	200	51600.035.006	ST4,2X45MM	200	51600.042.045			
ST3,5X9,5MM	200	51600.035.009	ST4,2X50MM	200	51600.042.050	ST6,3X13MM	100	51600.063.013
ST3,5X13MM	200	51600.035.013	ST4,2X60MM *	200	51600.042.060	ST6,3X16MM	100	51600.063.016
ST3,5X16MM	200	51600.035.016				ST6,3X19MM	100	51600.063.019
ST3,5X19MM	200	51600.035.019	ST4,8X9,5MM	200	51600.048.009	ST6,3X22MM	100	51600.063.022
ST3,5X22MM	200	51600.035.022	ST4,8X13MM	200	51600.048.013	ST6,3X25MM	100	51600.063.025
ST3,5X25MM	200	51600.035.025	ST4,8X16MM	200	51600.048.016	ST6,3X32MM	100	51600.063.032
ST3,5X32MM	200	51600.035.032	ST4,8X19MM	200	51600.048.019	ST6,3X38MM	100	51600.063.038
ST3,5X38MM	200	51600.035.038	ST4,8X22MM	200	51600.048.022	ST6,3X45MM	100	51600.063.045
			ST4,8X25MM	200	51600.048.025	ST6,3X50MM	100	51600.063.050
ST3,9X6,5MM	200	51600.039.006	ST4,8X32MM	200	51600.048.032	ST6,3X60MM *	200	51600.063.060
ST3,9X9,5MM	200	51600.039.009	ST4,8X38MM	200	51600.048.038	ST6,3X70MM *	200	51600.063.070
ST3,9X13MM	200	51600.039.013	ST4,8X45MM	200	51600.048.045			
ST3,9X16MM	200	51600.039.016	ST4,8X50MM	200	51600.048.050			

6


26100 Slotted pan head tapping screw without point J03A

Thread	Self tapping thread
Material	Steel
Surface treatment	Nickel plated
Packaging	Standard
	ISO 1481 F
	DIN 7971 F
	NF E25-663 F


d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X4,5MM	500	26100.022.004	ST2,2X9,5MM	500	26100.022.009			
ST2,2X6,5MM	500	26100.022.006						
ST2,2X8MM	500	26100.022.008	ST2,9X6,5MM	500	26100.029.006			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

Slotted countersunk head tapping screw

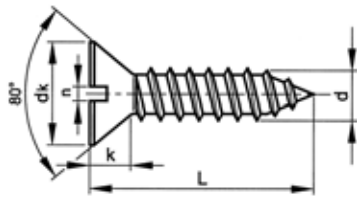

ISO 1482 C
 DIN 7972 C
 NF E25-660 C
 BS 4174



Technical data

d	P	d _k	k ≈	n
ST2,2	0,8	4,3	1,3	0,6
ST2,9	1,1	5,5	1,7	0,8
ST3,5	1,3	6,8	2,1	1
ST3,9	1,4	7,5	2,3	1
ST4,2	1,4	8,1	2,5	1,2
ST4,8	1,6	9,5	3	1,2
ST5,5	1,8	10,8	3,4	1,6
ST6,3	1,8	12,4	3,8	1,6

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	slotted	St	Zipl	Standard	26620	6-66
ST	slotted	St.St. A2		Standard	51620	6-66

6

26620 Slotted countersunk head tapping screw

J02A

Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26620.029.006	ST3,9X25MM	200	26620.039.025	ST4,8X45MM	100	26620.048.045
ST2,9X9,5MM	200	26620.029.009	ST3,9X32MM	200	26620.039.032	ST4,8X50MM	100	26620.048.050
ST2,9X13MM	200	26620.029.013	ST3,9X38MM	200	26620.039.038			
ST2,9X16MM	200	26620.029.016				ST5,5X13MM	200	26620.055.013
ST2,9X19MM	200	26620.029.019	ST4,2X9,5MM	200	26620.042.009	ST5,5X16MM	200	26620.055.016
ST2,9X25MM	200	26620.029.025	ST4,2X13MM	200	26620.042.013	ST5,5X19MM	200	26620.055.019
			ST4,2X16MM	200	26620.042.016	ST5,5X25MM	100	26620.055.025
ST3,5X9,5MM	200	26620.035.009	ST4,2X19MM	200	26620.042.019	ST5,5X32MM	100	26620.055.032
ST3,5X13MM	200	26620.035.013	ST4,2X22MM	200	26620.042.022	ST5,5X38MM	100	26620.055.038
ST3,5X16MM	200	26620.035.016	ST4,2X25MM	200	26620.042.025	ST5,5X45MM	100	26620.055.045
ST3,5X19MM	200	26620.035.019	ST4,2X32MM	200	26620.042.032	ST5,5X50MM	100	26620.055.050
ST3,5X22MM	200	26620.035.022	ST4,2X38MM	200	26620.042.038			
ST3,5X25MM	200	26620.035.025	ST4,2X45MM	200	26620.042.045	ST6,3X25MM	100	26620.063.025
ST3,5X32MM	200	26620.035.032				ST6,3X32MM	100	26620.063.032
			ST4,8X13MM	200	26620.048.013	ST6,3X38MM	100	26620.063.038
ST3,9X9,5MM	200	26620.039.009	ST4,8X16MM	200	26620.048.016	ST6,3X45MM	100	26620.063.045
ST3,9X13MM	200	26620.039.013	ST4,8X19MM	200	26620.048.019	ST6,3X50MM	100	26620.063.050
ST3,9X16MM	200	26620.039.016	ST4,8X25MM	200	26620.048.025			
ST3,9X19MM	200	26620.039.019	ST4,8X32MM	100	26620.048.032			
ST3,9X22MM	200	26620.039.022	ST4,8X38MM	100	26620.048.038			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

51620 Slotted countersunk head tapping screw

R02A

Thread	Self tapping thread
Material	Stainless steel A2
Packaging	Standard




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	51620.022.006	ST2,9X13MM	200	51620.029.013	ST3,5X13MM	200	51620.035.013
ST2,2X9,5MM *	1000	51620.022.009	ST2,9X16MM	200	51620.029.016	ST3,5X16MM	200	51620.035.016
ST2,2X13MM *	1000	51620.022.013	ST2,9X19MM	200	51620.029.019	ST3,5X19MM	200	51620.035.019
ST2,2X16MM *	1000	51620.022.016	ST2,9X25MM	200	51620.029.025	ST3,5X22MM	200	51620.035.022
						ST3,5X25MM	200	51620.035.025
ST2,9X6,5MM	200	51620.029.006	ST3,5X6,5MM	200	51620.035.006	ST3,5X32MM	200	51620.035.032
ST2,9X9,5MM	200	51620.029.009	ST3,5X9,5MM	200	51620.035.009	ST3,5X38MM	200	51620.035.038


51620 Slotted countersunk head tapping screw

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,9X9,5MM	200	51620.039.009	ST4,8X9,5MM	200	51620.048.009	ST5,5X32MM	100	51620.055.032
ST3,9X13MM	200	51620.039.013	ST4,8X13MM	200	51620.048.013	ST5,5X38MM	100	51620.055.038
ST3,9X16MM	200	51620.039.016	ST4,8X16MM	200	51620.048.016	ST5,5X45MM	100	51620.055.045
ST3,9X19MM	200	51620.039.019	ST4,8X19MM	200	51620.048.019	ST5,5X50MM	100	51620.055.050
ST3,9X22MM	200	51620.039.022	ST4,8X22MM	200	51620.048.022	ST5,5X70MM *	200	51620.055.070
ST3,9X25MM	200	51620.039.025	ST4,8X25MM	200	51620.048.025	ST6,3X13MM	100	51620.063.013
ST3,9X32MM	200	51620.039.032	ST4,8X32MM	200	51620.048.032	ST6,3X16MM	100	51620.063.016
ST3,9X38MM	200	51620.039.038	ST4,8X38MM	200	51620.048.038	ST6,3X19MM	100	51620.063.019
ST4,2X13MM	200	51620.042.013	ST4,8X45MM	200	51620.048.045	ST6,3X22MM	100	51620.063.022
ST4,2X16MM	200	51620.042.016	ST4,8X50MM	200	51620.048.050	ST6,3X25MM	100	51620.063.025
ST4,2X19MM	200	51620.042.019	ST4,8X80MM *	200	51620.048.080	ST6,3X32MM	100	51620.063.032
ST4,2X22MM	200	51620.042.022	ST5,5X13MM	200	51620.055.013	ST6,3X38MM	100	51620.063.038
ST4,2X25MM	200	51620.042.025	ST5,5X16MM	200	51620.055.016	ST6,3X45MM	100	51620.063.045
ST4,2X32MM	200	51620.042.032	ST5,5X19MM	200	51620.055.019	ST6,3X50MM	100	51620.063.050
ST4,2X38MM	200	51620.042.038	ST5,5X22MM	200	51620.055.022	ST6,3X70MM *	200	51620.063.070
ST4,2X45MM	200	51620.042.045	ST5,5X25MM	200	51620.055.025			

Slotted raised countersunk head tapping screw



ISO 1483 C
 DIN 7973 C
 NF E25-661 C
 BS 4174

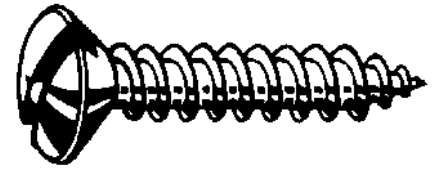

Technical data

d	P	dk	k ≈	f ≈	n
ST2,2	0,8	4,2	1,3	0,7	0,6
ST2,9	1,5	5,5	1,7	0,9	0,8
ST3,5	1,3	6,8	2,1	1,2	1
ST3,9	1,4	7,5	2,3	1,3	1
ST4,2	1,4	8,1	2,5	1,4	1,2
ST4,8	1,6	9,5	3	1,5	1,2
ST5,5	1,8	10,8	3,4	1,7	1,6
ST6,3	1,8	12,4	3,8	2	1,6

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	slotted	St	Zipl	Standard	26640	6-68
ST	slotted	St	Ni.pl.	Standard	26040	6-68
ST	slotted	St.St. A2		Standard	51640	6-69

6

26640 Slotted raised countersunk head tapping screw		J02A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Standard	



d x L	Art.number	d x L	Art.number	d x L	Art.number
ST2,9X9,5MM	200 26640.029.009	ST3,9X32MM	200 26640.039.032	ST4,8X45MM	100 26640.048.045
ST2,9X13MM	200 26640.029.013			ST4,8X50MM	100 26640.048.050
ST2,9X16MM	200 26640.029.016	ST4,2X9,5MM	200 26640.042.009	ST5,5X13MM	200 26640.055.013
ST2,9X19MM	200 26640.029.019	ST4,2X13MM	200 26640.042.013	ST5,5X16MM	200 26640.055.016
ST2,9X25MM	200 26640.029.025	ST4,2X16MM	200 26640.042.016	ST5,5X19MM	200 26640.055.019
		ST4,2X19MM	200 26640.042.019	ST5,5X25MM	100 26640.055.025
ST3,5X9,5MM	200 26640.035.009	ST4,2X25MM	200 26640.042.025	ST5,5X32MM	100 26640.055.032
ST3,5X13MM	200 26640.035.013	ST4,2X32MM	200 26640.042.032	ST5,5X38MM	100 26640.055.038
ST3,5X16MM	200 26640.035.016	ST4,2X38MM	200 26640.042.038	ST5,5X45MM	100 26640.055.045
ST3,5X19MM	200 26640.035.019	ST4,2X45MM	200 26640.042.045		
ST3,5X25MM	200 26640.035.025	ST4,2X50MM	200 26640.042.050		
ST3,5X32MM	200 26640.035.032			ST6,3X16MM	100 26640.063.016
ST3,5X38MM	200 26640.035.038	ST4,8X9,5MM	200 26640.048.009	ST6,3X19MM	100 26640.063.019
		ST4,8X13MM	200 26640.048.013	ST6,3X25MM	100 26640.063.025
ST3,9X9,5MM	200 26640.039.009	ST4,8X16MM	200 26640.048.016	ST6,3X32MM	100 26640.063.032
ST3,9X13MM	200 26640.039.013	ST4,8X19MM	200 26640.048.019	ST6,3X38MM	100 26640.063.038
ST3,9X16MM	200 26640.039.016	ST4,8X25MM	200 26640.048.025	ST6,3X45MM	100 26640.063.045
ST3,9X19MM	200 26640.039.019	ST4,8X32MM	100 26640.048.032	ST6,3X50MM	100 26640.063.050
ST3,9X25MM	200 26640.039.025	ST4,8X38MM	100 26640.048.038		

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26040 Slotted raised countersunk head tapping screw		J03A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Standard	



d x L	Art.number	d x L	Art.number	d x L	Art.number
ST2,9X13MM	200 26040.029.013	ST3,9X9,5MM	200 26040.039.009	ST3,9X38MM	200 26040.039.038
ST2,9X19MM	200 26040.029.019	ST3,9X13MM	200 26040.039.013	ST4,2X16MM	200 26040.042.016
ST3,5X13MM	200 26040.035.013	ST3,9X16MM	200 26040.039.016	ST4,2X19MM	200 26040.042.019
ST3,5X16MM	200 26040.035.016	ST3,9X19MM	200 26040.039.019	ST4,2X25MM	200 26040.042.025
ST3,5X19MM	200 26040.035.019	ST3,9X25MM	200 26040.039.025	ST4,2X38MM	200 26040.042.038
ST3,5X25MM	200 26040.035.025	ST3,9X32MM	200 26040.039.032		


26040 Slotted raised countersunk head tapping screw

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST4,8X13MM	200	26040.048.013	ST5,5X13MM	200	26040.055.013	ST6,3X25MM	100	26040.063.025
ST4,8X16MM	200	26040.048.016	ST5,5X16MM	200	26040.055.016	ST6,3X32MM	100	26040.063.032
ST4,8X19MM	200	26040.048.019	ST5,5X19MM	200	26040.055.019	ST6,3X38MM	100	26040.063.038
ST4,8X25MM	200	26040.048.025	ST5,5X25MM	100	26040.055.025			
			ST5,5X32MM	100	26040.055.032			
			ST5,5X50MM	100	26040.055.050			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.


51640 Slotted raised countersunk head tapping screw
R02A

Thread	Self tapping thread
Material	Stainless steel A2
Packaging	Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X9,5MM *	1000	51640.022.009	ST3,9X19MM	200	51640.039.019	ST4,8X38MM	200	51640.048.038
ST2,2X13MM *	1000	51640.022.013	ST3,9X22MM	200	51640.039.022	ST4,8X45MM	200	51640.048.045
			ST3,9X25MM	200	51640.039.025	ST4,8X50MM	200	51640.048.050
ST2,9X6,5MM	200	51640.029.006	ST3,9X32MM	200	51640.039.032	ST4,8X60MM *	200	51640.048.060
ST2,9X9,5MM	200	51640.029.009	ST3,9X38MM	200	51640.039.038	ST4,8X70MM *	200	51640.048.070
ST2,9X13MM	200	51640.029.013						
ST2,9X16MM	200	51640.029.016	ST4,2X9,5MM	200	51640.042.009	ST5,5X13MM	200	51640.055.013
ST2,9X19MM	200	51640.029.019	ST4,2X13MM	200	51640.042.013	ST5,5X19MM	200	51640.055.019
ST2,9X22MM	200	51640.029.022	ST4,2X16MM	200	51640.042.016	ST5,5X22MM	200	51640.055.022
ST2,9X25MM	200	51640.029.025	ST4,2X19MM	200	51640.042.019	ST5,5X25MM	200	51640.055.025
			ST4,2X22MM	200	51640.042.022	ST5,5X32MM	100	51640.055.032
ST3,5X6,5MM	200	51640.035.006	ST4,2X25MM	200	51640.042.025	ST5,5X38MM	100	51640.055.038
ST3,5X9,5MM	200	51640.035.009	ST4,2X32MM	200	51640.042.032	ST5,5X45MM	100	51640.055.045
ST3,5X13MM	200	51640.035.013	ST4,2X38MM	200	51640.042.038	ST5,5X50MM	100	51640.055.050
ST3,5X16MM	200	51640.035.016	ST4,2X45MM	200	51640.042.045			
ST3,5X19MM	200	51640.035.019	ST4,2X50MM	200	51640.042.050	ST6,3X13MM	100	51640.063.013
ST3,5X22MM	200	51640.035.022				ST6,3X16MM	100	51640.063.016
ST3,5X25MM	200	51640.035.025	ST4,8X9,5MM	200	51640.048.009	ST6,3X19MM	100	51640.063.019
ST3,5X32MM	200	51640.035.032	ST4,8X13MM	200	51640.048.013	ST6,3X25MM	100	51640.063.025
ST3,5X38MM	200	51640.035.038	ST4,8X16MM	200	51640.048.016	ST6,3X32MM	100	51640.063.032
			ST4,8X19MM	200	51640.048.019	ST6,3X38MM	100	51640.063.038
ST3,9X9,5MM	200	51640.039.009	ST4,8X22MM	200	51640.048.022	ST6,3X45MM	100	51640.063.045
ST3,9X13MM	200	51640.039.013	ST4,8X25MM	200	51640.048.025	ST6,3X50MM	100	51640.063.050
ST3,9X16MM	200	51640.039.016	ST4,8X32MM	200	51640.048.032			

Cross recessed pan head tapping screw

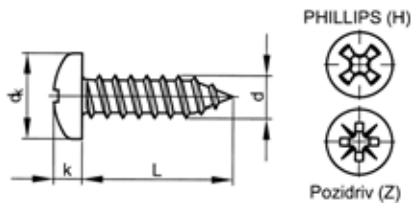

ISO 7049 C
 DIN 7981 C
 ANSI B18.6.4



Technical data

d	P	dk	k	No. cross recess
ST2,2	0,8	4,2	1,8	1
ST2,9	1,1	5,6	2,2	1
ST3,5	1,3	6,9	2,6	2
ST3,9	1,4	7,5	2,8	2
ST4,2	1,4	8,2	3,05	2
ST4,8	1,6	9,5	3,55	2
ST5,5	1,8	10,8	3,95	3
ST6,3	1,8	12,5	4,55	3

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	Phillips	St	Zipl	Standard	26660	6-70
ST	Phillips	St	Zipl	Large	26670	6-71
ST	Phillips	St	Ni.pl.	Standard	26200	6-71
ST	Phillips	St	Ni.pl.	Large	26210	6-71
ST	Phillips	St	Zipl blk p.	Standard	26400	6-72
ST	Pozidriv	St	Zipl blk p.	Standard	26402	6-72
ST	Phillips	St.St. A2		Standard	51660	6-72
ST	Phillips	St.St. A2		Large	51670	6-73
ST	Pozidriv	St.St. A2		Standard	51661	6-73
ST	Phillips	St.St. A4		Standard	55660	6-74
ST	Pozidriv	St	Zipl	Standard	26760	6-74
ST	Phillips	St	Ni.pl.	without point	26300	6-75

6

26660 Cross recessed pan head tapping screw Phillips

J01B

Thread Self tapping thread
Material Steel
Surface treatment Zinc plated
Packaging Standard
 ISO 7049 C-H
 DIN 7981 C-H



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM	200	26660.022.006	ST3,9X16MM	200	26660.039.016	ST4,8X50MM	100	26660.048.050
ST2,2X16MM	200	26660.022.016	ST3,9X19MM	200	26660.039.019			
			ST3,9X22MM	200	26660.039.022	ST5,5X13MM	200	26660.055.013
ST2,9X6,5MM	200	26660.029.006	ST3,9X25MM	200	26660.039.025	ST5,5X16MM	200	26660.055.016
ST2,9X9,5MM	200	26660.029.009	ST3,9X32MM	200	26660.039.032	ST5,5X19MM	200	26660.055.019
ST2,9X13MM	200	26660.029.013				ST5,5X22MM	100	26660.055.022
ST2,9X16MM	200	26660.029.016	ST4,2X9,5MM	200	26660.042.009	ST5,5X25MM	100	26660.055.025
ST2,9X19MM	200	26660.029.019	ST4,2X13MM	200	26660.042.013	ST5,5X32MM	100	26660.055.032
ST2,9X22MM	200	26660.029.022	ST4,2X16MM	200	26660.042.016	ST5,5X38MM	100	26660.055.038
ST2,9X25MM	200	26660.029.025	ST4,2X19MM	200	26660.042.019	ST5,5X45MM	100	26660.055.045
			ST4,2X22MM	200	26660.042.022	ST5,5X50MM	100	26660.055.050
ST3,5X6,5MM	200	26660.035.006	ST4,2X25MM	200	26660.042.025			
ST3,5X9,5MM	200	26660.035.009	ST4,2X32MM	200	26660.042.032	ST6,3X13MM	100	26660.063.013
ST3,5X13MM	200	26660.035.013	ST4,2X38MM	200	26660.042.038	ST6,3X16MM	100	26660.063.016
ST3,5X16MM	200	26660.035.016				ST6,3X19MM	100	26660.063.019
ST3,5X19MM	200	26660.035.019	ST4,8X9,5MM	200	26660.048.009	ST6,3X22MM	100	26660.063.022
ST3,5X22MM	200	26660.035.022	ST4,8X13MM	200	26660.048.013	ST6,3X25MM	100	26660.063.025
ST3,5X25MM	200	26660.035.025	ST4,8X16MM	200	26660.048.016	ST6,3X32MM	100	26660.063.032
ST3,5X32MM	200	26660.035.032	ST4,8X19MM	200	26660.048.019	ST6,3X38MM	100	26660.063.038
ST3,5X38MM	200	26660.035.038	ST4,8X22MM	200	26660.048.022	ST6,3X45MM	100	26660.063.045
			ST4,8X25MM	200	26660.048.025	ST6,3X50MM	100	26660.063.050
ST3,9X6,5MM	200	26660.039.006	ST4,8X32MM	100	26660.048.032			
ST3,9X9,5MM	200	26660.039.009	ST4,8X38MM	100	26660.048.038			
ST3,9X13MM	200	26660.039.013	ST4,8X45MM	100	26660.048.045			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26670 Cross recessed pan head tapping screw Phillips		J01B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Large ISO 7049 C-H DIN 7981 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	2000	26670.029.006	ST3,5X22MM	2000	26670.035.022	ST4,2X32MM	500	26670.042.032
ST2,9X9,5MM	2000	26670.029.009	ST3,5X25MM	2000	26670.035.025	ST4,2X50MM	500	26670.042.050
ST2,9X13MM	2000	26670.029.013						
ST2,9X16MM	2000	26670.029.016	ST3,9X9,5MM	1000	26670.039.009	ST4,8X13MM	1000	26670.048.013
ST2,9X19MM	2000	26670.029.019	ST3,9X16MM	1000	26670.039.016	ST4,8X16MM	1000	26670.048.016
						ST4,8X19MM	1000	26670.048.019
ST3,5X6,5MM	2000	26670.035.006	ST4,2X9,5MM	1000	26670.042.009	ST4,8X25MM	1000	26670.048.025
ST3,5X9,5MM	2000	26670.035.009	ST4,2X13MM	1000	26670.042.013	ST4,8X32MM	500	26670.048.032
ST3,5X13MM	2000	26670.035.013	ST4,2X16MM	1000	26670.042.016	ST4,8X38MM	500	26670.048.038
ST3,5X16MM	2000	26670.035.016	ST4,2X19MM	1000	26670.042.019			
ST3,5X19MM	2000	26670.035.019	ST4,2X25MM	1000	26670.042.025			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26200 Cross recessed pan head tapping screw Phillips		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Standard ISO 7049 C-H DIN 7981 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26200.029.006	ST3,9X16MM	200	26200.039.016	ST4,8X38MM	100	26200.048.038
ST2,9X9,5MM	200	26200.029.009	ST3,9X19MM	200	26200.039.019			
ST2,9X13MM	200	26200.029.013	ST3,9X25MM	200	26200.039.025	ST5,5X13MM	200	26200.055.013
ST2,9X16MM	200	26200.029.016				ST5,5X16MM	200	26200.055.016
ST2,9X19MM	200	26200.029.019	ST4,2X9,5MM	200	26200.042.009	ST5,5X19MM	200	26200.055.019
			ST4,2X13MM	200	26200.042.013	ST5,5X25MM	100	26200.055.025
ST3,5X6,5MM	200	26200.035.006	ST4,2X16MM	200	26200.042.016	ST5,5X32MM	100	26200.055.032
ST3,5X9,5MM	200	26200.035.009	ST4,2X19MM	200	26200.042.019	ST5,5X38MM	100	26200.055.038
ST3,5X13MM	200	26200.035.013	ST4,2X25MM	200	26200.042.025			
ST3,5X16MM	200	26200.035.016	ST4,2X32MM	200	26200.042.032	ST6,3X13MM	100	26200.063.013
ST3,5X19MM	200	26200.035.019	ST4,2X38MM	200	26200.042.038	ST6,3X16MM	100	26200.063.016
ST3,5X25MM	200	26200.035.025				ST6,3X19MM	100	26200.063.019
ST3,5X32MM	200	26200.035.032	ST4,8X13MM	200	26200.048.013	ST6,3X25MM	100	26200.063.025
ST3,5X38MM	200	26200.035.038	ST4,8X16MM	200	26200.048.016	ST6,3X32MM	100	26200.063.032
			ST4,8X19MM	200	26200.048.019	ST6,3X38MM	100	26200.063.038
ST3,9X9,5MM	200	26200.039.009	ST4,8X25MM	200	26200.048.025			
ST3,9X13MM	200	26200.039.013	ST4,8X32MM	100	26200.048.032			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26210 Cross recessed pan head tapping screw Phillips		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Large ISO 7049 C-H DIN 7981 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,5X6,5MM	2000	26210.035.006	ST4,2X9,5MM	1000	26210.042.009	ST4,8X13MM	1000	26210.048.013
ST3,5X9,5MM	2000	26210.035.009	ST4,2X13MM	1000	26210.042.013	ST4,8X16MM	1000	26210.048.016
ST3,5X13MM	2000	26210.035.013	ST4,2X16MM	1000	26210.042.016			
ST3,5X16MM	2000	26210.035.016	ST4,2X19MM	1000	26210.042.019			
ST3,5X19MM	2000	26210.035.019	ST4,2X45MM	500	26210.042.045			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26400 Cross recessed pan head tapping screw Phillips		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated black passivated	
Packaging	Standard ISO 7049 C-H DIN 7981 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26400.029.006	ST3,9X9,5MM	200	26400.039.009	ST4,8X16MM	200	26400.048.016
ST2,9X9,5MM	200	26400.029.009	ST3,9X13MM	200	26400.039.013	ST4,8X19MM	200	26400.048.019
ST2,9X13MM	200	26400.029.013	ST3,9X16MM	200	26400.039.016	ST4,8X25MM	200	26400.048.025
ST2,9X16MM	200	26400.029.016	ST3,9X19MM	200	26400.039.019	ST4,8X32MM	100	26400.048.032
ST2,9X19MM	200	26400.029.019	ST3,9X25MM	200	26400.039.025	ST4,8X38MM	100	26400.048.038
ST2,9X25MM	200	26400.029.025				ST4,8X50MM	100	26400.048.050
ST3,5X6,5MM	200	26400.035.006	ST4,2X9,5MM	200	26400.042.009	ST5,5X13MM	200	26400.055.013
ST3,5X9,5MM	200	26400.035.009	ST4,2X13MM	200	26400.042.013	ST5,5X16MM	200	26400.055.016
ST3,5X13MM	200	26400.035.013	ST4,2X16MM	200	26400.042.016	ST5,5X19MM	200	26400.055.019
ST3,5X16MM	200	26400.035.016	ST4,2X19MM	200	26400.042.019	ST5,5X25MM	100	26400.055.025
ST3,5X19MM	200	26400.035.019	ST4,2X25MM	200	26400.042.025	ST5,5X32MM	100	26400.055.032
ST3,5X25MM	200	26400.035.025	ST4,2X32MM	200	26400.042.032	ST5,5X38MM	100	26400.055.038
ST3,5X32MM	200	26400.035.032	ST4,2X38MM	200	26400.042.038	ST5,5X45MM	100	26400.055.045
ST3,5X38MM	200	26400.035.038	ST4,2X50MM	200	26400.042.050	ST5,5X50MM	100	26400.055.050
			ST4,8X13MM	200	26400.048.013			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26402 Cross recessed pan head tapping screw Pozidriv		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated black passivated	
Packaging	Standard ISO 7049 C-Z DIN 7981 C-Z NF E25-658 C	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26402.029.006	ST3,9X13MM	200	26402.039.013	ST4,8X13MM	200	26402.048.013
ST2,9X9,5MM	200	26402.029.009	ST3,9X16MM	200	26402.039.016	ST4,8X16MM	200	26402.048.016
ST2,9X13MM	200	26402.029.013	ST3,9X19MM	200	26402.039.019	ST4,8X19MM	200	26402.048.019
ST2,9X16MM	200	26402.029.016	ST3,9X25MM	200	26402.039.025	ST4,8X25MM	200	26402.048.025
ST2,9X19MM	200	26402.029.019				ST4,8X32MM	100	26402.048.032
ST2,9X25MM	200	26402.029.025	ST4,2X9,5MM	200	26402.042.009	ST4,8X38MM	100	26402.048.038
ST3,5X6,5MM	200	26402.035.006	ST4,2X13MM	200	26402.042.013	ST4,8X50MM	100	26402.048.050
ST3,5X9,5MM	200	26402.035.009	ST4,2X16MM	200	26402.042.016	ST5,5X13MM	200	26402.055.013
ST3,5X13MM	200	26402.035.013	ST4,2X19MM	200	26402.042.019	ST5,5X16MM	200	26402.055.016
ST3,5X16MM	200	26402.035.016	ST4,2X25MM	200	26402.042.025	ST5,5X19MM	200	26402.055.019
ST3,5X19MM	200	26402.035.019	ST4,2X32MM	200	26402.042.032	ST5,5X25MM	100	26402.055.025
ST3,5X25MM	200	26402.035.025	ST4,2X38MM	200	26402.042.038			
			ST4,2X50MM	200	26402.042.050	ST6,3X19MM	100	26402.063.019

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

51660 Cross recessed pan head tapping screw Phillips		R01A
Thread	Self tapping thread	
Material	Stainless steel A2	
Packaging	Standard ISO 7049 C-H DIN 7981 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X4,5MM *	1000	51660.022.004	ST3,5X9,5MM	200	51660.035.009	ST3,9X22MM	200	51660.039.022
ST2,2X9,5MM *	1000	51660.022.009	ST3,5X13MM	200	51660.035.013	ST3,9X25MM	200	51660.039.025
ST2,2X13MM *	1000	51660.022.013	ST3,5X16MM	200	51660.035.016	ST3,9X28MM *	1000	51660.039.028
ST2,2X16MM *	1000	51660.022.016	ST3,5X19MM	200	51660.035.019	ST3,9X32MM	200	51660.039.032
ST2,2X19MM *	1000	51660.022.019	ST3,5X22MM	200	51660.035.022	ST3,9X38MM	200	51660.039.038
ST2,2X22MM *	1000	51660.022.022	ST3,5X25MM	200	51660.035.025	ST3,9X45MM *	500	51660.039.045
ST2,2X25MM *	1000	51660.022.025	ST3,5X32MM	200	51660.035.032	ST3,9X60MM *	500	51660.039.060
			ST3,5X38MM	200	51660.035.038	ST3,9X70MM *	500	51660.039.070
ST2,9X6,5MM	200	51660.029.006	ST3,5X45MM *	500	51660.035.045			
ST2,9X9,5MM	200	51660.029.009	ST3,5X50MM *	500	51660.035.050	ST4,2X9,5MM	200	51660.042.009
ST2,9X13MM	200	51660.029.013	ST3,5X60MM *	500	51660.035.060	ST4,2X13MM	200	51660.042.013
ST2,9X16MM	200	51660.029.016	ST3,5X70MM *	500	51660.035.070	ST4,2X16MM	200	51660.042.016
ST2,9X19MM	200	51660.029.019				ST4,2X19MM	200	51660.042.019
ST2,9X22MM	200	51660.029.022	ST3,9X6,5MM *	1000	51660.039.006	ST4,2X22MM	200	51660.042.022
ST2,9X25MM	200	51660.029.025	ST3,9X9,5MM	200	51660.039.009	ST4,2X25MM	200	51660.042.025
ST2,9X32MM *	1000	51660.029.032	ST3,9X13MM	200	51660.039.013	ST4,2X32MM	200	51660.042.032
			ST3,9X16MM	200	51660.039.016	ST4,2X38MM	200	51660.042.038
ST3,5X6,5MM	200	51660.035.006	ST3,9X19MM	200	51660.039.019	ST4,2X45MM	200	51660.042.045

51660 Cross recessed pan head tapping screw Phillips

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST4,2X50MM	200	51660.042.050	ST4,8X90MM *	200	51660.048.090	ST5,5X120MM *	200	51660.055.120
ST4,2X60MM	200	51660.042.060	ST4,8X100MM	100	51660.048.100			
ST4,2X70MM *	200	51660.042.070	ST4,8X120MM *	200	51660.048.120	ST6,3X13MM	100	51660.063.013
ST4,2X80MM *	200	51660.042.080				ST6,3X16MM	100	51660.063.016
						ST6,3X19MM	100	51660.063.019
ST4,8X9,5MM	200	51660.048.009	ST5,5X13MM	200	51660.055.013	ST6,3X22MM	100	51660.063.022
ST4,8X13MM	200	51660.048.013	ST5,5X16MM	200	51660.055.016	ST6,3X25MM	100	51660.063.025
ST4,8X16MM	200	51660.048.016	ST5,5X19MM	200	51660.055.019	ST6,3X32MM	100	51660.063.032
ST4,8X19MM	200	51660.048.019	ST5,5X22MM	200	51660.055.022	ST6,3X38MM	100	51660.063.038
ST4,8X22MM	200	51660.048.022	ST5,5X25MM	200	51660.055.025	ST6,3X45MM	100	51660.063.045
ST4,8X25MM	200	51660.048.025	ST5,5X32MM	100	51660.055.032	ST6,3X50MM	100	51660.063.050
ST4,8X32MM	200	51660.048.032	ST5,5X38MM	100	51660.055.038	ST6,3X60MM *	200	51660.063.060
ST4,8X35MM *	500	51660.048.035	ST5,5X42MM *	500	51660.055.042	ST6,3X70MM *	200	51660.063.070
ST4,8X38MM	200	51660.048.038	ST5,5X45MM	100	51660.055.045	ST6,3X80MM *	200	51660.063.080
ST4,8X45MM	200	51660.048.045	ST5,5X50MM	100	51660.055.050	ST6,3X90MM *	200	51660.063.090
ST4,8X50MM	200	51660.048.050	ST5,5X55MM *	200	51660.055.055	ST6,3X100MM *	200	51660.063.100
ST4,8X55MM *	200	51660.048.055	ST5,5X60MM *	200	51660.055.060	ST6,3X120MM *	200	51660.063.120
ST4,8X60MM	200	51660.048.060	ST5,5X70MM *	200	51660.055.070			
ST4,8X70MM	200	51660.048.070	ST5,5X80MM *	200	51660.055.080			
ST4,8X80MM	200	51660.048.080	ST5,5X90MM *	200	51660.055.090			
			ST5,5X100MM *	200	51660.055.100			

51670 Cross recessed pan head tapping screw Phillips
R01A

Thread Self tapping thread
Material Stainless steel A2
Packaging Large
 ISO 7049 C-H
DIN 7981 C-H



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,5X9,5MM	1000	51670.035.009	ST4,2X38MM	500	51670.042.038	ST4,8X19MM	1000	51670.048.019
ST4,2X13MM	1000	51670.042.013	ST4,2X50MM	1000	51670.042.050	ST4,8X25MM	1000	51670.048.025
ST4,2X16MM	1000	51670.042.016				ST4,8X38MM	500	51670.048.038
ST4,2X19MM	1000	51670.042.019	ST4,8X9,5MM	1000	51670.048.009	ST4,8X50MM	500	51670.048.050
ST4,2X25MM	1000	51670.042.025	ST4,8X13MM	1000	51670.048.013			
ST4,2X32MM	1000	51670.042.032	ST4,8X16MM	1000	51670.048.016			

6
51661 Cross recessed pan head tapping screw Pozidriv
R01A

Thread Self tapping thread
Material Stainless steel A2
Packaging Standard
 ISO 7049 C-Z
DIN 7981 C-Z
 NF E25-658 C



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	51661.022.006	ST3,9X25MM	200	51661.039.025	ST4,8X50MM	200	51661.048.050
ST2,2X9,5MM *	1000	51661.022.009	ST3,9X32MM	200	51661.039.032	ST4,8X80MM *	200	51661.048.080
			ST3,9X38MM	200	51661.039.038	ST4,8X90MM *	200	51661.048.090
ST2,9X6,5MM	200	51661.029.006	ST3,9X45MM *	500	51661.039.045	ST4,8X100MM *	200	51661.048.100
ST2,9X9,5MM	200	51661.029.009	ST3,9X50MM *	500	51661.039.050			
ST2,9X13MM	200	51661.029.013				ST5,5X13MM	200	51661.055.013
ST2,9X16MM	200	51661.029.016	ST4,2X9,5MM	200	51661.042.009	ST5,5X16MM	200	51661.055.016
ST2,9X19MM	200	51661.029.019	ST4,2X13MM	200	51661.042.013	ST5,5X19MM	200	51661.055.019
ST2,9X25MM	200	51661.029.025	ST4,2X16MM	200	51661.042.016	ST5,5X22MM *	1000	51661.055.022
ST2,9X32MM *	1000	51661.029.032	ST4,2X19MM	200	51661.042.019	ST5,5X25MM	200	51661.055.025
			ST4,2X25MM	200	51661.042.025	ST5,5X32MM	100	51661.055.032
ST3,5X6,5MM	200	51661.035.006	ST4,2X32MM	200	51661.042.032	ST5,5X38MM	100	51661.055.038
ST3,5X9,5MM	200	51661.035.009	ST4,2X38MM	200	51661.042.038	ST5,5X45MM	100	51661.055.045
ST3,5X13MM	200	51661.035.013	ST4,2X45MM	200	51661.042.045	ST5,5X50MM	100	51661.055.050
ST3,5X16MM	200	51661.035.016	ST4,2X50MM	200	51661.042.050	ST5,5X70MM *	200	51661.055.070
ST3,5X19MM	200	51661.035.019	ST4,2X70MM *	200	51661.042.070			
ST3,5X25MM	200	51661.035.025				ST6,3X16MM	100	51661.063.016
ST3,5X32MM	200	51661.035.032	ST4,8X9,5MM	200	51661.048.009	ST6,3X19MM	100	51661.063.019
ST3,5X38MM	200	51661.035.038	ST4,8X13MM	200	51661.048.013	ST6,3X25MM	100	51661.063.025
			ST4,8X16MM	200	51661.048.016	ST6,3X32MM	100	51661.063.032
ST3,9X6,5MM *	1000	51661.039.006	ST4,8X19MM	200	51661.048.019	ST6,3X38MM	100	51661.063.038
ST3,9X9,5MM	200	51661.039.009	ST4,8X25MM	200	51661.048.025	ST6,3X50MM	100	51661.063.050
ST3,9X13MM	200	51661.039.013	ST4,8X32MM	200	51661.048.032			
ST3,9X16MM	200	51661.039.016	ST4,8X38MM	200	51661.048.038			
ST3,9X19MM	200	51661.039.019	ST4,8X45MM	200	51661.048.045			


55660 Cross recessed pan head tapping screw Phillips		R41A
Thread	Self tapping thread	
Material	Stainless steel A4	
Packaging	Standard	
	ISO 7049 C-H DIN 7981 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	55660.022.006	ST3,9X38MM *	500	55660.039.038	ST5,5X13MM	200	55660.055.013
ST2,2X13MM *	1000	55660.022.013	ST3,9X45MM *	500	55660.039.045	ST5,5X16MM	200	55660.055.016
ST2,9X6,5MM	200	55660.029.006	ST4,2X9,5MM	200	55660.042.009	ST5,5X19MM	200	55660.055.019
ST2,9X9,5MM	200	55660.029.009	ST4,2X13MM	200	55660.042.013	ST5,5X22MM	200	55660.055.022
ST2,9X13MM	200	55660.029.013	ST4,2X16MM	200	55660.042.016	ST5,5X25MM	200	55660.055.025
ST2,9X16MM	200	55660.029.016	ST4,2X19MM	200	55660.042.019	ST5,5X32MM	100	55660.055.032
ST2,9X19MM	200	55660.029.019	ST4,2X22MM	200	55660.042.022	ST5,5X38MM	100	55660.055.038
ST2,9X22MM *	1000	55660.029.022	ST4,2X25MM	200	55660.042.025	ST5,5X45MM	100	55660.055.045
ST2,9X25MM *	1000	55660.029.025	ST4,2X32MM	200	55660.042.032	ST5,5X50MM	100	55660.055.050
ST2,9X32MM *	1000	55660.029.032	ST4,2X38MM	200	55660.042.038	ST5,5X60MM *	200	55660.055.060
ST3,5X6,5MM *	1000	55660.035.006	ST4,2X45MM *	500	55660.042.045	ST5,5X70MM *	200	55660.055.070
ST3,5X9,5MM	200	55660.035.009	ST4,2X50MM *	200	55660.042.050	ST5,5X80MM *	200	55660.055.080
ST3,5X13MM	200	55660.035.013	ST4,2X60MM *	200	55660.042.060	ST5,5X100MM *	200	55660.055.100
ST3,5X16MM	200	55660.035.016	ST4,2X70MM *	200	55660.042.070	ST6,3X13MM	100	55660.063.013
ST3,5X19MM	200	55660.035.019	ST4,8X9,5MM *	1000	55660.048.009	ST6,3X16MM	100	55660.063.016
ST3,5X22MM	200	55660.035.022	ST4,8X13MM	200	55660.048.013	ST6,3X19MM	100	55660.063.019
ST3,5X25MM	200	55660.035.025	ST4,8X16MM	200	55660.048.016	ST6,3X22MM	100	55660.063.022
ST3,5X32MM	200	55660.035.032	ST4,8X19MM	200	55660.048.019	ST6,3X25MM	100	55660.063.025
ST3,5X38MM *	1000	55660.035.038	ST4,8X22MM	200	55660.048.022	ST6,3X32MM	100	55660.063.032
ST3,9X9,5MM	200	55660.039.009	ST4,8X25MM	200	55660.048.025	ST6,3X38MM	100	55660.063.038
ST3,9X13MM	200	55660.039.013	ST4,8X32MM	200	55660.048.032	ST6,3X45MM	100	55660.063.045
ST3,9X16MM	200	55660.039.016	ST4,8X38MM	200	55660.048.038	ST6,3X50MM	100	55660.063.050
ST3,9X19MM	200	55660.039.019	ST4,8X45MM *	200	55660.048.045	ST6,3X60MM *	200	55660.063.060
ST3,9X22MM	200	55660.039.022	ST4,8X50MM	200	55660.048.050	ST6,3X70MM *	200	55660.063.070
ST3,9X25MM	200	55660.039.025	ST4,8X60MM *	200	55660.048.060	ST6,3X80MM *	200	55660.063.080
ST3,9X32MM *	1000	55660.039.032	ST4,8X70MM *	200	55660.048.070			

26760 Cross recessed pan head tapping screw Pozidriv		J01A
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Standard	
	ISO 7049 C-Z DIN 7981 C-Z NF E25-658 C	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM	200	26760.022.006	ST3,9X25MM	200	26760.039.025	ST5,5X13MM	200	26760.055.013
ST2,9X6,5MM	200	26760.029.006	ST4,2X9,5MM	200	26760.042.009	ST5,5X16MM	200	26760.055.016
ST2,9X9,5MM	200	26760.029.009	ST4,2X13MM	200	26760.042.013	ST5,5X19MM	200	26760.055.019
ST2,9X13MM	200	26760.029.013	ST4,2X16MM	200	26760.042.016	ST5,5X25MM	100	26760.055.025
ST2,9X16MM	200	26760.029.016	ST4,2X19MM	200	26760.042.019	ST5,5X32MM	100	26760.055.032
ST2,9X19MM	200	26760.029.019	ST4,2X25MM	200	26760.042.025	ST5,5X38MM	100	26760.055.038
ST2,9X25MM	200	26760.029.025	ST4,2X32MM	200	26760.042.032	ST5,5X45MM	100	26760.055.045
ST3,5X6,5MM	200	26760.035.006	ST4,2X38MM	200	26760.042.038	ST5,5X50MM	100	26760.055.050
ST3,5X9,5MM	200	26760.035.009	ST4,2X45MM	200	26760.042.045	ST6,3X13MM	100	26760.063.013
ST3,5X13MM	200	26760.035.013	ST4,2X50MM	200	26760.042.050	ST6,3X16MM	100	26760.063.016
ST3,5X16MM	200	26760.035.016	ST4,8X9,5MM	200	26760.048.009	ST6,3X19MM	100	26760.063.019
ST3,5X19MM	200	26760.035.019	ST4,8X13MM	200	26760.048.013	ST6,3X25MM	100	26760.063.025
ST3,5X25MM	200	26760.035.025	ST4,8X16MM	200	26760.048.016	ST6,3X32MM	100	26760.063.032
ST3,5X32MM	200	26760.035.032	ST4,8X19MM	200	26760.048.019	ST6,3X38MM	100	26760.063.038
ST3,5X38MM	200	26760.035.038	ST4,8X25MM	200	26760.048.025	ST6,3X45MM	100	26760.063.045
ST3,9X9,5MM	200	26760.039.009	ST4,8X32MM	100	26760.048.032	ST6,3X50MM	100	26760.063.050
ST3,9X13MM	200	26760.039.013	ST4,8X38MM	100	26760.048.038			
ST3,9X16MM	200	26760.039.016	ST4,8X45MM	100	26760.048.045			
ST3,9X19MM	200	26760.039.019	ST4,8X50MM	100	26760.048.050			


- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26300 Cross recessed pan head tapping screw Phillips without point		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Standard	
	ISO 7049 F-H DIN 7981 F-H ANSI B18.6.4	

d x L	✉	Art.number	d x L	✉	Art.number	d x L	✉	Art.number
ST2,2X4,5MM	2000	26300.022.004	ST2,9X19MM	2000	26300.029.019	ST4,2X9,5MM	1000	26300.042.009
ST2,2X6,5MM	2000	26300.022.006	ST3,5X6,5MM	2000	26300.035.006	ST4,2X13MM	1000	26300.042.013
ST2,9X4,5MM	2000	26300.029.004	ST3,5X8MM	2000	26300.035.008	ST4,2X16MM	1000	26300.042.016
ST2,9X6,5MM	2000	26300.029.006	ST3,5X9,5MM	2000	26300.035.009	ST4,2X19MM	500	26300.042.019
ST2,9X8MM	2000	26300.029.008	ST3,5X13MM	2000	26300.035.013	ST4,2X32MM	500	26300.042.032
ST2,9X9,5MM	2000	26300.029.009	ST3,5X16MM	1000	26300.035.016	ST4,8X13MM	1000	26300.048.013
ST2,9X13MM	2000	26300.029.013	ST3,5X19MM	1000	26300.035.019	ST4,8X19MM	500	26300.048.019
ST2,9X16MM	2000	26300.029.016						

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

Hexalobular socket pan head tapping screw



ISO ≈7049 C
 DIN ≈7981 C
 ANSI ≈B18.6.4
 NF ≈E25-654 C



Technical data

d	P	dk	k	Socket
ST2,9	1,1	5,6	2,2	No.8/No.10
ST3,5	1,3	6,9	2,6	No.10
ST3,9	1,4	7,5	2,8	No.15
ST4,2	1,4	8,2	3,05	No.20
ST4,8	1,6	9,5	3,55	No.25
ST5,5	1,8	10,8	3,95	No.25
ST6,3	1,8	12,5	4,55	No.30

26501 Hexalobular socket pan head tapping screw

J03A

Thread Self tapping thread
Material Steel
Surface treatment Zinc plated
Packaging Standard




6

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM	200	26501.029.009	ST4,2X13MM	200	26501.042.013	ST5,5X19MM	200	26501.055.019
ST2,9X13MM	200	26501.029.013	ST4,2X16MM	200	26501.042.016	ST5,5X25MM	100	26501.055.025
ST3,5X9,5MM	200	26501.035.009	ST4,2X19MM	200	26501.042.019	ST6,3X19MM	100	26501.063.019
ST3,5X13MM	200	26501.035.013	ST4,2X25MM	200	26501.042.025	ST6,3X25MM	100	26501.063.025
ST3,5X16MM	200	26501.035.016	ST4,8X13MM	200	26501.048.013	ST6,3X32MM	100	26501.063.032
ST3,5X19MM	200	26501.035.019	ST4,8X16MM	200	26501.048.016	ST6,3X45MM	100	26501.063.045
ST3,9X9,5MM	200	26501.039.009	ST4,8X19MM	200	26501.048.019			
ST3,9X13MM	200	26501.039.013						

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

Cross recessed countersunk head tapping screw

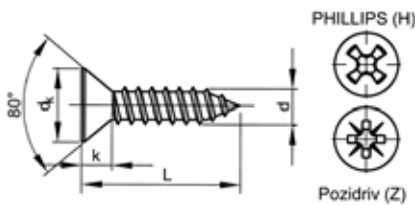
 ISO 7050 C
 DIN 7982 C


Technical data

d	P	dk	k ≈	No. cross recess
ST2,2	0,8	4,3	1,3	1
ST2,9	1,1	5,5	1,7	1
ST3,5	1,3	6,8	2,1	2
ST3,9	1,4	7,5	2,3	2
ST4,2	1,4	8,1	2,5	2
ST4,8	1,6	9,5	3	2
ST5,5	1,8	10,8	3,4	3
ST6,3	1,8	12,4	3,8	3

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	Phillips	St	Zipl	Standard	26680	6-77
ST	Phillips	St	Zipl	Large	26690	6-78
ST	Phillips	St	Ni.pl.	Standard	26220	6-78
ST	Phillips	St.St. A2		Standard	51680	6-78
ST	Phillips	St.St. A4		Standard	55680	6-79
ST	Pozidriv	St	Zipl	Standard	26770	6-79
ST	Pozidriv	St	Zipl blk p.	Standard	26432	6-80
ST	Pozidriv	St.St. A2		Standard	51681	6-80

6

26680 Cross recessed countersunk head tapping screw Phillips

J01B

Thread Self tapping thread
Material Steel
Surface treatment Zinc plated
Packaging Standard
 ISO 7050 C-H
 DIN 7982 C-H



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X6,5MM	200	26680.029.006	ST3,9X25MM	200	26680.039.025	ST5,5X13MM	200	26680.055.013
ST2,9X9,5MM	200	26680.029.009	ST3,9X32MM	200	26680.039.032	ST5,5X16MM	200	26680.055.016
ST2,9X13MM	200	26680.029.013				ST5,5X19MM	200	26680.055.019
ST2,9X16MM	200	26680.029.016	ST4,2X9,5MM	200	26680.042.009	ST5,5X22MM	100	26680.055.022
ST2,9X19MM	200	26680.029.019	ST4,2X13MM	200	26680.042.013	ST5,5X25MM	100	26680.055.025
ST2,9X22MM	200	26680.029.022	ST4,2X16MM	200	26680.042.016	ST5,5X32MM	100	26680.055.032
ST2,9X25MM	200	26680.029.025	ST4,2X19MM	200	26680.042.019	ST5,5X38MM	100	26680.055.038
			ST4,2X22MM	200	26680.042.022	ST5,5X45MM	100	26680.055.045
ST3,5X9,5MM	200	26680.035.009	ST4,2X25MM	200	26680.042.025	ST5,5X50MM	100	26680.055.050
ST3,5X13MM	200	26680.035.013	ST4,2X32MM	200	26680.042.032			
ST3,5X16MM	200	26680.035.016	ST4,2X38MM	200	26680.042.038	ST6,3X16MM	100	26680.063.016
ST3,5X19MM	200	26680.035.019	ST4,2X50MM	200	26680.042.050	ST6,3X19MM	100	26680.063.019
ST3,5X22MM	200	26680.035.022				ST6,3X22MM	100	26680.063.022
ST3,5X25MM	200	26680.035.025	ST4,8X13MM	200	26680.048.013	ST6,3X25MM	100	26680.063.025
ST3,5X32MM	200	26680.035.032	ST4,8X16MM	200	26680.048.016	ST6,3X32MM	100	26680.063.032
ST3,5X38MM	200	26680.035.038	ST4,8X19MM	200	26680.048.019	ST6,3X38MM	100	26680.063.038
			ST4,8X22MM	200	26680.048.022	ST6,3X45MM	100	26680.063.045
ST3,9X9,5MM	200	26680.039.009	ST4,8X25MM	200	26680.048.025	ST6,3X50MM	100	26680.063.050
ST3,9X13MM	200	26680.039.013	ST4,8X32MM	100	26680.048.032			
ST3,9X16MM	200	26680.039.016	ST4,8X38MM	100	26680.048.038			
ST3,9X19MM	200	26680.039.019	ST4,8X45MM	100	26680.048.045			
ST3,9X22MM	200	26680.039.022	ST4,8X50MM	100	26680.048.050			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26690 Cross recessed countersunk head tapping screw Phillips		J01B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated	
Packaging	Large	
	ISO 7050 C-H DIN 7982 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM	2000	26690.029.009	ST3,9X32MM	500	26690.039.032	ST4,8X19MM	1000	26690.048.019
ST2,9X13MM	2000	26690.029.013		1000	26690.042.013	ST4,8X25MM	1000	26690.048.025
ST3,5X9,5MM	2000	26690.035.009		1000	26690.042.016	ST4,8X32MM	500	26690.048.032
ST3,5X13MM	2000	26690.035.013		1000	26690.042.019	ST4,8X38MM	500	26690.048.038
ST3,5X16MM	2000	26690.035.016		1000	26690.042.025			
ST3,5X19MM	2000	26690.035.019	ST4,8X16MM	1000	26690.048.016			
ST3,5X25MM	2000	26690.035.025						

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26220 Cross recessed countersunk head tapping screw Phillips		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Standard	
	ISO 7050 C-H DIN 7982 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,5X13MM	200	26220.035.013	ST4,2X25MM	200	26220.042.025	ST5,5X25MM	100	26220.055.025
ST3,5X16MM	200	26220.035.016	ST4,2X32MM	200	26220.042.032	ST5,5X32MM	100	26220.055.032
ST3,5X19MM	200	26220.035.019	ST4,2X38MM	200	26220.042.038			
ST3,5X25MM	200	26220.035.025				ST6,3X25MM	100	26220.063.025
ST4,2X9,5MM	200	26220.042.009	ST4,8X16MM	200	26220.048.016	ST6,3X45MM	100	26220.063.045
ST4,2X13MM	200	26220.042.013	ST4,8X19MM	200	26220.048.019	ST6,3X50MM	100	26220.063.050
ST4,2X16MM	200	26220.042.016	ST4,8X25MM	200	26220.048.025	ST6,3X55MM	100	26220.063.055
ST4,2X19MM	200	26220.042.019	ST4,8X32MM	100	26220.048.032	ST6,3X60MM	100	26220.063.060

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

51680 Cross recessed countersunk head tapping screw Phillips		R01A
Thread	Self tapping thread	
Material	Stainless steel A2	
Packaging	Standard	
	ISO 7050 C-H	
	DIN 7982 C-H	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	51680.022.006	ST3,9X6,5MM *	1000	51680.039.006	ST4,8X16MM	200	51680.048.016
ST2,2X13MM *	1000	51680.022.013	ST3,9X9,5MM	200	51680.039.009	ST4,8X19MM	200	51680.048.019
ST2,2X16MM *	1000	51680.022.016	ST3,9X13MM	200	51680.039.013	ST4,8X22MM	200	51680.048.022
ST2,2X19MM *	1000	51680.022.019	ST3,9X16MM	200	51680.039.016	ST4,8X25MM	200	51680.048.025
ST2,2X22MM *	1000	51680.022.022	ST3,9X19MM	200	51680.039.019	ST4,8X32MM	200	51680.048.032
ST2,2X25MM *	1000	51680.022.025	ST3,9X22MM	200	51680.039.022	ST4,8X38MM	200	51680.048.038
ST2,9X6,5MM	200	51680.029.006	ST3,9X25MM	200	51680.039.025	ST4,8X45MM	200	51680.048.045
ST2,9X9,5MM	200	51680.029.009	ST3,9X32MM	200	51680.039.032	ST4,8X50MM	200	51680.048.050
ST2,9X13MM	200	51680.029.013	ST3,9X38MM	200	51680.039.038	ST4,8X55MM *	200	51680.048.055
ST2,9X16MM	200	51680.029.016	ST3,9X45MM *	500	51680.039.045	ST4,8X60MM	200	51680.048.060
ST2,9X19MM	200	51680.029.019	ST3,9X50MM *	500	51680.039.050	ST4,8X70MM	200	51680.048.070
ST2,9X22MM	200	51680.029.022	ST3,9X60MM *	500	51680.039.060	ST4,8X80MM	200	51680.048.080
ST2,9X25MM	200	51680.029.025	ST3,9X70MM *	500	51680.039.070	ST4,8X90MM *	200	51680.048.090
ST2,9X32MM *	1000	51680.029.032	ST4,2X9,5MM	200	51680.042.009	ST4,8X100MM	100	51680.048.100
ST3,5X6,5MM *	1000	51680.035.006	ST4,2X13MM	200	51680.042.013	ST4,8X120MM *	200	51680.048.120
ST3,5X9,5MM	200	51680.035.009	ST4,2X16MM	200	51680.042.016	ST5,5X13MM	200	51680.055.013
ST3,5X13MM	200	51680.035.013	ST4,2X19MM	200	51680.042.019	ST5,5X16MM	200	51680.055.016
ST3,5X16MM	200	51680.035.016	ST4,2X22MM	200	51680.042.022	ST5,5X19MM	200	51680.055.019
ST3,5X19MM	200	51680.035.019	ST4,2X25MM	200	51680.042.025	ST5,5X22MM	200	51680.055.022
ST3,5X22MM	200	51680.035.022	ST4,2X32MM	200	51680.042.032	ST5,5X25MM	200	51680.055.025
ST3,5X25MM	200	51680.035.025	ST4,2X38MM	200	51680.042.038	ST5,5X32MM	100	51680.055.032
ST3,5X32MM	200	51680.035.032	ST4,2X45MM	200	51680.042.045	ST5,5X38MM	100	51680.055.038
ST3,5X38MM	200	51680.035.038	ST4,2X50MM	200	51680.042.050	ST5,5X45MM	100	51680.055.045
ST3,5X45MM *	500	51680.035.045	ST4,2X60MM	200	51680.042.060	ST5,5X50MM	100	51680.055.050
ST3,5X50MM *	500	51680.035.050	ST4,2X70MM *	200	51680.042.070	ST5,5X70MM *	200	51680.055.070
ST3,5X60MM *	500	51680.035.060	ST4,2X80MM *	200	51680.042.080	ST5,5X80MM *	200	51680.055.080
ST3,5X70MM *	500	51680.035.070	ST4,8X9,5MM	200	51680.048.009	ST5,5X90MM *	200	51680.055.090
			ST4,8X13MM	200	51680.048.013	ST5,5X120MM *	200	51680.055.120

51680 Cross recessed countersunk head tapping screw Phillips

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST6,3X16MM	100	51680.063.016	ST6,3X38MM	100	51680.063.038	ST6,3X80MM *	200	51680.063.080
ST6,3X19MM	100	51680.063.019	ST6,3X45MM	100	51680.063.045	ST6,3X90MM *	200	51680.063.090
ST6,3X22MM	100	51680.063.022	ST6,3X50MM	100	51680.063.050	ST6,3X100MM *	200	51680.063.100
ST6,3X25MM	100	51680.063.025	ST6,3X60MM *	200	51680.063.060			
ST6,3X32MM	100	51680.063.032	ST6,3X70MM *	200	51680.063.070			

55680 Cross recessed countersunk head tapping screw Phillips
R41A

Thread Self tapping thread
Material Stainless steel A4
Packaging Standard
 ISO 7050 C-H
 DIN 7982 C-H



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	55680.022.006	ST3,9X45MM *	500	55680.039.045	ST4,8X100MM *	200	55680.048.100
ST2,2X9,5MM *	1000	55680.022.009	ST3,9X50MM *	500	55680.039.050			
ST2,9X6,5MM *	1000	55680.029.006	ST4,2X9,5MM *	1000	55680.042.009	ST5,5X13MM *	1000	55680.055.013
ST2,9X9,5MM	200	55680.029.009	ST4,2X13MM	200	55680.042.013	ST5,5X16MM	200	55680.055.016
ST2,9X13MM	200	55680.029.013	ST4,2X16MM	200	55680.042.016	ST5,5X19MM	200	55680.055.019
ST2,9X16MM	200	55680.029.016	ST4,2X19MM	200	55680.042.019	ST5,5X22MM	200	55680.055.022
ST2,9X19MM	200	55680.029.019	ST4,2X22MM	200	55680.042.022	ST5,5X25MM	200	55680.055.025
ST2,9X22MM *	1000	55680.029.022	ST4,2X25MM	200	55680.042.025	ST5,5X32MM	100	55680.055.032
ST2,9X32MM *	1000	55680.029.032	ST4,2X25MM	200	55680.042.032	ST5,5X38MM	100	55680.055.038
			ST4,2X32MM	200	55680.042.032	ST5,5X45MM	100	55680.055.045
			ST4,2X38MM	200	55680.042.038	ST5,5X50MM	100	55680.055.050
ST3,5X6,5MM *	1000	55680.035.006	ST4,2X45MM *	500	55680.042.045	ST5,5X60MM *	200	55680.055.060
ST3,5X9,5MM	200	55680.035.009	ST4,2X50MM *	200	55680.042.050	ST5,5X70MM *	200	55680.055.070
ST3,5X13MM	200	55680.035.013	ST4,2X60MM *	200	55680.042.060	ST5,5X100MM *	200	55680.055.100
ST3,5X16MM	200	55680.035.016	ST4,2X70MM *	200	55680.042.070			
ST3,5X19MM	200	55680.035.019				ST6,3X13MM *	500	55680.063.013
ST3,5X22MM	200	55680.035.022	ST4,8X9,5MM *	1000	55680.048.009	ST6,3X16MM	100	55680.063.016
ST3,5X25MM	200	55680.035.025	ST4,8X13MM *	1000	55680.048.013	ST6,3X19MM	100	55680.063.019
ST3,5X32MM	200	55680.035.032	ST4,8X16MM	200	55680.048.016	ST6,3X22MM	100	55680.063.022
ST3,5X38MM *	1000	55680.035.038	ST4,8X19MM	200	55680.048.019	ST6,3X25MM	100	55680.063.025
			ST4,8X22MM	200	55680.048.022	ST6,3X32MM	100	55680.063.032
ST3,9X9,5MM *	1000	55680.039.009	ST4,8X25MM	200	55680.048.025	ST6,3X38MM	100	55680.063.038
ST3,9X13MM	200	55680.039.013	ST4,8X32MM	200	55680.048.032	ST6,3X45MM	100	55680.063.045
ST3,9X16MM	200	55680.039.016	ST4,8X38MM	200	55680.048.038	ST6,3X50MM	100	55680.063.050
ST3,9X19MM	200	55680.039.019	ST4,8X45MM *	200	55680.048.045	ST6,3X60MM *	200	55680.063.060
ST3,9X22MM	200	55680.039.022	ST4,8X50MM *	200	55680.048.050	ST6,3X70MM *	200	55680.063.070
ST3,9X25MM	200	55680.039.025	ST4,8X60MM *	200	55680.048.060	ST6,3X80MM *	200	55680.063.080
ST3,9X32MM *	1000	55680.039.032	ST4,8X70MM *	200	55680.048.070			
ST3,9X38MM *	500	55680.039.038	ST4,8X80MM *	200	55680.048.080			

6
26770 Cross recessed countersunk head tapping screw Pozidriv
J01A

Thread Self tapping thread
Material Steel
Surface treatment Zinc plated
Packaging Standard
 ISO 7050 C-Z
 DIN 7982 C-Z
 NF E25-656 C




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM	200	26770.029.009	ST4,2X9,5MM	200	26770.042.009	ST5,5X16MM	200	26770.055.016
ST2,9X13MM	200	26770.029.013	ST4,2X13MM	200	26770.042.013	ST5,5X19MM	200	26770.055.019
ST2,9X16MM	200	26770.029.016	ST4,2X16MM	200	26770.042.016	ST5,5X25MM	100	26770.055.025
ST2,9X19MM	200	26770.029.019	ST4,2X19MM	200	26770.042.019	ST5,5X32MM	100	26770.055.032
ST2,9X25MM	200	26770.029.025	ST4,2X25MM	200	26770.042.025	ST5,5X38MM	100	26770.055.038
			ST4,2X25MM	200	26770.042.025	ST5,5X45MM	100	26770.055.045
ST3,5X9,5MM	200	26770.035.009	ST4,2X32MM	200	26770.042.032	ST5,5X50MM	100	26770.055.050
ST3,5X13MM	200	26770.035.013	ST4,2X38MM	200	26770.042.038			
ST3,5X16MM	200	26770.035.016	ST4,2X45MM	200	26770.042.045	ST6,3X16MM	100	26770.063.016
ST3,5X19MM	200	26770.035.019				ST6,3X19MM	100	26770.063.019
ST3,5X25MM	200	26770.035.025	ST4,8X13MM	200	26770.048.013	ST6,3X25MM	100	26770.063.025
ST3,5X32MM	200	26770.035.032	ST4,8X16MM	200	26770.048.016	ST6,3X32MM	100	26770.063.032
ST3,5X38MM	200	26770.035.038	ST4,8X19MM	200	26770.048.019	ST6,3X38MM	100	26770.063.038
			ST4,8X25MM	200	26770.048.025	ST6,3X45MM	100	26770.063.045
ST3,9X9,5MM	200	26770.039.009	ST4,8X32MM	100	26770.048.032	ST6,3X50MM	100	26770.063.050
ST3,9X13MM	200	26770.039.013	ST4,8X38MM	100	26770.048.038	ST6,3X60MM	100	26770.063.060
ST3,9X16MM	200	26770.039.016	ST4,8X45MM	100	26770.048.045			
ST3,9X19MM	200	26770.039.019	ST4,8X50MM	100	26770.048.050			
ST3,9X25MM	200	26770.039.025						
ST3,9X32MM	200	26770.039.032	ST5,5X13MM	200	26770.055.013			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

26432 Cross recessed countersunk head tapping screw Pozidriv		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated black passivated	
Packaging	Standard	
	ISO 7050 C-Z DIN 7982 C-Z NF E25-656 C	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X13MM	200	26432.029.013	ST3,5X19MM	200	26432.035.019	ST4,2X19MM	200	26432.042.019
ST3,5X9,5MM	200	26432.035.009						
ST3,5X16MM	200	26432.035.016	ST4,2X16MM	200	26432.042.016			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.


51681 Cross recessed countersunk head tapping screw Pozidriv		R01A
Thread	Self tapping thread	
Material	Stainless steel A2	
Packaging	Standard	
	ISO 7050 C-Z DIN 7982 C-Z NF E25-656 C	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X9,5MM *	1000	51681.022.009	ST3,9X32MM	200	51681.039.032	ST4,8X100MM *	200	51681.048.100
ST2,2X25MM *	1000	51681.022.025	ST3,9X38MM *	100	51681.039.038			
			ST3,9X45MM *	500	51681.039.045	ST5,5X13MM *	1000	51681.055.013
ST2,9X9,5MM	200	51681.029.009	ST3,9X50MM *	500	51681.039.050	ST5,5X16MM *	1000	51681.055.016
ST2,9X13MM	200	51681.029.013				ST5,5X19MM	200	51681.055.019
ST2,9X16MM	200	51681.029.016	ST4,2X13MM	200	51681.042.013	ST5,5X22MM *	1000	51681.055.022
ST2,9X19MM	200	51681.029.019	ST4,2X16MM	200	51681.042.016	ST5,5X32MM	100	51681.055.032
ST2,9X22MM *	1000	51681.029.022	ST4,2X19MM	200	51681.042.019	ST5,5X38MM	100	51681.055.038
ST2,9X25MM	200	51681.029.025	ST4,2X22MM *	1000	51681.042.022	ST5,5X45MM	100	51681.055.045
ST2,9X32MM *	1000	51681.029.032	ST4,2X25MM	200	51681.042.025	ST5,5X50MM	100	51681.055.050
			ST4,2X32MM	200	51681.042.032	ST5,5X70MM *	200	51681.055.070
ST3,5X6,5MM *	1000	51681.035.006	ST4,2X38MM	200	51681.042.038	ST5,5X100MM *	200	51681.055.100
ST3,5X9,5MM	200	51681.035.009	ST4,2X45MM	200	51681.042.045			
ST3,5X13MM	200	51681.035.013	ST4,2X50MM	200	51681.042.050	ST6,3X16MM *	500	51681.063.016
ST3,5X16MM	200	51681.035.016	ST4,2X60MM *	200	51681.042.060	ST6,3X19MM *	500	51681.063.019
ST3,5X19MM	200	51681.035.019	ST4,2X70MM *	200	51681.042.070	ST6,3X22MM *	500	51681.063.022
ST3,5X22MM *	1000	51681.035.022				ST6,3X25MM	100	51681.063.025
ST3,5X25MM	200	51681.035.025	ST4,8X16MM	200	51681.048.016	ST6,3X32MM	100	51681.063.032
ST3,5X32MM	200	51681.035.032	ST4,8X19MM	200	51681.048.019	ST6,3X38MM	100	51681.063.038
ST3,5X38MM	200	51681.035.038	ST4,8X22MM *	1000	51681.048.022	ST6,3X45MM	100	51681.063.045
			ST4,8X25MM	200	51681.048.025	ST6,3X50MM	100	51681.063.050
ST3,9X13MM	200	51681.039.013	ST4,8X32MM	200	51681.048.032	ST6,3X60MM *	200	51681.063.060
ST3,9X16MM	200	51681.039.016	ST4,8X38MM	200	51681.048.038	ST6,3X70MM *	200	51681.063.070
ST3,9X19MM	200	51681.039.019	ST4,8X45MM	200	51681.048.045	ST6,3X80MM *	200	51681.063.080
ST3,9X22MM *	1000	51681.039.022	ST4,8X50MM	200	51681.048.050			
ST3,9X25MM	200	51681.039.025	ST4,8X90MM *	200	51681.048.090			

6

Hexalobular socket countersunk head tapping screw

ISO 14586 C

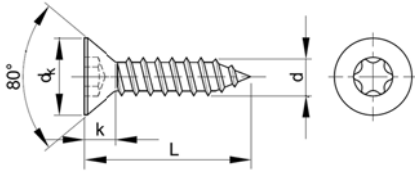

Technical data

d	P	dk	k ≈	Socket
ST2,9	1,1	5,5	1,7	No.10
ST3,5	1,3	7,3	2,35	No.15
ST3,9 (#ISO)	1,3	7,5	2,3	No.20
ST4,2	1,4	8,4	2,6	No.20
ST4,8	1,6	9,3	2,8	No.25
ST5,5	1,8	10,3	3	No.25
ST6,3	1,8	11,3	3,15	No.30

26521 Hexalobular socket countersunk head tapping screw

J03A


Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM	200	26521.029.009	ST3,9X19MM	500	26521.039.019	ST4,8X16MM	500	26521.048.016
ST2,9X13MM	200	26521.029.013	ST3,9X22MM	500	26521.039.022	ST4,8X19MM	200	26521.048.019
ST2,9X16MM	500	26521.029.016	ST3,9X25MM	500	26521.039.025	ST4,8X22MM	500	26521.048.022
ST2,9X19MM	500	26521.029.019	ST3,9X32MM	500	26521.039.032	ST4,8X25MM	200	26521.048.025
			ST3,9X38MM	200	26521.039.038	ST4,8X32MM	200	26521.048.032
ST3,5X9,5MM	1000	26521.035.009	ST4,2X9,5MM	500	26521.042.009	ST4,8X38MM	200	26521.048.038
ST3,5X13MM	1000	26521.035.013	ST4,2X13MM	500	26521.042.013	ST4,8X45MM	200	26521.048.045
ST3,5X16MM	200	26521.035.016	ST4,2X16MM	500	26521.042.016	ST4,8X50MM	100	26521.048.050
ST3,5X19MM	200	26521.035.019	ST4,2X19MM	200	26521.042.019			
ST3,5X22MM	500	26521.035.022	ST4,2X22MM	500	26521.042.022	ST5,5X45MM	100	26521.055.045
ST3,5X25MM	500	26521.035.025	ST4,2X25MM	500	26521.042.025	ST6,3X45MM	100	26521.063.045
ST3,5X32MM	200	26521.035.032	ST4,2X32MM	200	26521.042.032	ST6,3X50MM	100	26521.063.050
ST3,5X38MM	200	26521.035.038	ST4,2X38MM	200	26521.042.038			
ST3,9X9,5MM	200	26521.039.009	ST4,2X45MM	200	26521.042.045			
ST3,9X16MM	500	26521.039.016	ST4,2X50MM	200	26521.042.050			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

Cross recessed raised countersunk head tapping screw

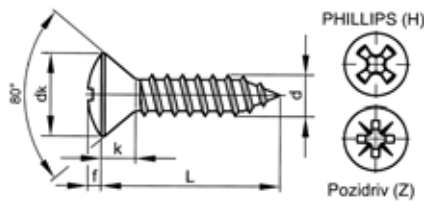

ISO 7051 C
DIN 7983 C



Technical data

d	P	dk	k ≈	f ≈	No. cross recess
ST2,2	0,8	4,3	1,3	0,7	1
ST2,9	1,1	5,5	1,7	0,9	1
ST3,5	1,3	6,8	2,1	1,2	2
ST3,9	1,4	7,5	2,3	1,3	2
ST4,2	1,4	8,1	2,5	1,4	2
ST4,8	1,6	9,5	3	1,5	2
ST5,5	1,8	10,8	3,4	1,7	3
ST6,3	1,8	12,4	3,8	2	3

Article groups

Thread	Driving features	Material	Surface treatment	Packaging	Code	Page
ST	Phillips	St	Zipl	Standard	26700	6-82
ST	Phillips	St	Ni.pl.	Standard	26240	6-83
ST	Phillips	St	Zipl blk p.	Standard	26450	6-83
ST	Phillips	St.St. A2		Standard	51690	6-83
ST	Phillips	St.St. A4		Standard	55690	6-84
ST	Pozidriv	St	Zipl	Standard	26780	6-84
ST	Pozidriv	St	Zipl blk p.	Standard	26452	6-85
ST	Pozidriv	St.St. A2		Standard	51689	6-85

6

26700 Cross recessed raised countersunk head tapping screw Phillips

J01B

Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated
Packaging	Standard
	ISO 7051 C-H
	DIN 7983 C-H



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM	200	26700.029.009	ST3,9X22MM	200	26700.039.022	ST5,5X13MM	200	26700.055.013
ST2,9X13MM	200	26700.029.013	ST3,9X25MM	200	26700.039.025	ST5,5X16MM	200	26700.055.016
ST2,9X16MM	200	26700.029.016	ST4,2X13MM	200	26700.042.013	ST5,5X19MM	200	26700.055.019
ST2,9X19MM	200	26700.029.019	ST4,2X16MM	200	26700.042.016	ST5,5X25MM	100	26700.055.025
ST2,9X22MM	200	26700.029.022	ST4,2X19MM	200	26700.042.019	ST5,5X32MM	100	26700.055.032
ST2,9X25MM	200	26700.029.025	ST4,2X22MM	200	26700.042.022	ST5,5X38MM	100	26700.055.038
ST3,5X9,5MM	200	26700.035.009	ST4,2X25MM	200	26700.042.025	ST5,5X45MM	100	26700.055.045
ST3,5X13MM	200	26700.035.013	ST4,2X32MM	200	26700.042.032	ST5,5X50MM	100	26700.055.050
ST3,5X16MM	200	26700.035.016	ST4,2X38MM	200	26700.042.038			
ST3,5X19MM	200	26700.035.019	ST4,8X13MM	200	26700.048.013	ST6,3X16MM	100	26700.063.016
ST3,5X22MM	200	26700.035.022	ST4,8X16MM	200	26700.048.016	ST6,3X19MM	100	26700.063.019
ST3,5X25MM	200	26700.035.025	ST4,8X19MM	200	26700.048.019	ST6,3X22MM	100	26700.063.022
ST3,5X32MM	200	26700.035.032	ST4,8X22MM	200	26700.048.022	ST6,3X25MM	100	26700.063.025
ST3,5X38MM	200	26700.035.038	ST4,8X25MM	200	26700.048.025	ST6,3X32MM	100	26700.063.032
ST3,9X9,5MM	200	26700.039.009	ST4,8X32MM	100	26700.048.032	ST6,3X38MM	100	26700.063.038
ST3,9X13MM	200	26700.039.013	ST4,8X38MM	100	26700.048.038	ST6,3X45MM	100	26700.063.045
ST3,9X16MM	200	26700.039.016	ST4,8X45MM	100	26700.048.045	ST6,3X50MM	100	26700.063.050
ST3,9X19MM	200	26700.039.019	ST4,8X50MM	100	26700.048.050			

- Warning: electro-galvanizing of these products may cause hydrogen embrittlement.


26240 Cross recessed raised countersunk head tapping screw Phillips		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Nickel plated	
Packaging	Standard ISO 7051 C-H DIN 7983 C-H	



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X13MM	200	26240.029.013	ST4,2X19MM	200	26240.042.019	ST4,8X38MM	100	26240.048.038
ST2,9X19MM	200	26240.029.019	ST4,2X25MM	200	26240.042.025	ST4,8X50MM	100	26240.048.050
			ST4,2X32MM	200	26240.042.032			
ST3,5X13MM	200	26240.035.013	ST4,2X38MM	200	26240.042.038	ST5,5X19MM	200	26240.055.019
ST3,5X16MM	200	26240.035.016	ST4,2X45MM	200	26240.042.045	ST5,5X25MM	100	26240.055.025
ST3,5X19MM	200	26240.035.019				ST5,5X32MM	100	26240.055.032
ST3,5X25MM	200	26240.035.025	ST4,8X13MM	200	26240.048.013	ST5,5X38MM	100	26240.055.038
ST3,5X32MM	200	26240.035.032	ST4,8X16MM	200	26240.048.016			
			ST4,8X19MM	200	26240.048.019	ST6,3X25MM	100	26240.063.025
ST4,2X13MM	200	26240.042.013	ST4,8X25MM	200	26240.048.025	ST6,3X38MM	100	26240.063.038
ST4,2X16MM	200	26240.042.016	ST4,8X32MM	100	26240.048.032			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.


26450 Cross recessed raised countersunk head tapping screw Phillips		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated black passivated	
Packaging	Standard ISO 7051 C-H DIN 7983 C-H	



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X9,5MM	200	26450.029.009	ST3,9X13MM	200	26450.039.013	ST4,8X25MM	200	26450.048.025
ST2,9X13MM	200	26450.029.013	ST3,9X16MM	200	26450.039.016	ST4,8X32MM	100	26450.048.032
ST2,9X16MM	200	26450.029.016	ST3,9X19MM	200	26450.039.019	ST4,8X38MM	100	26450.048.038
ST2,9X19MM	200	26450.029.019	ST3,9X25MM	200	26450.039.025	ST4,8X45MM	100	26450.048.045
ST2,9X25MM	200	26450.029.025				ST4,8X50MM	100	26450.048.050
			ST4,2X13MM	200	26450.042.013			
ST3,5X9,5MM	200	26450.035.009	ST4,2X16MM	200	26450.042.016	ST5,5X16MM	200	26450.055.016
ST3,5X13MM	200	26450.035.013	ST4,2X19MM	200	26450.042.019	ST5,5X19MM	200	26450.055.019
ST3,5X16MM	200	26450.035.016	ST4,2X25MM	200	26450.042.025	ST5,5X25MM	100	26450.055.025
ST3,5X19MM	200	26450.035.019	ST4,2X32MM	200	26450.042.032	ST5,5X32MM	100	26450.055.032
ST3,5X25MM	200	26450.035.025	ST4,2X38MM	200	26450.042.038	ST5,5X38MM	100	26450.055.038
ST3,5X32MM	200	26450.035.032				ST5,5X50MM	100	26450.055.050
ST3,5X38MM	200	26450.035.038	ST4,8X13MM	200	26450.048.013			
			ST4,8X16MM	200	26450.048.016			
ST3,9X9,5MM	200	26450.039.009	ST4,8X19MM	200	26450.048.019			

• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

51690 Cross recessed raised countersunk head tapping screw Phillips		R01A
Thread	Self tapping thread	
Material	Stainless steel A2	
Packaging	Standard ISO 7051 C-H DIN 7983 C-H	



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X6,5MM *	1000	51690.022.006	ST3,5X32MM	200	51690.035.032	ST4,2X13MM	200	51690.042.013
ST2,2X9,5MM *	1000	51690.022.009	ST3,5X38MM	200	51690.035.038	ST4,2X16MM	200	51690.042.016
ST2,2X13MM *	1000	51690.022.013	ST3,5X45MM *	500	51690.035.045	ST4,2X19MM	200	51690.042.019
ST2,2X16MM *	1000	51690.022.016	ST3,5X50MM *	500	51690.035.050	ST4,2X22MM	200	51690.042.022
ST2,2X19MM *	1000	51690.022.019	ST3,5X60MM *	500	51690.035.060	ST4,2X25MM	200	51690.042.025
ST2,2X25MM *	1000	51690.022.025	ST3,5X70MM *	500	51690.035.070	ST4,2X32MM	200	51690.042.032
						ST4,2X38MM	200	51690.042.038
ST2,9X6,5MM	200	51690.029.006	ST3,9X6,5MM *	1000	51690.039.006	ST4,2X45MM	200	51690.042.045
ST2,9X9,5MM	200	51690.029.009	ST3,9X9,5MM	200	51690.039.009	ST4,2X50MM	200	51690.042.050
ST2,9X13MM	200	51690.029.013	ST3,9X13MM	200	51690.039.013	ST4,2X60MM	200	51690.042.060
ST2,9X16MM	200	51690.029.016	ST3,9X16MM	200	51690.039.016	ST4,2X70MM *	200	51690.042.070
ST2,9X19MM	200	51690.029.019	ST3,9X19MM	200	51690.039.019			
ST2,9X22MM	200	51690.029.022	ST3,9X22MM	200	51690.039.022	ST4,8X9,5MM	200	51690.048.009
ST2,9X25MM	200	51690.029.025	ST3,9X25MM	200	51690.039.025	ST4,8X13MM	200	51690.048.013
ST2,9X32MM *	1000	51690.029.032	ST3,9X32MM	200	51690.039.032	ST4,8X16MM	200	51690.048.016
			ST3,9X38MM	200	51690.039.038	ST4,8X19MM	200	51690.048.019
ST3,5X9,5MM	200	51690.035.009	ST3,9X45MM *	500	51690.039.045	ST4,8X22MM	200	51690.048.022
ST3,5X13MM	200	51690.035.013	ST3,9X50MM *	500	51690.039.050	ST4,8X25MM	200	51690.048.025
ST3,5X16MM	200	51690.035.016	ST3,9X60MM *	500	51690.039.060	ST4,8X32MM	200	51690.048.032
ST3,5X19MM	200	51690.035.019	ST3,9X70MM *	500	51690.039.070	ST4,8X38MM	200	51690.048.038
ST3,5X22MM	200	51690.035.022				ST4,8X45MM	200	51690.048.045
ST3,5X25MM	200	51690.035.025	ST4,2X9,5MM	200	51690.042.009	ST4,8X50MM	200	51690.048.050

51690 Cross recessed raised countersunk head tapping screw Phillips

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST4,8X60MM	200	51690.048.060	ST5,5X32MM	100	51690.055.032	ST6,3X22MM	100	51690.063.022
ST4,8X70MM	200	51690.048.070	ST5,5X38MM	100	51690.055.038	ST6,3X25MM	100	51690.063.025
ST4,8X80MM	200	51690.048.080	ST5,5X45MM	100	51690.055.045	ST6,3X32MM	100	51690.063.032
ST4,8X90MM *	200	51690.048.090	ST5,5X50MM	100	51690.055.050	ST6,3X38MM	100	51690.063.038
ST4,8X100MM	100	51690.048.100	ST5,5X60MM *	200	51690.055.060	ST6,3X45MM	100	51690.063.045
ST4,8X110MM *	200	51690.048.110	ST5,5X70MM *	200	51690.055.070	ST6,3X50MM	100	51690.063.050
ST5,5X13MM	200	51690.055.013	ST5,5X80MM *	200	51690.055.080	ST6,3X60MM *	200	51690.063.060
ST5,5X16MM	200	51690.055.016	ST5,5X90MM *	200	51690.055.090	ST6,3X70MM *	200	51690.063.070
ST5,5X19MM	200	51690.055.019	ST6,3X13MM *	500	51690.063.013	ST6,3X80MM *	200	51690.063.080
ST5,5X22MM	200	51690.055.022	ST6,3X16MM	100	51690.063.016	ST6,3X90MM *	200	51690.063.090
ST5,5X25MM	200	51690.055.025	ST6,3X19MM	100	51690.063.019	ST6,3X100MM *	200	51690.063.100

55690 Cross recessed raised countersunk head tapping screw Phillips
R41A

Thread Self tapping thread
Material Stainless steel A4
Packaging Standard
 ISO 7051 C-H
 DIN 7983 C-H



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X9,5MM *	1000	55690.022.009	ST3,9X32MM *	1000	55690.039.032	ST4,8X38MM	200	55690.048.038
ST2,2X9,5MM	200	55690.029.009	ST3,9X38MM *	500	55690.039.038	ST4,8X45MM *	200	55690.048.045
ST2,2X13MM	200	55690.029.013	ST3,9X45MM *	500	55690.039.045	ST4,8X50MM *	200	55690.048.050
ST2,2X16MM	200	55690.029.016	ST3,9X50MM *	500	55690.039.050	ST4,8X60MM *	200	55690.048.060
ST2,2X19MM	200	55690.029.019				ST4,8X70MM *	200	55690.048.070
ST2,2X22MM *	1000	55690.029.022	ST4,2X9,5MM *	1000	55690.042.009	ST5,5X13MM *	1000	55690.055.013
ST2,2X25MM *	1000	55690.029.025	ST4,2X13MM	200	55690.042.013	ST5,5X16MM *	1000	55690.055.016
ST2,2X32MM *	1000	55690.029.032	ST4,2X16MM	200	55690.042.016	ST5,5X19MM	200	55690.055.019
			ST4,2X19MM	200	55690.042.019	ST5,5X22MM *	1000	55690.055.022
ST3,5X9,5MM	200	55690.035.009	ST4,2X22MM	200	55690.042.022	ST5,5X25MM	200	55690.055.025
ST3,5X13MM	200	55690.035.013	ST4,2X25MM	200	55690.042.025	ST5,5X32MM *	500	55690.055.032
ST3,5X16MM	200	55690.035.016	ST4,2X32MM	200	55690.042.032	ST5,5X38MM	100	55690.055.038
ST3,5X19MM	200	55690.035.019	ST4,2X38MM	200	55690.042.038	ST5,5X45MM	100	55690.055.045
ST3,5X22MM *	1000	55690.035.022	ST4,2X45MM *	500	55690.042.045	ST5,5X50MM	100	55690.055.050
ST3,5X25MM *	1000	55690.035.025	ST4,2X50MM *	200	55690.042.050			
ST3,5X32MM *	1000	55690.035.032	ST4,2X60MM *	200	55690.042.060	ST6,3X25MM *	200	55690.063.025
ST3,5X38MM *	1000	55690.035.038	ST4,2X70MM *	200	55690.042.070	ST6,3X32MM *	200	55690.063.032
						ST6,3X38MM *	200	55690.063.038
ST3,9X9,5MM *	1000	55690.039.009	ST4,8X13MM *	1000	55690.048.013	ST6,3X50MM *	200	55690.063.050
ST3,9X13MM	200	55690.039.013	ST4,8X16MM	200	55690.048.016	ST6,3X60MM *	200	55690.063.060
ST3,9X16MM	200	55690.039.016	ST4,8X19MM	200	55690.048.019	ST6,3X80MM *	200	55690.063.080
ST3,9X19MM	200	55690.039.019	ST4,8X22MM	200	55690.048.022			
ST3,9X22MM	200	55690.039.022	ST4,8X25MM	200	55690.048.025			
ST3,9X25MM	200	55690.039.025	ST4,8X32MM	200	55690.048.032			

26780 Cross recessed raised countersunk head tapping screw Pozidriv
J01A

Thread Self tapping thread
Material Steel
Surface treatment Zinc plated
Packaging Standard
 ISO 7051 C-Z
 DIN 7983 C-Z
 NF E25-657 C




d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X9,5MM	200	26780.029.009	ST3,9X32MM	200	26780.039.032	ST5,5X13MM	200	26780.055.013
ST2,2X13MM	200	26780.029.013				ST5,5X16MM	200	26780.055.016
ST2,2X16MM	200	26780.029.016	ST4,2X13MM	200	26780.042.013	ST5,5X19MM	200	26780.055.019
ST2,2X19MM	200	26780.029.019	ST4,2X16MM	200	26780.042.016	ST5,5X25MM	100	26780.055.025
ST2,2X25MM	200	26780.029.025	ST4,2X19MM	200	26780.042.019	ST5,5X32MM	100	26780.055.032
			ST4,2X25MM	200	26780.042.025	ST5,5X38MM	100	26780.055.038
ST3,5X9,5MM	200	26780.035.009	ST4,2X32MM	200	26780.042.032	ST5,5X45MM	100	26780.055.045
ST3,5X13MM	200	26780.035.013	ST4,2X38MM	200	26780.042.038	ST5,5X50MM	100	26780.055.050
ST3,5X16MM	200	26780.035.016	ST4,2X45MM	200	26780.042.045			
ST3,5X19MM	200	26780.035.019				ST6,3X16MM	100	26780.063.016
ST3,5X25MM	200	26780.035.025	ST4,8X13MM	200	26780.048.013	ST6,3X19MM	100	26780.063.019
ST3,5X32MM	200	26780.035.032	ST4,8X16MM	200	26780.048.016	ST6,3X22MM	100	26780.063.022
ST3,5X38MM	200	26780.035.038	ST4,8X19MM	200	26780.048.019	ST6,3X25MM	100	26780.063.025
			ST4,8X25MM	200	26780.048.025	ST6,3X32MM	100	26780.063.032
ST3,9X9,5MM	200	26780.039.009	ST4,8X32MM	100	26780.048.032	ST6,3X38MM	100	26780.063.038
ST3,9X13MM	200	26780.039.013	ST4,8X38MM	100	26780.048.038	ST6,3X45MM	100	26780.063.045
ST3,9X16MM	200	26780.039.016	ST4,8X45MM	100	26780.048.045	ST6,3X50MM	100	26780.063.050
ST3,9X19MM	200	26780.039.019	ST4,8X50MM	100	26780.048.050			
ST3,9X25MM	200	26780.039.025						

26452 Cross recessed raised countersunk head tapping screw Pozidriv		J03B
Thread	Self tapping thread	
Material	Steel	
Surface treatment	Zinc plated black passivated	
Packaging	Standard	
	ISO 7051 C-Z DIN 7983 C-Z NF E25-657 C	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,9X13MM	200	26452.029.013	ST3,9X19MM	200	26452.039.019	ST4,8X16MM	200	26452.048.016
ST2,9X19MM	200	26452.029.019	ST4,2X13MM	200	26452.042.013	ST4,8X19MM	200	26452.048.019
ST3,5X13MM	200	26452.035.013	ST4,2X16MM	200	26452.042.016	ST4,8X25MM	200	26452.048.025
ST3,5X16MM	200	26452.035.016	ST4,2X19MM	200	26452.042.019	ST4,8X32MM	100	26452.048.032
ST3,5X19MM	200	26452.035.019	ST4,2X25MM	200	26452.042.025	ST4,8X38MM	100	26452.048.038
ST3,5X25MM	200	26452.035.025	ST4,2X32MM	200	26452.042.032			
ST3,5X32MM	200	26452.035.032	ST4,2X38MM	200	26452.042.038			



• Warning: electro-galvanizing of these products may cause hydrogen embrittlement.

51689 Cross recessed raised countersunk head tapping screw Pozidriv		R01A
Thread	Self tapping thread	
Material	Stainless steel A2	
Packaging	Standard	
	ISO 7051 C-Z DIN 7983 C-Z NF E25-657 C	

d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST2,2X9,5MM *	1000	51689.022.009	ST4,2X9,5MM *	1000	51689.042.009	ST4,8X80MM *	200	51689.048.080
ST2,9X9,5MM	200	51689.029.009	ST4,2X13MM	200	51689.042.013	ST4,8X100MM *	200	51689.048.100
ST2,9X13MM	200	51689.029.013	ST4,2X16MM	200	51689.042.016	ST5,5X13MM *	1000	51689.055.013
ST2,9X16MM	200	51689.029.016	ST4,2X19MM	200	51689.042.019	ST5,5X16MM *	1000	51689.055.016
ST2,9X19MM	200	51689.029.019	ST4,2X22MM *	1000	51689.042.022	ST5,5X19MM *	1000	51689.055.019
ST2,9X25MM	200	51689.029.025	ST4,2X25MM	200	51689.042.025	ST5,5X22MM *	1000	51689.055.022
ST2,9X32MM *	1000	51689.029.032	ST4,2X32MM	200	51689.042.032	ST5,5X25MM	200	51689.055.025
ST3,5X6,5MM *	1000	51689.035.006	ST4,2X38MM	200	51689.042.038	ST5,5X32MM	100	51689.055.032
ST3,5X13MM	200	51689.035.013	ST4,2X45MM	200	51689.042.045	ST5,5X38MM	100	51689.055.038
ST3,5X16MM	200	51689.035.016	ST4,2X50MM	200	51689.042.050	ST5,5X45MM	100	51689.055.045
ST3,5X19MM	200	51689.035.019	ST4,2X70MM *	200	51689.042.070	ST5,5X50MM	100	51689.055.050
ST3,5X22MM *	1000	51689.035.022	ST4,8X9,5MM *	1000	51689.048.009	ST5,5X60MM *	200	51689.055.060
ST3,5X25MM	200	51689.035.025	ST4,8X13MM *	1000	51689.048.013	ST6,3X16MM	100	51689.063.016
ST3,5X32MM	200	51689.035.032	ST4,8X16MM	200	51689.048.016	ST6,3X19MM *	500	51689.063.019
ST3,5X38MM *	1000	51689.035.038	ST4,8X19MM	200	51689.048.019	ST6,3X22MM *	500	51689.063.022
ST3,9X13MM	200	51689.039.013	ST4,8X22MM *	1000	51689.048.022	ST6,3X25MM	100	51689.063.025
ST3,9X16MM	200	51689.039.016	ST4,8X25MM	200	51689.048.025	ST6,3X32MM	100	51689.063.032
ST3,9X19MM	200	51689.039.019	ST4,8X32MM	200	51689.048.032	ST6,3X38MM	100	51689.063.038
ST3,9X22MM *	1000	51689.039.022	ST4,8X38MM	200	51689.048.038	ST6,3X45MM *	200	51689.063.045
ST3,9X25MM	200	51689.039.025	ST4,8X45MM	200	51689.048.045	ST6,3X50MM	100	51689.063.050
ST3,9X32MM	200	51689.039.032	ST4,8X50MM	200	51689.048.050			
ST3,9X38MM	200	51689.039.038	ST4,8X60MM *	200	51689.048.060			

6

Cross recessed mushroom head tapping screw with flange

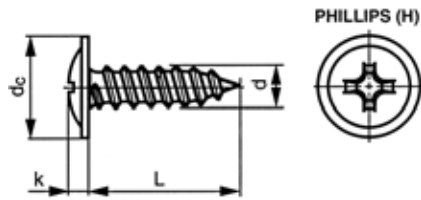


Technical data

	ST3,5	ST3,9	ST4,2	ST4,8
d	3,5	3,9	4,2	4,8
P	1,3	1,4	1,4	1,6
d _c (max.)	9	10	10	11,5
k	2,3	2,5	2,6	2,7
No. cross recess	2	2	2	2

26456 Cross recessed mushroom head tapping screw with flange Phillips

J03A



Thread	Self tapping thread
Material	Steel
Surface treatment	Zinc plated black passivated
Packaging	Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
ST3,5X16MM	100	26456.035.016	ST4,2X13MM	100	26456.042.013	ST4,8X16MM	100	26456.048.016
ST3,9X9,5MM	100	26456.039.009	ST4,2X16MM	100	26456.042.016	ST4,8X19MM	100	26456.048.019
ST3,9X13MM	100	26456.039.013	ST4,2X19MM	100	26456.042.019	ST4,8X25MM	100	26456.048.025
ST3,9X16MM	100	26456.039.016	ST4,2X22MM	100	26456.042.022			
ST3,9X19MM	100	26456.039.019	ST4,2X25MM	100	26456.042.025			
ST3,9X25MM	100	26456.039.025						
			ST4,8X13MM	100	26456.048.013			

6

Cross recessed screw for back panels

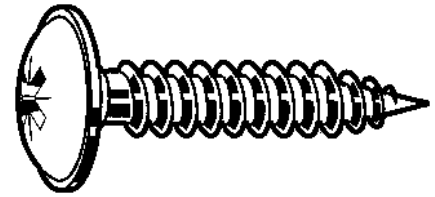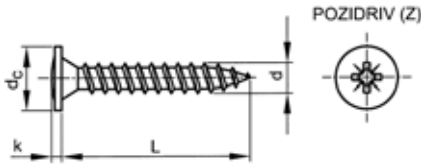


Technical data

d	d _c	k	No. cross recess
3,5	8	1,4	2
4	9	1,7	2
4,5	10	1,9	2
5	11,5	2,1	2

29570 Cross recessed screw for back panels Pozidriv

K04A

Material Steel
Surface treatment Zinc plated
Packaging Standard



d x L	☒	Art.number	d x L	☒	Art.number	d x L	☒	Art.number
3,5X17MM	200	29570.035.017	4X30MM	200	29570.040.030	5X40MM	100	29570.050.040
3,5X20MM	200	29570.035.020	4X35MM	200	29570.040.035	5X60MM	100	29570.050.060
3,5X25MM	200	29570.035.025	4X40MM	200	29570.040.040			
3,5X30MM	200	29570.035.030	4,5X40MM	200	29570.045.040			
3,5X35MM	200	29570.035.035	4,5X45MM	200	29570.045.045			

- Heco-fix plus chip board screw thread.
- Depending on availability the dimensions may deviate.