

BELT DRIVE Industrial - petrol driven - HONDA



key features

Reliable petrol powered compressors - ideal for industrial use. Built in the UK by SIP, these compressors are powered by quality Honda industrial petrol engines.

Offering either mobile or a static permanent installation option in busy and demanding environments.

- Electric start option* available
- Heavy duty pump - for more usable air
- Safety valve for worry free operation
- Automatic unloader valve
- Splash oil lubrication
- Multi bladed flywheel for better cooling
- Dynamically balanced for reduced vibration
- Large finned cylinder head for optimal heat dissipation
- Air receiver exceeds CE regulations
- 3 year parts, 10 year air receiver anti-corrosion warranty

* Battery and leads not included



- 04444 **Airmate Industrial Super ISHP5.5/50**
- 04450 **Airmate Industrial Super ISHP5.5/150** industrial level ★★★★★
- 04451 **Airmate Industrial Super ISHP5.5/150ES Electric Start**

- Powerful Honda GX160 petrol engine
- 15 CFM (425 litres/min) piston displacement
- Item No: 04444 is supplied with a wheel kit, featuring pneumatic tyres for smoother manoeuvrability.
- Items: 04450 and 04451 are supplied as static compressors, for permanent installation.


REQUIRED:

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359



Don't Forget
HONDA SERVICE KIT
(04496)
Page 105

Don't Forget
ANTI-VIBRATION MOUNTS
Page 100

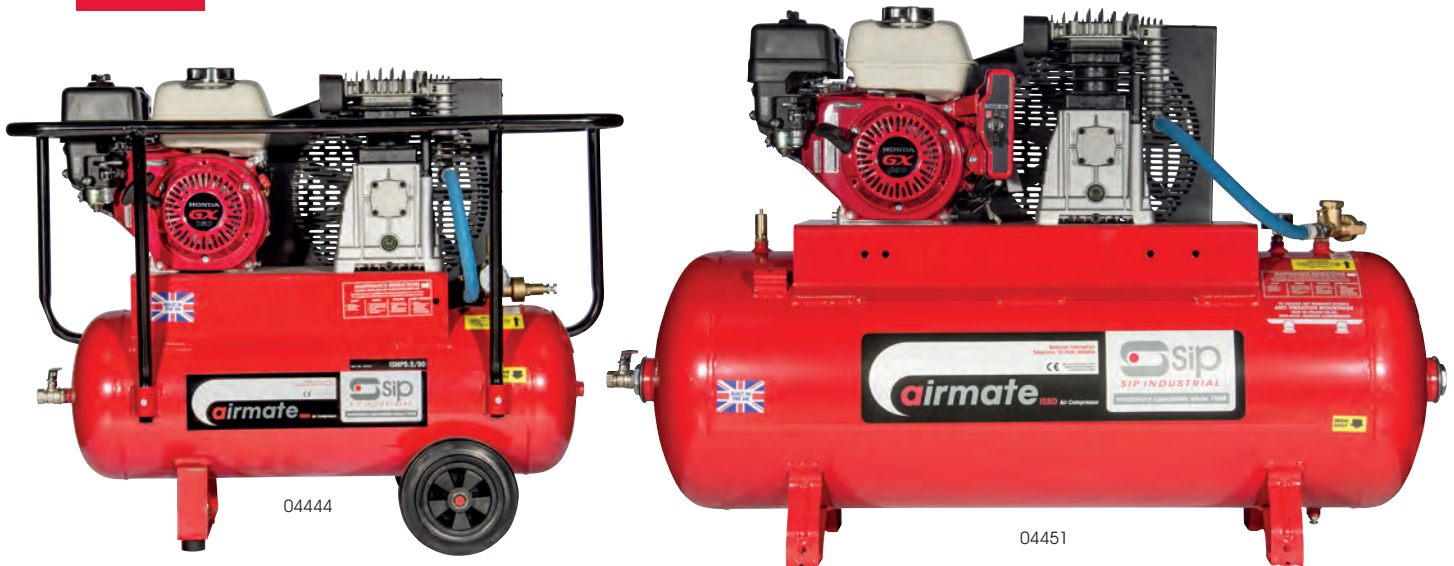

POWERED by
HONDA
3 year engine warranty

- 50 LITRE RECEIVER
- 150 LITRE RECEIVER
- 3 YEAR PARTS WARRANTY
- 10 YEAR AIR RECEIVER ANTI-CORROSION WARRANTY

MODEL	AIRMATE SUPER ISHP5.5/50 †	AIRMATE SUPER ISHP5.5/150 ††	AIRMATE SUPER ISHP5.5/150E/S ††
ITEM NO.	04444	04450	(ELECTRIC START) 04451
Engine	HONDA GX160	HONDA GX160	HONDA GX160
Air Receiver Size	50 litres	150 litres	150 litres
Piston Displacement	15 CFM (425 litres/min)	15 CFM (425 litres/min)	15 CFM (425 litres/min)
Free Air Delivery (F.A.D.)	11 CFM (312 litres/min)	11 CFM (312 litres/min)	11 CFM (312 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1200rpm	1200rpm	1200rpm
No. of Cylinders	2	2	2
No. of Stages	1	1	1
Weight	83kg	111kg	112kg
Packaged Dimensions (HxWxD)	950 x 500 x 1000mm	1020 x 440 x 1450mm	1020 x 440 x 1450mm
Barcode Number	5012713044443	5012713044504	5012713044511

† Recommended for export customers. †† These units are for fixed installation and are not recommended for outdoor use.

BELT DRIVE Industrial - petrol driven - HONDA



- 04452 **Airmate Industrial Super ISHP8/150**
- 04453 **Airmate Industrial Super ISHP8/150ES Electric Start***
- 04456 **Airmate Industrial Super ISHP8/200**
- 04458 **Airmate Industrial Super ISHP8/200ES Electric Start***

industrial level ★★★★

- Very powerful Honda GX240 petrol engine
- 21 CFM (595 litres/min) piston displacement

REQUIRED: Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

* Battery and leads not included




Don't Forget
FUEL CANS
Page 161



Don't Forget
HONDA SERVICE KIT
(04495)
Page 105



Don't Forget
ANTI-VIBRATION MOUNTS
Page 100

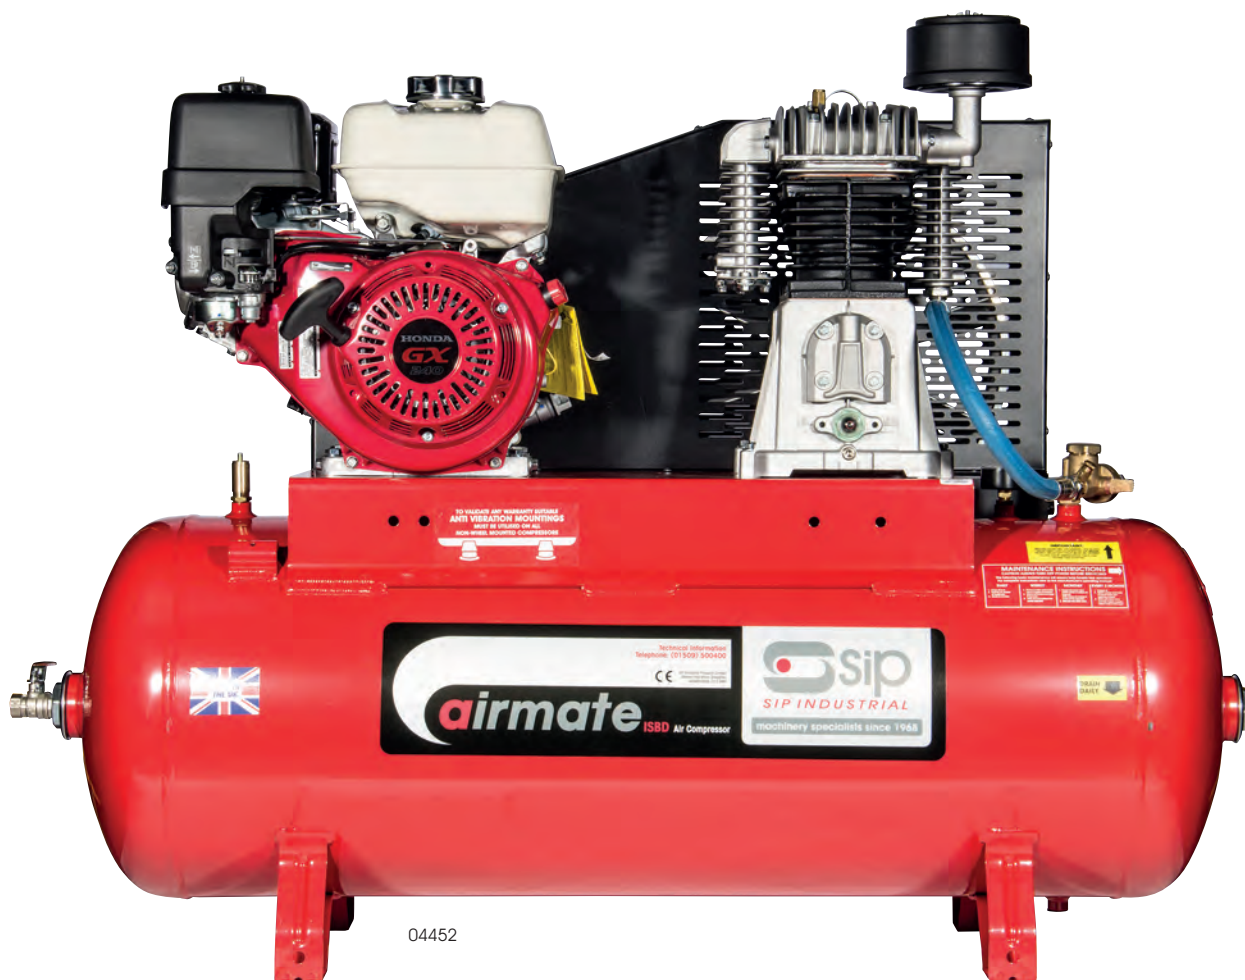

04452



POWERED by HONDA
3 year engine warranty

CAST IRON
BARREL

150 LITRE
RECEIVER

200 LITRE
RECEIVER

3 YEAR
PARTS
WARRANTY

10 YEAR
AIR RECEIVER
ANTI-CORROSION
WARRANTY

MODEL ITEM NO.	AIRMATE SUPER ISHP8/150 ^{††} 04452	AIRMATE SUPER ISHP8/150ES ^{††} (ELECTRIC START) 04453	AIRMATE SUPER ISHP8/200 ^{††} 04456	AIRMATE SUPER ISHP8/200ES ^{††} (ELECTRIC START) 04458
Engine	HONDA GX240	HONDA GX240	HONDA GX240	HONDA GX240
Air Receiver Size	150 litres	150 litres	200 litres	200 litres
Piston Displacement	21 CFM (595 litres/min)	21 CFM (595 litres/min)	21 CFM (595 litres/min)	21 CFM (595 litres/min)
Free Air Delivery (F.A.D.)	15 CFM (425 litres/min)	15 CFM (425 litres/min)	15 CFM (425 litres/min)	15 CFM (425 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1275rpm	1275rpm	1275rpm	1275rpm
No. of Cylinders	2	2	2	2
No. of Stages	2	2	2	2
Weight	141kg	142kg	174.5kg	176kg
Packaged Dimensions (HxWxD)	1050 x 480 x 1140mm	1050 x 480 x 1140mm	1140 x 520 x 1600mm	1140 x 520 x 1600mm
Barcode Number	5012713044528	5012713044535	5012713044566	5012713044580

^{††} These units are for fixed installation and are not recommended for outdoor use.

BELT DRIVE Industrial - petrol driven - HONDA

- 04459 **Airmate Industrial Super ISHP11/150**
- 04465 **Airmate Industrial Super ISHP11/150ES Electric Start***
- 04461 **Airmate Industrial Super ISHP11/200**
- 04463 **Airmate Industrial Super ISHP11/200ES Electric Start***

industrial level ★★★★



- Very powerful Honda GX340 petrol engine
 - 35 CFM (991 litres/min) piston displacement
- REQUIRED:** Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

* Battery and leads not included

Petrol
Powered




Don't Forget
FUEL CANS
Page 161



Don't Forget
HONDA SERVICE KIT
(04496)
Page 105



Don't Forget
ANTI-VIBRATION MOUNTS
Page 100

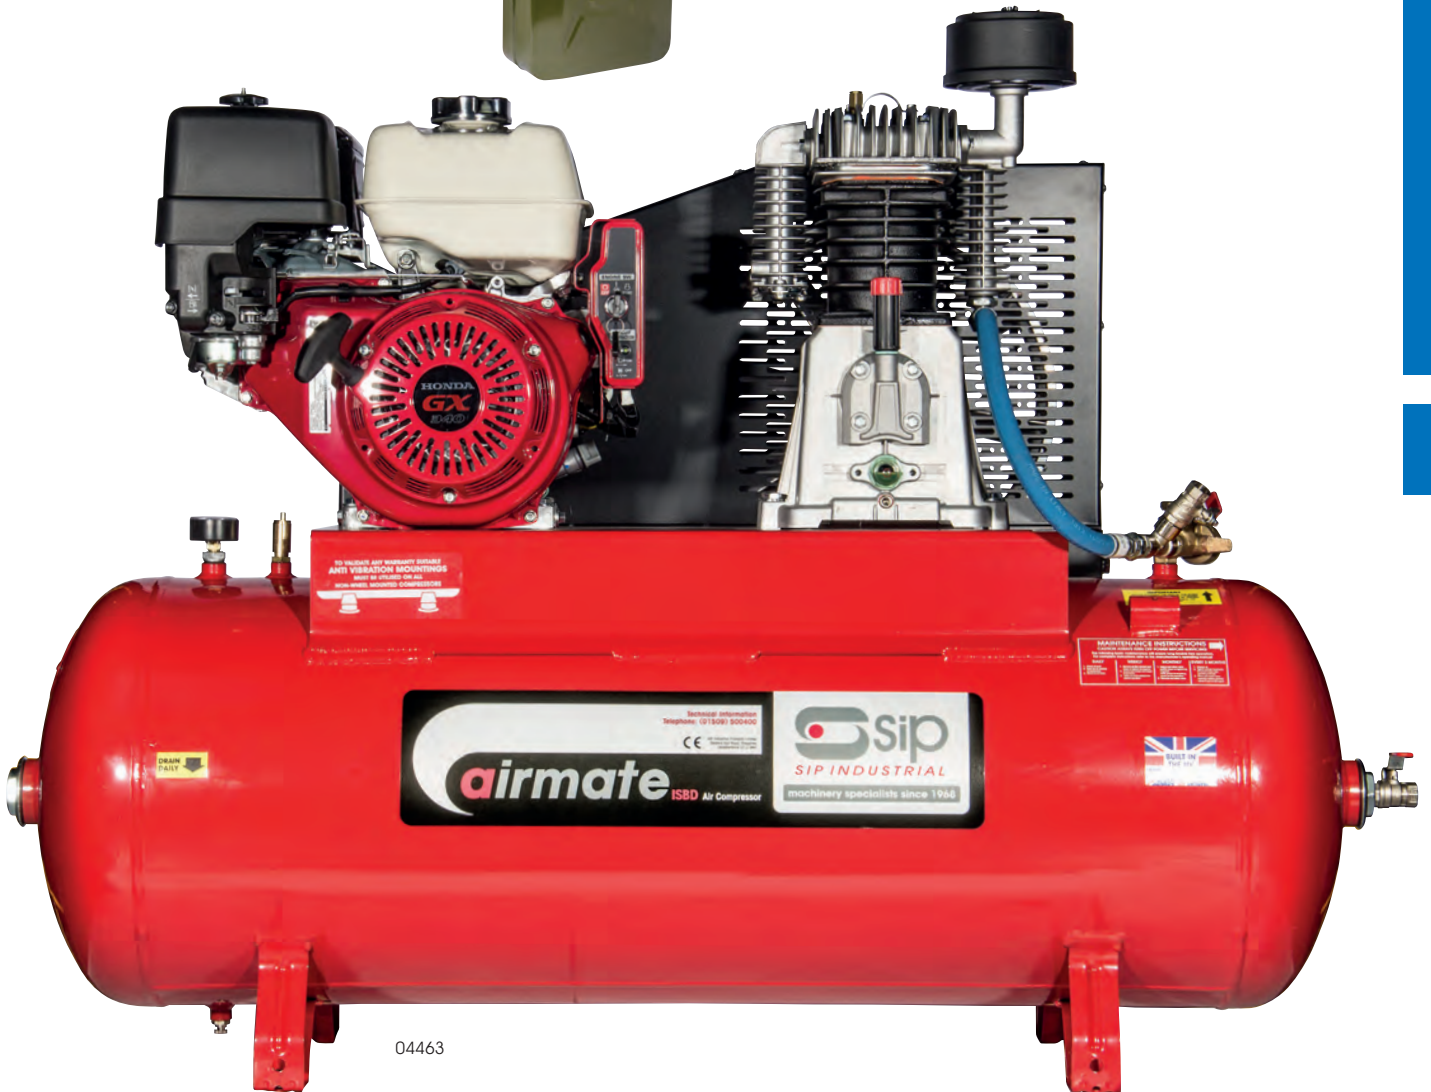

04463

Built and Tested
by SIP in the UK

POWERED by HONDA
3 year engine warranty

CAST IRON BARREL **150 LITRE RECEIVER** **200 LITRE RECEIVER** **3 YEAR PARTS WARRANTY** **10 YEAR AIR RECEIVER ANTI-CORROSION WARRANTY**

MODEL	AIRMATE SUPER ISHP11/150 ^{††}	AIRMATE SUPER ISHP11/150ES ^{††}	AIRMATE SUPER ISHP11/200 ^{††}	AIRMATE SUPER ISHP11/200ES ^{††}
ITEM NO.	04459	(ELECTRIC START) 04465	04461	(ELECTRIC START) 04463
Engine	HONDA GX340	HONDA GX340	HONDA GX340	HONDA GX340
Air Receiver Size	150 litres	150 litres	200 litres	200 litres
Piston Displacement	35 CFM (991 litres/min)	35 CFM (991 litres/min)	35 CFM (991 litres/min)	35 CFM (991 litres/min)
Free Air Delivery (F.A.D.)	26 CFM (736 litres/min)	26 CFM (736 litres/min)	26 CFM (736 litres/min)	26 CFM (736 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1275rpm	1275rpm	1275rpm	1275rpm
No. of Cylinders	2	2	2	2
No. of Stages	2	2	2	2
Weight	146kg	147kg	182kg	183kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm	1050 x 480 x 1140mm	1140 x 520 x 1600mm	1140 x 520 x 1600mm
Barcode Number	5012713044597	5012713044658	5012713044610	5012713044634

^{††} These units are for fixed installation and are not recommended for outdoor use.

BELT DRIVE Industrial - petrol driven - KOHLER

key features

Reliable petrol powered compressors - ideal for industrial use. Built in the UK by SIP, these compressors are powered by quality Kohler industrial petrol engines.

Offering either mobile or a static permanent installation option in busy and demanding environments.

- Electric start option available*
- **Quad Clean™** heavy duty cyclonic air cleaner - cyclonic action forces large particles of contaminants out of the engine
- Engine designed in the USA
- **Air receiver exceeds CE regulations**
- **3 year parts, 10 year air receiver anti-corrosion warranty**

© Copyright Kohler Co.

* Battery and leads not included




Quad Clean™ Cyclonic air cleaner

- 04328 **Airmate Industrial Super ISKP7/50**
- 04330 **Airmate Industrial Super ISHP7/150**
- 04331 **Airmate Industrial Super ISHP7/150ES Electric Start***

industrial level ★★★★★

- Powerful Kohler® 7hp petrol engine
- 16 CFM (453 litres/min) piston displacement
- Item No: 04328 is supplied with a wheel kit, featuring pneumatic tyres for smoother manoeuvrability
- Items: 04330 and 04331 are supplied as static compressors, for permanent installation, a wheel kit is available as an option.

REQUIRED: Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

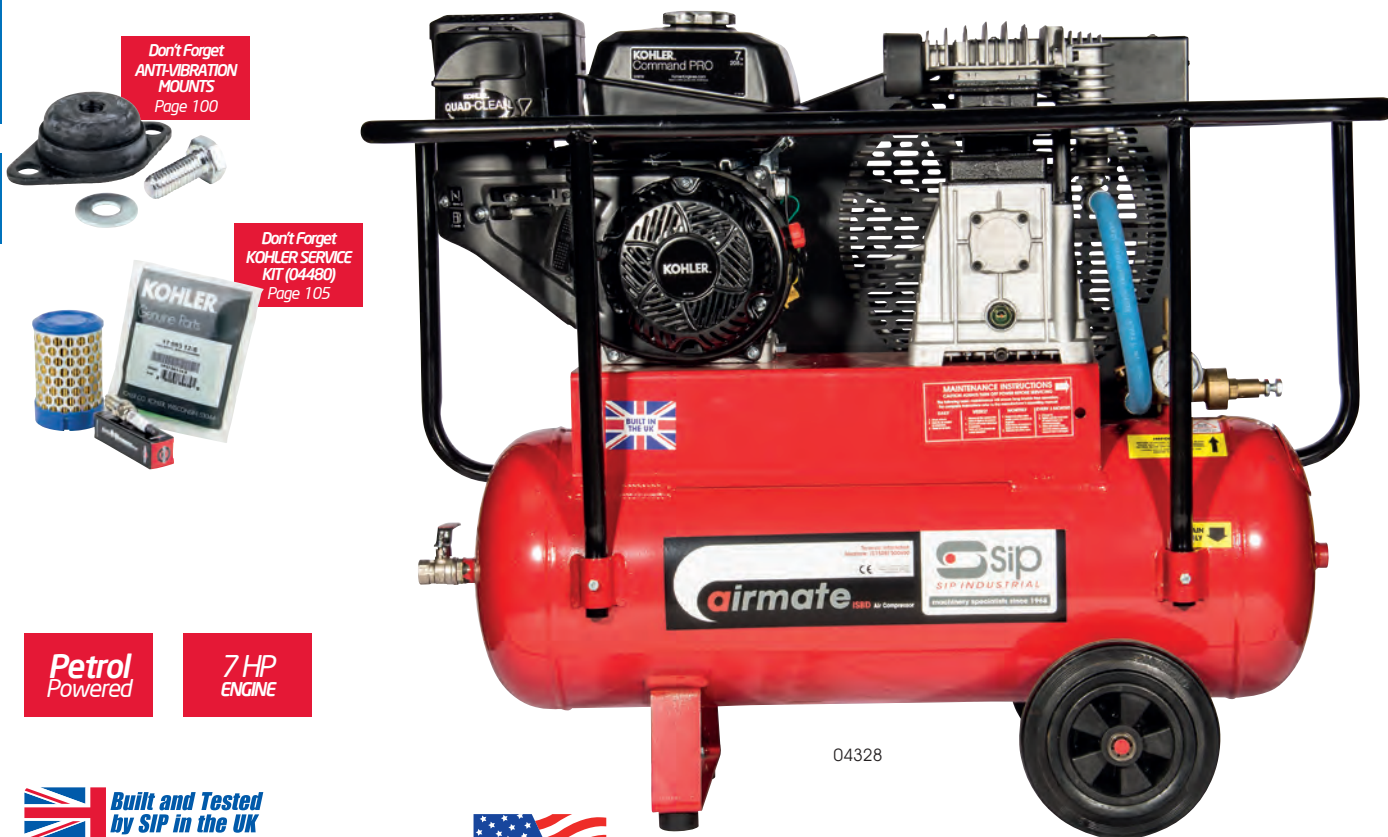

Don't Forget ANTI-VIBRATION MOUNTS Page 100

Don't Forget KOHLER SERVICE KIT (04480) Page 105

Petrol Powered **7 HP ENGINE**

04328

Built and Tested by SIP in the UK

ENGINE DESIGNED IN USA

KOHLER Relentless Power. Legendary Performance. **3 year engine warranty**

50 LITRE RECEIVER **150 LITRE RECEIVER** **3 YEAR PARTS WARRANTY** **10 YEAR AIR RECEIVER ANTI-CORROSION WARRANTY**

MODEL ITEM NO.	AIRMATE SUPER ISKP7/50 †	AIRMATE SUPER ISKP7/150 ††	AIRMATE SUPER ISKP7/150ES †† (ELECTRIC START) 04331
Engine	KOHLER 7hp	KOHLER 7hp	KOHLER 7hp
Air Receiver Size	50 litres	150 litres	150 litres
Piston Displacement	16 CFM (453 litres/min)	16 CFM (453 litres/min)	16 CFM (453 litres/min)
Free Air Delivery (F.A.D.)	11 CFM (324 litres/min)	11 CFM (324 litres/min)	11 CFM (324 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1200rpm	1200rpm	1200rpm
No. of Cylinders	2	2	2
No. of Stages	1	1	1
Weight	85kg	114kg	115kg
Packaged Dimensions (HxWxL)	950 x 500 x 1000mm	1020 x 440 x 1450mm	1020 x 440 x 1450mm
Barcode Number	5012713043286	5012713043309	5012713043316

† Recommended for export customers. †† These units are for fixed installation and are not recommended for outdoor use.

BELT DRIVE Industrial - petrol driven - KOHLER

- 04332 **Airmate Industrial Super ISKP9.5/150**
- 04333 **Airmate Industrial Super ISKP9.5/150ES Electric Start***
- 04334 **Airmate Industrial Super ISKP9.5/200**
- 04335 **Airmate Industrial Super ISKP9.5/200ES Electric Start***

industrial level ★★★★



- Powerful Kohler® 9.5hp petrol engine
- 23 CFM (678 litres/min) piston displacement

REQUIRED: Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

* Battery and leads not included

**Petrol
Powered**

**9.5 HP
ENGINE**




Don't Forget
FUEL CANS
Page 161



Don't Forget
**KOHLER SERVICE
KIT (04480)**
Page 105



Don't Forget
**ANTI-VIBRATION
MOUNTS**
Page 100

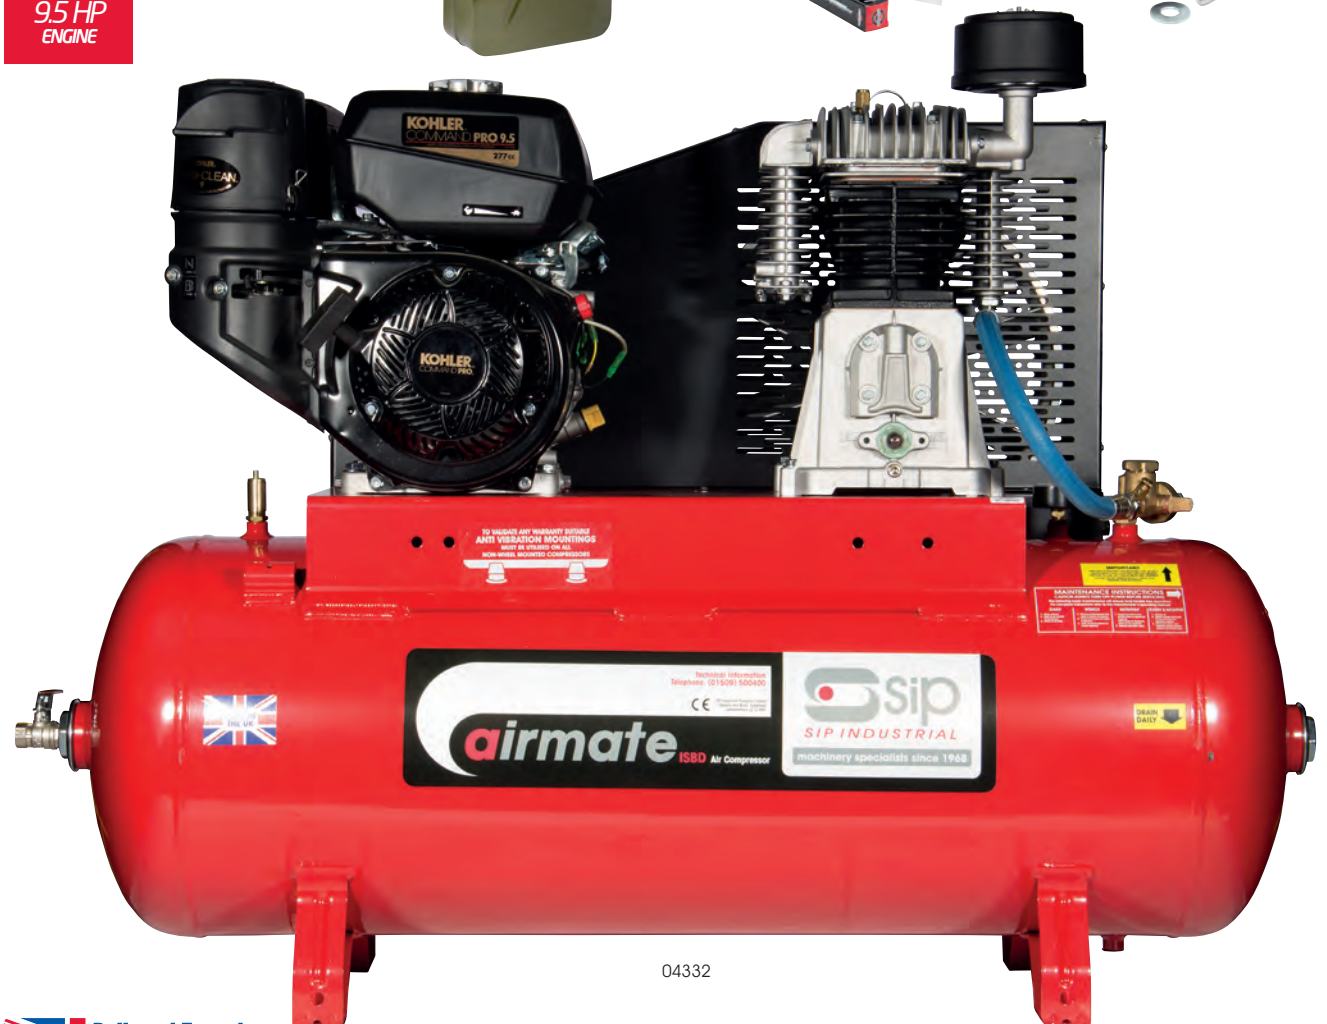

04332

**Built and Tested
by SIP in the UK**

KOHLER | Relentless Power.
3 year engine warranty | Legendary Performance.



**150 LITRE
RECEIVER** **200 LITRE
RECEIVER** **3 YEAR
PARTS
WARRANTY** **10 YEAR
AIR RECEIVER
ANTI-CORROSION
WARRANTY**

MODEL	AIRMATE SUPER ISKP9.5/150 ^{††}	AIRMATE SUPER ISKP9.5/150ES ^{††}	AIRMATE SUPER ISKP9.5/200 ^{††}	AIRMATE SUPER ISKP9.5/200ES ^{††}
ITEM NO.	04332	(ELECTRIC START) 04333	04334	(ELECTRIC START) 04335
Engine	KOHLER 9.5hp	KOHLER 9.5hp	KOHLER 9.5hp	KOHLER 9.5hp
Air Receiver Size	150 litres	150 litres	200 litres	200 litres
Piston Displacement	23 CFM (678 litres/min)	23 CFM (678 litres/min)	23 CFM (678 litres/min)	23 CFM (678 litres/min)
Free Air Delivery (F.A.D.)	17 CFM (501 litres/min)	17 CFM (501 litres/min)	17 CFM (501 litres/min)	17 CFM (501 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1400rpm	1400rpm	1400rpm	1400rpm
No. of Cylinders	2	2	2	2
No. of Stages	2	2	2	2
Weight	143kg	145kg	178kg	180kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm	1050 x 480 x 1140mm	1040 x 520 x 1600mm	1040 x 520 x 1600mm
Barcode Number	5012713043323	5012713043330	5012713043347	5012713043354

^{††} These units are for fixed installation and are not recommended for outdoor use.

BELT DRIVE Industrial - petrol driven - KOHLER



- 04336 **Airmate Industrial Super ISKP14/150**
- 04337 **Airmate Industrial Super ISKP14/200**
- 04338 **Airmate Industrial Super ISKP14/200ES Electric Start***

industrial level ★★★★

- Powerful Kohler® 14hp petrol engine
- 35 CFM (1032 litres/min) piston displacement

REQUIRED: Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

* Battery and leads not included



Don't Forget
FUEL CANS
Page 161



Don't Forget
KOHLER SERVICE KIT (04480)
Page 105



Don't Forget
ANTI-VIBRATION MOUNTS
Page 100

Petrol
Powered

14 HP
ENGINE



04337

Built and Tested by SIP in the UK

KOHLER
3 year engine warranty

Relentless Power.
Legendary Performance.

ENGINE DESIGNED IN USA

- OIL LUBRICATED**
- CAST IRON BARREL**
- 150 LITRE RECEIVER**
- 200 LITRE RECEIVER**
- 3 YEAR PARTS WARRANTY**
- 10 YEAR AIR RECEIVER ANTI-CORROSION WARRANTY**

MODEL	AIRMATE SUPER ISKP14/150 ^{††}	AIRMATE SUPER ISKP14/200 ^{††}	AIRMATE SUPER ISKP14/200ES ^{††}
ITEM NO.	04336	04337	(ELECTRIC START) 04338
Engine	KOHLER 14hp	KOHLER 14hp	KOHLER 14hp
Air Receiver Size	150 litres	200 litres	200 litres
Piston Displacement	35 CFM (1032 litres/min)	35 CFM (1032 litres/min)	35 CFM (1032 litres/min)
Free Air Delivery (F.A.D.)	26 CFM (736 litres/min)	26 CFM (736 litres/min)	26 CFM (736 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1275rpm	1275rpm	1275rpm
No. of Cylinders	2	2	2
No. of Stages	2	2	2
Weight	150kg	190kg	192kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm	1140 x 520 x 1600mm	1140 x 520 x 1600mm
Barcode Number	5012713043361	5012713043378	5012713043385

^{††} These units are for fixed installation and are not recommended for outdoor use.