DIRECT DRIVE / Oil Free

O5291 Super Boxy Compressor

- 6.4 CFM piston displacement
- 8 bar maximum pressure
- Built-in remote pressure regulator on hose
- · Integrated tool storage
- Built-in 2 litre air receiver

KIT COMPRISES:

Blow gun, inflator gun, 3 needles (for inflating balls, bicycle tyres or small inflatable mattresses and 3 metre rubber hose



trade level ★★

Built-in remote pressure regulator on hose for added convenience

OIL FREE

m	Supply	230v (13amp)
-11	Air Receiver Size	2 litres
	Motor	1.5hp (1.1kW)
	Piston Displacement	6.4 CFM (198 litres/min)
x. Free Air Delivery (F.A.D.)		4.0 CFM (113 litres/min)
	Max. Pressure	116psi (8.0 bar)
	Noise Level	97dB(A)
	Weight	9kg
aged Dimensions (HxWxL)		342 x 150 x 555mm
Barcode Number		5012713052912



O5293 Super Squirrel Compressor

• 7.7 CFM piston displacement

• 8 bar maximum pressure



trade level ★★



inflating gun, 3 needles (for inflating balls, bicycle tyres or small inflatable mattresses, inflator gun with gauge and 3 metre recoil air hose.

trade level ★★

ITEM NO.	05293
Supply	230v (13amp)
Air Receiver Size	6 litres
Motor	2.0hp (1.5kW)
Piston Displacement	7.7 CFM (218 litres/min)
lax. Free Air Delivery (F.A.D.)	5.0 CFM (142 litres/min)
Max. Pressure	116psi (8.0 bar)
Noise Level	97dB(A)
Weight	13kg
ckaged Dimensions (HxWxL)	535 x 245 x 450mm
Rarcode Number	5012713052936



integrated storage compartment

05295 Airmate Hurricane 6

- 6.4 CFM piston displacement
- 8 bar maximum pressure
- Integrated control panel with easy to read gauge
- Neat rear cable storage hooks



ITEM NO. 230v (13amp) 6 litres 1.5hp (1.1kW) 6.4 CFM (181 litres/min) Motor Piston Displacement Max. Free Air Delivery (F.A.D.) 4.0 CFM (113 litres/min) 116psi (8.0 bar) 97dB(A) Max. Pressure Packaged Dimensions (HxWxL) 370 x 355 x 315mm Barcode Number 5012713052950



06225 Airmate Hurricane 25-O

- 7 CFM piston displacement
- 8 bar maximum pressure
- Ultra modern design
- · Wheel mounted for easy manoeuvrability





trade level ★★

Useful integrated tool tray

OIL FREE	WHEEL
	MODIVILL





ITEM NO.	06225
Supply	230v (13amp)
Air Receiver Size	24 litres
Motor	1.5hp (1.1kW)
Piston Displacement	7.0 CFM (198 litres/min)
Max. Free Air Delivery (F.A.D.)	4 CFM (113 litres/min)
Max. Pressure	116psi (8.0 bar)
Noise Level	97dB(A)
Weight	21kg
Packaged Dimensions (HxWxL)	440 x 255 x 575mm
Barcode Number	5012713062256



06236 Airmate TN1.5/25-O

- 7 CFM piston displacement
- Huge 10 bar maximum pressure
- · Ultra modern design
- Extra large wheels and extra long handle for superb mobility





trade level **

Useful integrated tool tray





trade level ★★









06296 Airmate Hurricane 245/25 with 7 Piece Air Kit

- 8 CFM piston displacement
- 8 bar maximum pressure
- Wheel mounted for easy manoeuvrability

Gravity fed spray gun, inflating gun, 3 nozzles and 5 metre coiled air hose



OIL FREE	WHEEL MOUNTED	24 LITRE RECEIVER
ITEM NO.		06296
Supply	230v (13amp)	
Air Receiver Size	24 litres	
Motor	2.0hp (1.5kW)	
Piston Displacement	t 8.0 CFM (226 litres/min)	
Max. Free Air Delivery (F.A.D.)	5.4 CFM (153 litres/min)	
Max. Pressure	re 116psi (8.0 bar)	
Noise Level	el 97dB(A	
Weight	nt 19.5kg	
Packaged Dimensions (HxWxL)	595 x 250 x 565mm	
Barcode Number	r 5012713062966	



DIRECT DRIVE / Oil Free

Airmate Vertical Compressors

Our fantastic range of super space saving vertical compressors are perfect where space in the workshop is tight.

- Space saving design
- Integrated top mounted control panel with easy to read gauge
- Oil free operation Convenient top handle
- · Complete with regulator
- · Easy turn drain valve



top mounted control panel - 06249



top mounted control panel - 06243



top mounted control panel - 06245







Search YouTube for: SipTechZone



trade level ★★







06245









MODEL	AIRMATE HURRICANE V215/25	AIRMATE HURRICANE V245/50	AIRMATE HURRICANE V300/100
ITEM NO.	06249	06243	06245
Supply	230v (13amp)	230v (13amp)	230v (13amp)
Air Receiver Size	24 litres	50 litres	100 litres
Motor	1.5hp (1.1kW)	2.0hp (1.5kW)	2.5hp (1.8kW)
Piston Displacement	6.5 CFM (148 litres/min)	8.0 CFM (226 litres/min)	10 CFM (283 litres/min)
Max. Free Air Delivery (F.A.D.)	3 CFM (85 litres/min)	5.4 CFM (153 litres/min)	6.7 CFM (190 litres/min)
Max. Pressure	116psi (8 bar)	116psi (8 bar)	116psi (8 bar)
Noise Level	97dB(A)	97dB(A)	97dB(A)
Wheel Mounted	x	V	V
Weight	16.3kg	22.2kg	45kg
Packaged Dimensions (HxWxL)	640 x 310 x 320mm	845 x 330 x 330mm	1100 x 460 x 470mm
Barcode Number	5012713062492	5012713062430	5012713062454

05281 Airmate TN2/50-O

- 8 CFM piston displacement
- 8 bar maximum pressure
- Wheel mounted for improved manoeuvrability

ltalian Design	OIL FREE	WHEEL MOUNTED	50 LITRE RECEIVER
ITEM	I NO.		05281
S	Supply	2	230v (13amp)
Air Receive	r Size		50 litres
	Motor	2	2.0hp (1.5kW)
Piston Displace	ement	8.0 CFM (2	26 litres/min)
Max. Free Air Delivery (F	A.D.)	5.0 CFM (14	1.6 litres/min)
Max. Pre	essure	11	6psi (8.0 bar)
Noise	Level		95dB(A)
V	Veight		30kg
Packaged Dimensions (H)	(WxL)	690 x 8	340 x 330mm
Barcode Nu	ımber	501	2713052813



50 LITRE

Airline from SIP

Outstanding value-for-money, these Airline compressors are exclusive from SIP. Oil lubricated for longer life, these models include twin gauges, plus they're wheel mounted for easy manoeuvrability.

The VDX/50 model features a heavy-duty 'V-Twin' pump for optimum performance.

Aldine RC2/24 & RC/50 Compressors

item No: 05297 - 24 litre air receiver item No: 05289 - 50 litre air receiver

- 8CFM piston displacement
- 8 bar maximum pressure
- Available in 24 and 50 litre air receiver sizes
- Efficient cooling system
- External air filters for easy access
- · Wheel mounted for improved manoeuvrability
- Oil lubricated





05297	05289
230v (13amp)	230v (13amp)
24 litres	50 litres
2.0hp (1.5kW)	2.0hp (1.5kW)
8.0 CFM (227 litres/min)	8.0 CFM (226 litres/min)
4.8 CFM (136 litres/min)	4.8 CFM (136 litres/min)
116psi (8.0 bar)	116psi (8.0 bar)
94dB(A)	94dB(A)
25kg	33kg
570 x 260 x 580mm	765 x 325 x 660mm
5012713052974	5012713052899
	230v (13amp) 24 litres 2.0hp (1.5kW) 8.0 CFM (227 litres/min) 4.8 CFM (136 litres/min) 116psi (8.0 bar) 94dB(A) 25kg 570 x 260 x 580mm

Althe VDX/50 CM3 Compressor

item No: 05287

- 13CFM piston displacement
- 8 bar maximum pressure
- 50 litre air receiver
- 'V-Twin' pump for optimum efficiency and performance
- Efficient cooling system
- External air filters for easy access
- Wheel mounted for improved manoeuvrability
- Oil lubricated



DIRECT DRIVE Compressors

Key features
The crankcase and head on these compressors are made of aluminium for efficient cooling. Ideal for light professional and serious home users looking for high performance and a good air reserve.

- Oil lubricated for long life
- · Cast iron barrel
- Tanks conform to full CE directives
- · Wheel mounted



06233 Airmate Nimbus 25 06234 Airmate Nimbus 50

- 2hp (1.5kW) motor
- 8 CFM piston displacement
- 25 and 50 litre receiver options available
- · Wheel mounted for improved manoeuvrability





06233	06234
230v (13amp)	230v (13amp)
25 litres	50 litres
2.0hp (1.5kW)	2.0hp (1.5kW)
8.0 CFM (226 litres/min)	8.0 CFM (226 litres/min)
5.3 CFM (150 litres/min)	5.3 CFM (150 litres/min)
116psi (8.0 bar)	116psi (8.0 bar)
94dB(A)	94dB(A)
22kg	32kg
580 x 260 x 565mm	630 x 315 x 775mm
5012713062331	5012713062348
	230v (13amp) 25 litres 2.0hp (1.5kW) 8.0 CFM (226 litres/min) 5.3 CFM (150 litres/min) 116psi (8.0 bar) 94dB(A) 22kg 580 x 260 x 565mm

06238 Airmate TN2.5/25-D 05283 Airmate TN2.5/50-D

- 2.5hp (1.8kW) motor
- 9.5 CFM piston displacement
- 25 and 50 litre receiver options available
- · Wheel mounted for improved manoeuvrability






DARREL	LOBRICATED MOUNTED	RECEIVER RECEIVER
ITEM NO.	06238	05283
Supply	230v (13amp)	230v (13amp)
Air Receiver Size	25 litres	50 litres
Motor	2.5hp (1.8kW)	2.5hp (1.8kW)
Piston Displacement	9.5 CFM (270 litres/min)	9.5 CFM (270 litres/min)
Max. Free Air Delivery (F.A.D.)	6.5 CFM (184 litres/min)	6.5 CFM (184 litres/min)
Max. Pressure	116psi (8.0 bar)	116psi (8.0 bar)
Noise Level	94dB(A)	94dB(A)
Weight	25kg	36kg
Packaged Dimensions (HxWxL)	590 x 600 x 255mm	650 x 830 x 325mm
Barcode Number	5012713062386	5012713052837

trade level ★★

06242 Airmate TN3/50-D 05299 Airmate TN3/100-D



- 14 CFM piston displacement
- Smooth 'V-Twin' aluminium pump
- 50 and 100 litre receiver options available
- · Wheel mounted for improved manoeuvrability



Super smooth 'V-Twin' aluminium pump





100 LITRE RECEIVER

5012713052998

Italian

9 bar MAX. PRESSURE

ITEM NO.	06242	05299
Supply	230v (13amp)	230v (13amp)
Air Receiver Size	50 litres	100 litres
Motor	3.0hp (2.2kW)	3.0hp (2.2kW)
Piston Displacement	14.0 CFM (397 litres/min)	14.0 CFM (397 litres/min)
Max. Free Air Delivery (F.A.D.)	9.5 CFM (269 litres/min)	9.5 CFM (269 litres/min)
Max. Pressure	130psi (9.0 bar)	130psi (9.0 bar)
Noise Level	97dB(A)	97dB(A)
Weight	45kg	56kg
Packaged Dimensions (HxWxL)	670 x 830 x 350mm	1070 x 820 x 370mm
Barcode Number	5012713062423	5012713052998

www.sip-group.com

Weight

Pressure Regulator Included

Packaged Dimensions (HxWxL)

Key features
This compressor range features an extra hard wearing pump for long lasting reliability and resistance to wear. Finned cast iron barrels and aftercooler to improve cooling and an oversized crankcase for better lubrication. Ideal for





5012713062607 * PRESSURE REGULATOR NOT INCLUDED - SEE BELOW OPTION 1: 02080 MIDI FILTER REGULATOR + 51386 REDUCING BUSH (fop mount) + 51384 ELBOW (end mount) OPTION 2: 02085 MAXI 12 FILTER REGULATOR + 51384 ELBOW (end mount) SEE PAGES 101 & 104 FOR MORE DETAILS

69kg

800 x 1105 x 420mm

39kg

770 x 860 x 320mm

83kg

990 x 1300 x 430mm

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts

REQUIRED:

- SIP item no. 02357

trade level ★★

06290 Airmate 3HP/150-SRB

- Powerful 3hp (2.2kW) motor
- 13CFM (368 litre/min) piston displacement
- 150 litre air receiver
- Cast iron block
- · Aluminium aftercooler
- Oil lubricated



06294 Airmate 3HP/200-SRB

- Powerful 3hp (2.2kW) motor
- 13CFM (368 litre/min) piston displacement
- 200 litre air receiver
- Cast iron block







Stationary compressors must be fitted with anti-vibration mountings, suggested mounts

trade level ★★

- SIP item no. 02357



51384 ELBOW (end mount) SEE PAGES 101 & 104 FOR MORE DETAILS

Made

04292 Forty MkII TN3/150-SRB + 7 Piece Air Kit

- trade level ★★

- Fortieth anniversary edition
- Automatic start/stop control
- Twin threaded outlets
- Tank gauge & drain valve

KIT COMPRISES:

Spray gun, duster gun, tyre inflator, hose and a selection of fittings



04294 Forty MkII TN3/200-SRB + Air Impact Wrench & Air Kit



- · Fortieth anniversary edition
- Automatic start/stop control
- · Twin threaded outlets
- Tank gauge & drain valve

WRENCH & KIT COMPRISES:

1/2" Impact Wrench with 15mm, 17mm, 19mm and 21mm sockets, tyre inflator and hose. All complete with 'quick-couplers'.



05300 Airmate PX3/150-SRB

- Powerful 3hp (2.2kW) motor
- B3800 pump fitted as standard
- 16 CFM (453 litre/min) piston displacement
- 150 litre air receiver
- Cast iron barrel
- · Multi-finned flywheel for improved cooling



05302 Airmate PX3/200-SRB

• Powerful 3hp (2.2kW) motor

• 200 litre air receiver

- B3800 pump fitted as standard
- 16 CFM (453 litre/min) piston displacement



REQUIRED:

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02357

trade level ★★



trade level ★★

05251 Airmate B3800/270 Tandem

- 2 x 3hp motors maximum power from a single phase 230v (32amp) supply.
- $\bullet\,$ Twin pump units added benefit of single continued operation in the event of a single pump or motor failure
- 2 x twin cylinder single stage pumps
- 270 litre air receiver
- · High efficiency pump

· Aluminium die cast valve plate with steel rods



सद्यास्ट्रा

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02357







ITEM NO.	05251
Supply	230v (32amp)
Air Receiver Size	270 litres
Motor	2 x 3hp (2.2kW)
Piston Displacement	32 CFM (906 litres/min)
Max. Free Air Delivery (F.A.D.)	22 CFM (623 litres/min)
Max. Pressure	145psi (10 bar)
Weight	170kg
Packaged Dimensions (HxWxL)	1200 x 605 x 1700mm
Barcode Number	5012713052516

06583

airmate Sip

trade level ★★

06583 Airmate TN5.5/200

- 24 CFM (680 litres/min) piston displacement
- 2 stage pump for greater efficiency
- · Heavy duty knock resistant flywheel guard
- Cast iron barrel

06585 Airmate TN7.5/270

- 34 CFM (963 litres/min) piston displacement
- 2 stage pump for greater efficiency
- · Heavy duty knock resistant flywheel guard
- · Cast iron barrel

06587 Airmate TN10/270

- 42 CFM (1189 litres/min) piston displacement
- 2 stage pump for greater efficiency
- Heavy duty knock resistant flywheel guard
- Cast iron barrel





AIRMATE TN5.5/200 ITEM NO Supply Air Receiver Size Motor 415v (20amp) - 3ph 415v (20amp) - 3ph 415v (20amp) - 3ph 200 litres 5.5hp (4.1kW) 270 litres 7.5hp (5.6kW) 270 litres 10hp (7.5kW) Piston Displacement
Max. Free Air Delivery (F.A.D.)
Max. Pressure 24 CFM (680 litres/min) 18 CFM (510 litres/min) 34 CFM (963 litres/min) 25 CFM (708 litres/min) 42 CFM (1189 litres/min) 28 CFM (793 litres/min) 145psi (10 bar) 145psi (10 bar) 145psi (10 bar) No. of Cylinders No. of Stages 145kg 157kg 1340 x 540 x 1620mm 200kg Weight Packaged Dimensions (HxWxL) 1140 x 550 x 1500mm 1340 x 540 x 1620mm Barcode Numbe 5012713065837 5012713065851 5012713065875

06587

DIRECT DRIVE Professional - Oil Free

key features

A range of professional direct drive compressors made for frequent use. Ideal for professionals looking for high performance and a good air reserve. Innovative compressors delivering quality, reliability and

- Compact and highly portable
- Extra large gauges for easy reading*
- Ergonomic pressure reducer knobs with adjustment
- Two year warranty

*not 06248

13amp supply

Year

06248 Airmate OM200/6 proTECH

- Compact and highly portable
- 5 CFM piston displacement
- · Ergonomic pressure reducer knobs with adjustment
- Low noise only 85dB(A)
- Slow running, smooth operation

professional level ★★★









OIL FREE

ITEM NO 06248 Supply Air Receiver Size 6 litres 1.0hp (0.75kW) 5.0 CFM (140 litres/min) 2.0 CFM (56.6 litres/min) Piston Displacement Max. Free Air Delivery (F.A.D.) Max. Pressure 118psi (8.0 bar) Noise Leve 85dB(A) Weight Packaged Dimensions (HxWxL) 540 x 530 x 210mm Barcode Numbe 5012713062485

Airmate OL197/10RC proTECH

Available in:
 230v (06254) or
 110v (06256) supply

Italian

Design

- 8 CFM piston displacement
- · Heavy duty pump
- Oil-free operation maintenance free
- Easy to use extra large gauges and adjustment knobs
- · Hidden hose storage
- Lightweight protection frame with integrated carry handle



Integrated foot plate - extra height when required

professional level ★★★



Unique, integrated pressure control panel



professional level ***

Barcode Numbe

5012713052530

professional level ★★★

DIRECT DRIVE Professional - Oil Free & Oil Lubricated



• Compact and highly portable • 9.2 CFM piston displacement

• Ergonomic pressure reducer knobs with adjustment

• 10 bar maximum pressure



110v SUPPLY

2 Year Warranty

10 bar



05245 Airmate F1 260/50 proTECH

• 11 CFM piston displacement

· Oil lubricated

2 Year Warranty

HUGE 10 bar AX. PRESSURE

13атр ѕиррцу

· Heavy duty pump

• Heavy duty metal air filter housing - quieter and longer

• Twin, extra strong feet - for improved stability



Made

in Italy

BELT DRIVE Professional

Key features
This compressor range features a hard wearing extra slow running pump unit for long lasting reliability and resistance to wear. Finned cast iron barrels and aftercooler to improve cooling and an oversized crankcase for better lubrication. Ideal for heavy prolonged use - perfect for frequent

2 year warranty



Professional bleed-tap with enlarged passage to avoid blockages

Large adjustment knob & large easy to read dials





06282 Airmate PB3800B3/150 proTECH 06284 Airmate PB3800B3/200 proTECH

- · Powerful 3.0hp motor
- · High 16 CFM piston air displacement from a single phase unit
- Oversized crankcase for better lubrication
- · Oil lubricated
- · Extra large wheels for better mobility
- · Multi-finned flywheel for improved cooling
- Moulded plastic, extra strong belt guard designed for low vibration and provides directional pump cooling
- · Twin front castors for improved stability & manoeuvrability
- · Built-in regulator


06286 Airmate PB3800B4/150 proTECH 06288 Airmate PB3800B4/200 proTECH

- · Powerful 4.0hp motor
- Super high 18 CFM piston air displacement from a single phase unit
- · Oversized crankcase for better lubrication
- · Oil lubricated
- · Extra large wheels for better mobility
- · Multi-finned flywheel for improved cooling
- · Moulded plastic, extra strong belt guard designed for low vibration and provides directional pump cooling
- · Twin front castors for improved stability & manoeuvrability
- · Built-in regulator




SUPER HIGH


18 CFM



professional level ★★★





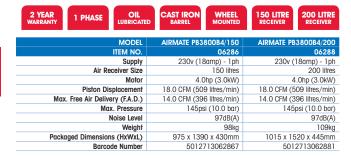



BELT DRIVE Industrial - electric

Airmate Industrial Super Compressors



- Heavy duty induction motors
- Available as 270 litre or 500 litre air reciever size options see below
- Cast iron barrel and flywheel sturdy construction and superior cooling
- Slow running pump lower noise levels, greater reliability and extended life
- Splash oil lubrication for better wear resistance
- V configuration cylinders perfectly balanced
- · Wire mesh safety guard
- Safety valve worry free operation
- Stainless steel valves for durability and wear resistance
- Air receiver exceeds CE regulations
- 3 year parts, 10 year receiver anti-corrosion warranty for peace of mind



Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359













MODEL	AIRMATE ISBD5.5/270	AIRMATE ISBD7.5/270	AIRMATE ISBD10/270	AIRMATE ISBD15/500
ITEM NO.	06289	06291	06295	06297
Supply	400v (20amp) - 3ph	400v (20amp) - 3ph	400v (30amp) - 3ph	400v (35amp) - 3ph
Air Receiver Size	270 litres	270 litres	270 litres	500 litres
Motor	5.5hp (4.1kW)	7.5hp (5.6kW)	10hp (7.5kW)	15hp (11.2kW)
Piston Displacement	23.5 CFM (666 litres/min)	31 CFM (878 litres/min)	38 CFM (1076 litres/min)	61.6 CFM (1744 litres/min)
Free Air Delivery (F.A.D.)	15.5 CFM (439 litres/min)	20.5 CFM (580 litres/min)	25 CFM (708 litres/min)	40.7 CFM (1153 litres/min)
Max. Pressure	160psi (11 bar)	160psi (11 bar)	160psi (11 bar)	160psi (11 bar)
Speed	1290rpm	1200rpm	1000rpm	1200rpm
No. of Cylinders	2	2	2	4
No. of Stages	2	2	2	2
Weight	145kg	180kg	240kg	312kg
Packaged Dimensions (HxWxL)	1080 x 500 x 1570mm	1130 x 500 x 1570mm	1230 x 500 x 1570mm	1360 x 560 x 1990mm
Barcode Number	5012713062898	5012713062911	5012713062959	5012713062973

BELT DRIVE Industrial - petrol driven - HONDA

Key features
Reliable petrol powered compressors - ideal for industrial use.
Built in the UK by SIP, these compressors are powered by quality Honda industrial petrol engines.

Offering either mobile or a static permanent installation option in busy and demanding environments.

- Electric start option* available
- Heavy duty pump for more usable air
- Safety valve for worry free operation
- Automatic unloader valve
- Splash oil lubrication
- · Multi bladed flywheel for better cooling
- Dynamically balanced for reduced vibration
- Large finned cylinder head for optimal heat dissipation
- · Air receiver exceeds CE regulations
- 3 year parts, 10 year air receiver anti-corrosion warranty



04444 Airmate Industrial Super ISHP5.5/50 04450 Airmate Industrial Super ISHP5.5/150 04451 Airmate Industrial Super ISHP5.5/150ES Electric Start



- Powerful Honda GX160 petrol engine
- 15 CFM (425 litres/min) piston displacement
- Item No: 04444 is supplied with a wheel kit, featuring pneumatic tyres for smoother manoeuvrability.
- Items: 04450 and 04451 are supplied as static compressors, for permanent installation.

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359



















MODEL	AIRMATE SUPER ISHP5.5/50 †	AIRMATE SUPER ISHP5.5/150 ⁺⁺	AIRMATE SUPER ISHP5.5/150E/S ^{††}
ITEM NO.	04444	04450	(ELECTRIC START) 04451
Engine	HONDA GX160	HONDA GX160	HONDA GX160
Air Receiver Size	50 litres	150 litres	150 litres
Piston Displacement	15 CFM (425 litres/min)	15 CFM (425 litres/min)	FLECTRIC 15 CFM (425 litres/min)
Free Air Delivery (F.A.D.)	11 CFM (312 litres/min)	11 CFM (312 litres/min)	STARTING 11 CFM (312 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)	150psi (10 bar)
Speed	1200rpm	1200rpm	1200rpm
No. of Cylinders	2	2	2
No. of Stages	1	1	1
Weight	83kg	111kg	112kg
Packaged Dimensions (HxWxL)	950 x 500 x 1000mm	1020 x 440 x 1450mm	1020 x 440 x 1450mm
Barcode Number	5012713044443	5012713044504	5012713044511

BELT DRIVE Industrial - petrol driven - HONDA

04452 Airmate Industrial Super ISHP8/150

04453 Airmate Industrial Super ISHP8/150ES Electric Start*

04456 Airmate Industrial Super ISHP8/200

04458 Airmate Industrial Super ISHP8/200ES Electric Start*

- Very powerful Honda GX240 petrol engine
- 21 CFM (595 litres/min) piston displacement

REQUIRED: Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

* Battery and leads not included










industrial level ★★★★

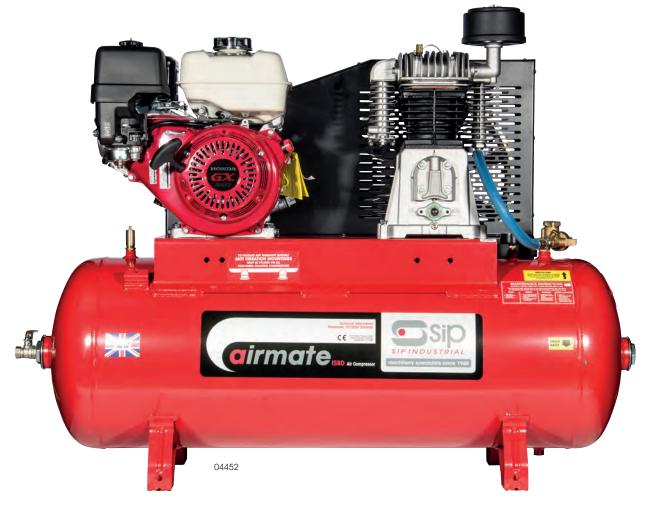















MODEL	AIRMATE SUPER ISHP8/150 ^{††}	AIRMA	TE SUPER ISHP8/150ES **	AIRMATE SUPER ISHP8/200 ^{††}	AIRM	IATE SUPER ISHP8/200ES ^{††}
ITEM NO.	04452		(ELECTRIC START) 04453	04456		(ELECTRIC START) 04458
Engine	HONDA GX240		HONDA GX240	HONDA GX240		HONDA GX240
Air Receiver Size	150 litres		150 litres	200 litres		200 litres
Piston Displacement	21 CFM (595 litres/min)	ELECTRIC	21 CFM (595 litres/min)	21 CFM (595 litres/min)	ELECTRIC	21 CFM (595 litres/min)
Free Air Delivery (F.A.D.)	15 CFM (425 litres/min)	STARTING	15 CFM (425 litres/min)	15 CFM (425 litres/min)	STARTING	15 CFM (425 litres/min)
Max. Pressure	150psi (10 bar)		150psi (10 bar)	150psi (10 bar)		150psi (10 bar)
Speed	1275rpm		1275rpm	1275rpm		1275rpm
No. of Cylinders	2		2	2		2
No. of Stages	2		2	2		2
Weight	141kg		142kg	174.5kg		176kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm		1050 x 480 x 1140mm	1140 x 520 x 1600mm		1140 x 520 x 1600mm
Barcode Number	5012713044528		5012713044535	5012713044566		5012713044580
	11 These units are for fixed installation and are not recommended for outdoor use					

industrial level ★★★★

04459 Airmate Industrial Super ISHP11/150

04465 Airmate Industrial Super ISHP11/150ES Electric Start*

04461 Airmate Industrial Super ISHP11/200

04463 Airmate Industrial Super ISHP11/200ES Electric Start*















MODEL	AIRMATE SUPER ISHP11/150 ⁺⁺	AIRMA'	TE SUPER ISHP11/150ES **	AIRMATE SUPER ISHP11/200 #	AIRM	ATE SUPER ISHP11/200ES #
ITEM NO.	04459		(ELECTRIC START) 04465	04461		(ELECTRIC START) 04463
Engine	HONDA GX340		HONDA GX340	HONDA GX340		HONDA GX340
Air Receiver Size	150 litres		150 litres	200 litres		200 litres
Piston Displacement	35 CFM (991 litres/min)		35 CFM (991 litres/min)	35 CFM (991 litres/min)		35 CFM (991 litres/min)
Free Air Delivery (F.A.D.)	26 CFM (736 litres/min)	ELECTRIC	26 CFM (736 litres/min)	26 CFM (736 litres/min)	ELECTRIC	26 CFM (736 litres/min)
Max. Pressure	150psi (10 bar)	STARTING	150psi (10 bar)	150psi (10 bar)	STARTING	150psi (10 bar)
Speed	1275rpm		1275rpm	1275rpm		1275rpm
No. of Cylinders	2		2	2		2
No. of Stages	2		2	2		2
Weight	146kg		147kg	182kg		183kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm		1050 x 480 x 1140mm	1140 x 520 x 1600mm		1140 x 520 x 1600mm
Barcode Number	5012713044597		5012713044658	5012713044610		5012713044634
				†† These units are for fixed instal	lation and are no	t recommended for outdoor use

BELT DRIVE Industrial - petrol driven - KOHLER

Key features
Reliable petrol powered compressors - ideal for industrial use. Built in the UK by SIP, these compressors are powered by quality Kohler industrial

Offering either mobile or a static permanent installation option in busy and demanding environments.

- · Electric start option available*
- Quad Clean $^{\prime\prime\prime}$ heavy duty cyclonic air cleaner cyclonic action forces large particles of contaminants out of the engine
- · Engine designed in the USA
- Air receiver exceeds CE regulations
- 3 year parts, 10 year air receiver anti-corrosion warranty

© Copyright Kohler Co.

* Battery and leads not included



Quad Clean™ Cyclonic air cleaner

04328 Airmate Industrial Super ISKP7/50 04330 Airmate Industrial Super ISHP7/150 04331 Airmate Industrial Super ISHP7/150ES Electric Start*



- Powerful Kohler® 7hp petrol engine
- 16 CFM (453 litres/min) piston displacement
- Item No: 04328 is supplied with a wheel kit, featuring pneumatic tyres for smoother manoeuvrability
- Items: 04330 and 04331 are supplied as static compressors, for permanent installation, a wheel kit is available as an option.

REQUIRED: Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359











Relentless Power. Legendary Performance.












MODEL	AIRMATE SUPER ISKP7/50 †	AIRMATE SUPER ISKP7/150 ^{††}	AIRMATE SUPER ISKP7/150ES ¹¹			
ITEM NO.	04328	04330	(ELECTRIC START) 04331			
Engine	KOHLER 7hp	KOHLER 7hp	KOHLER 7hp			
Air Receiver Size	50 litres	150 litres	150 litres			
Piston Displacement	16 CFM (453 litres/min)	16 CFM (453 litres/min)	16 CFM (453 litres/min)			
Free Air Delivery (F.A.D.)	11 CFM (324 litres/min)	11 CFM (324 litres/min)	ELECTRIC 11 CFM (324 litres/min)			
Max. Pressure	150psi (10 bar)	150psi (10 bar)	STARTING 150psi (10 bar)			
Speed	1200rpm	1200rpm	1200rpm			
No. of Cylinders	2	2	2			
No. of Stages	1	1	1			
Weight	85kg	114kg	115kg			
Packaged Dimensions (HxWxL)	950 x 500 x 1000mm	1020 x 440 x 1450mm	1020 x 440 x 1450mm			
Barcode Number	5012713043286	5012713043309	5012713043316			
	† Recommended for export customers: †† These units are for fixed installation and are not recommended for cuttings use					

- 04332 Airmate Industrial Super ISKP9.5/150
- 04333 Airmate Industrial Super ISKP9.5/150ES Electric Start*
- 04334 Airmate Industrial Super ISKP9.5/200
- 04335 Airmate Industrial Super ISKP9.5/200ES Electric Start*
- Powerful Kohler® 9.5hp petrol engine
- 23 CFM (678 litres/min) piston displacement

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359

* Battery and leads not included

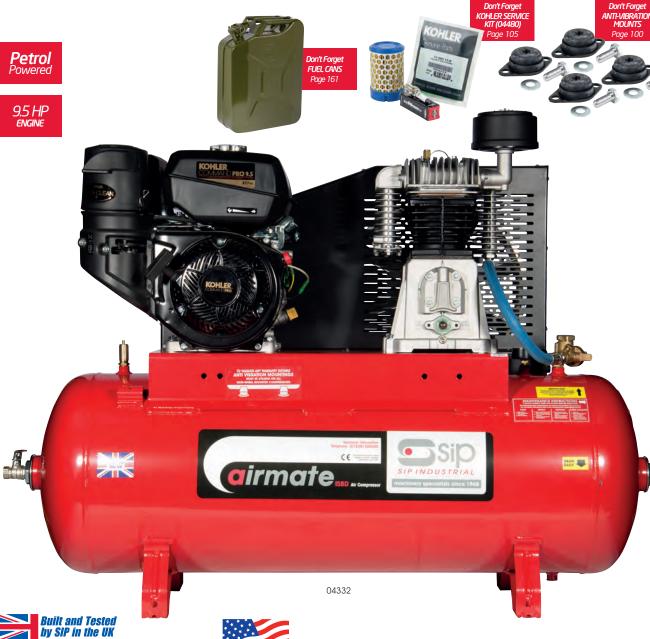



Relentless Power. Legendary Performance.











MODEL	AIRMATE SUPER ISKP9.5/150 ⁺⁺	AIRMATE	SUPER ISKP9.5/150ES ^{††}	AIRMATE SUPER ISKP9.5/200 ^{††}	AIRMA	TE SUPER ISKP9.5/200ES **
ITEM NO.	04332		ELECTRIC START) 04333	04334		(ELECTRIC START) 04335
Engine	KOHLER 9.5hp		KOHLER 9.5hp	KOHLER 9.5hp		KOHLER 9.5hp
Air Receiver Size	150 litres		150 litres	200 litres		200 litres
Piston Displacement	23 CFM (678 litres/min)		23 CFM (678 litres/min)	23 CFM (678 litres/min)		23 CFM (678 litres/min)
Free Air Delivery (F.A.D.)	17 CFM (501 litres/min)	ELECTRIC	17 CFM (501 litres/min)	17 CFM (501 litres/min)	ELECTRIC	17 CFM (501 litres/min)
Max. Pressure	150psi (10 bar)	STARTING	150psi (10 bar)	150psi (10 bar)	STARTING	150psi (10 bar)
Speed	1400rpm		1400rpm	1400rpm		1400rpm
No. of Cylinders	2		2	2		2
No. of Stages	2		2	2		2
Weight	143kg		145kg	178kg		180kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm		1050 x 480 x 1140mm	1040 x 520 x 1600mm		1040 x 520 x 1600mm
Barcode Number	5012713043323		5012713043330	5012713043347		5012713043354
	11 These units are far fived installation and are not recommended for suddent use					

BELT DRIVE Industrial - petrol driven - KOHLER

04336 Airmate Industrial Super ISKP14/150



04338 Airmate Industrial Super ISKP14/200ES Electric Start*



• 35 CFM (1032 litres/min) piston displacement

Stationary compressors must be fitted with anti-vibration mountings, suggested mounts - SIP item no. 02359







Relentless Power. Legendary Performance.













industrial level ★★★★



MODEL	AIRMATE SUPER ISKP14/150 #	AIRMATE SUPER ISKP14/200 #	AIRMATE SUPER ISKP14/200ES ^{††}			
ITEM NO.	04336	04337	(ELECTRIC START) 04338			
Engine	KOHLER 14hp	KOHLER 14hp	KOHLER 14hp			
Air Receiver Size	150 litres	200 litres	200 litres			
Piston Displacement	35 CFM (1032 litres/min)	35 CFM (1032 litres/min)	35 CFM (1032 litres/min)			
Free Air Delivery (F.A.D.)	26 CFM (736 litres/min)	26 CFM (736 litres/min)	ELECTRIC 26 CFM (736 litres/min)			
Max. Pressure	150psi (10 bar)	150psi (10 bar)	STARTING 150psi (10 bar)			
Speed	1275rpm	1275rpm	1275rpm			
No. of Cylinders	2	2	2			
No. of Stages	2	2	2			
Weight	150kg	190kg	192kg			
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm	1140 x 520 x 1600mm	1140 x 520 x 1600mm			
Barcode Number	5012713043361	5012713043378	5012713043385			
^{††} These units are for fixed installation and are not recommended for outdoor use						

BELT DRIVE Industrial - diesel driven - LOMBARDINI

Key features

Reliable diesel powered compressors - ideal for industrial use. Built in the UK by SIP these compressors are powered by high quality Lombardini industrial diesel engines. Economy and power. A static compressor for permanent installation in busy environments.

- Electric start included*
- Heavy duty efficiency pump for more usable air
- Multi-bladed flywheel dynamically balanced for better cooling
- Large finned cylinder head for optimal heat dissipation
- Air receiver exceeds CE regulations
- 3 year parts, 10 year air receiver anti-corrosion warranty



04330 Airmate Industrial Super ISLD8/150 Diesel* 04331 Airmate Industrial Super ISLD8/200 Diesel*

industrial level ★★★★



- Powerful Lombardini 8hp engine
- 23 CFM (678 litres/min) piston displacement



FOR EXPORT ONLY



by SIP in the UK



TOREST ON SILE	EUDRICATED BARREL RECEIVER	WARRANTY WARRANTY
MODEL	AIRMATE SUPER ISLD8/150	AIRMATE SUPER ISLD8/200
ITEM NO.	04330	04331
Engine	8hp LOMBARDINI	8hp LOMBARDINI
Air Receiver Size	150 litres	200 litres
Piston Displacement	23 CFM (678 litres/min)	23 CFM (678 litres/min)
Free Air Delivery (F.A.D.)	17 CFM (501 litres/min)	17 CFM (501 litres/min)
Max. Pressure	150psi (10 bar)	150psi (10 bar)
Speed	ELECTRIC 1400rpm	ELECTRIC 1400rpm
No. of Cylinders	2	2
No. of Stages	2	2
Weight	155kg	195kg
Packaged Dimensions (HxWxL)	1050 x 480 x 1140mm	1140 x 520 x 1600mm
Barcode Number	5012713020270	5012713020294
	***************************************	***************************************

CAST IRON 150 LITRE 200 LITRE 3 YEAR AIR RECEIP

SCREW COMPRESSORS - Airmate Mercury


key features
Industrial SCREW Compressors with Integrated Dryers now available!

These 3 phase rotary screw compressors are designed for continuous use in demanding workshop and industrial environments. Optimising energy consumption, these brand new, Italian made models from SIP are super-efficient, powerful and reliable.

Why Choose an SIP Screw Compressor?

Over 95% of the air intake is delivered to the tank, meaning greater efficiency and lower energy consumption than piston compressors

- 100% Duty Cycle Intensive and Continuous Running These models can be run for 24 hour usage without a drop in performance
- Quieter than piston compressors allowing installation closer to your workspace
- Air dryer eliminates moisture from the air supply extending the life of air tools
- Save space with this all-in-one package for ultimate air efficiency



Rotary Screw Technology - efficient, low noise and reliable

05219 Mercury SE508-200 Screw Compressor

05211 Mercury Tronic 508-200ES Screw Compressor + Dryer

05237 Mercury 510-200 Screw Compressor

06237 Mercury 708-270 Screw Compressor

06239 Mercury Tronic 708-270ES Screw Compressor + Dryer


06231 Mercury 710-270TA Screw Compressor

- 400v (20amp) supply 3 phase
- 200 litre and 270 litre air receiver options see below
- 8 bar and 10 bar options available see below for details

industrial level ★★★★

100% DUTY CYCLE



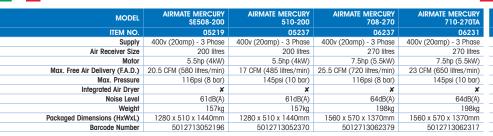

MERCURY TRONIC 508-200ES	MERCURY TRONIC 708-270ES
05211	06239
400v (20amp) - 3 Phase	400v (20amp) - 3 Phase
200 litres	270 litres
5.5hp (4kW)	7.5hp (5.5kW)
20.5 CFM (580 litres/min)	25.5 CFM (720 litres/min)
116psi (8 bar)	116psi (8 bar)
✓ 230v - 13amp supply	✓ 230v - 13amp supply
61dB(A)	64dB(A)
182kg	229kg
1440 x 510 x 1280mm	1560 x 570 x 1370mm
5012713052110	5012713062393

SCREW COMPRESSORS - Airmate Saturn

05223 Saturn 1008-500F Screw Compressor

05231 Saturn 1010-500F Screw Compressor

05225 Saturn 1508-500F Screw Compressor

05233 Saturn 1501-500F Screw Compressor

05227 Saturn 2008-500F Screw Compressor

05235 Saturn 2010-500F Screw Compressor

- 400v supply 3 phase
- 500 litre air receiver
- 8 bar and 10 bar options available (see below for details)







industrial level ★★★★

Saturn - inside (rear)



Made in Italy					400v SUPPLY 3 PHASE	HEAVY DUTY ROTARY SCREW TECHNOLOGY
MODEL	AIRMATE SATURN 1008-500F	AIRMATE SATURN 1010-500F	AIRMATE SATURN 1508-500F	AIRMATE SATURN 1510-500F	AIRMATE SATURN 2008-500F	AIRMATE SATURN 2010-500F
ITEM NO.	05223	05231	05225	05233	05227	05235
Supply	400v (20amp) - 3 Phase	400v (30amp) - 3 Phase	400v (30amp) - 3 Phase			
Air Receiver Size	500 litres					
Motor	10hp (7.5kW)	10hp (7.5kW)	15hp (11kW)	15hp (11kW)	20hp (15kW)	20hp (15kW)
Max. Free Air Delivery (F.A.D.)	44 CFM (1250 litres/min)	35 CFM (1000 litres/min)	58 CFM (1650 litres/min)	51 CFM (1450 litres/min)	76 CFM (2150 litres/min)	64 CFM (1800 litres/min)
Max. Pressure	116psi (8 bar)	145psi (10 bar)	116psi (8 bar)	145psi (10 bar)	116psi (8 bar)	145psi (10 bar)
Integrated Air Dryer	×	×	×	×	×	×
Noise Level	68dB(A)	68dB(A)	69dB(A)	69dB(A)	70dB(A)	70dB(A)
Weight	330kg	330kg	344kg	344kg	361kg	361kg
Packaged Dimensions (HxWxL)	1700 x 700 x 2000mm					
Barcode Number	5012713052233	5012713052318	5012713052257	5012713052332	5012713052271	5012713052356

05235

Load Hours

SCREW COMPRESSORS - Airmate Saturn

05215 **Saturn 1008-500ES** Screw Compressor + Dryer





05217 **Saturn 1508-500ES** Screw Compressor + Dryer 05275 **Saturn 2008-500ES** Screw Compressor + Dryer

Powerful, reliable and effective screw compressors complete with integrated air dryer. The air dryer eliminates moisture from the air supply extending the life of air tools.

- 400v supply 3 phase
- 500 litre air receiver
- 8 bar working pressure

SAVE SPACE WITH THIS ALL-IN-ONE PACKAGE FOR ULTIMATE AIR EFFICIENCY



MODEL	AIRMATE SATURN 1008-500ES	AIRMATE SATURN 1508-500ES	AIRMATE SATURN 2008-500ES
ITEM NO.	05215	05217	05275
Supply	400v (20amp) - 3 Phase	400v (20amp) - 3 Phase	400v (30amp) - 3 Phase
Air Receiver Size	500 litres	500 litres	500 litres
Motor	10hp (7.5kW)	15hp (11kW)	20hp (15kW)
Max. Free Air Delivery (F.A.D.)	44 CFM (1250 litres/min)	58 CFM (1650 litres/min)	76 CFM (2150 litres/min)
Max. Pressure	116psi (8 bar)	116psi (8 bar)	116psi (8 bar)
Integrated Air Dryer	✓ 230v - 13amp supply	✓ 230v - 13amp supply	✓ 230v - 13amp supply
Noise Level	68dB(A)	69dB(A)	70dB(A)
Weight	375kg	395kg	411kg
Packaged Dimensions (HxWxL)	1980 x 650 x 1630mm	1980 x 650 x 1630mm	1980 x 650 x 1630mm
Barcode Number	5012713052158	5012713052172	5012713052752

SILENCED INDUSTRIAL Compressors

key features

Presenting our range of fantastic silenced piston compressors, designed to give you powerful performance but with the fraction of the noise associated with standard piston compressors. These Italian made compressors are an excellent addition to any workshop where the installation requires close placement to the workspace.

- For large air volume requirements with the lowest possible noise levels.
- Extra quiet only 64dB(A)
- Heavy duty 2 stage piston pump for optimum performance and reliability



extra quiet operation

06223 Airmate NB7/270 Silenced Compressor 06224 Airmate NB10/500 Silenced Compressor

- 400v (20amp) supply 3 phase
- 270 & 500 litre air receiver options (see below)
- 145psi (10 bar) maximum pressure
- 2 stage piston pump





industrial level ★★★★



MODEL	AIRMATE NB7/270 SILENCED	AIRMATE NB10/500 SILENCED
ITEM NO.	06223	06224
Supply	400v (20amp) - 3 Phase	400v (20amp) - 3 Phase
Air Receiver Size	270 litres	500 litres
Motor	7.5hp (5.6kW)	10hp (7.5kW)
Max. Free Air Delivery (F.A.D.)	31 CFM (850 litres/min)	44 CFM (1246 litres/min)
Max. Pressure	145psi (10 bar)	145psi (10 bar)
Noise Level	64dB(A)	64dB(A)
Weight	249kg	375kg
Packaged Dimensions (HxWxL)	1330 x 720 x 1450mm	1520 x 850 x 1930mm
Barcode Number	5012713062232	5012713062249

COMPRESSED AIR DRYERS

Key features
The SIP range of compressed air dryers are ideal for eliminating moisture from the air supply and can extend the life of air tools. All models are equipped with a high efficiency heat exchanger including an integrated condensate separator. Plus a programmable control board adjusts the fan speed according to the load.

- Dry air perfect for spray painting
- · Can prolong the life of air tools

05303 **PS9** Compressed Air Dryer

05306 **P\$11** Compressed Air Dryer

05307 **PS17** Compressed Air Dryer

05309 **P\$24** Compressed Air Dryer

- 230v (13amp) supply
- 16 bar (232 psi) maximum pressure
- · Compatible with all SIP pneumatic compressors*

* may also be compatible with non-SIP units -



1100 ltr/min FLOW RATE

1200 ltr/min FLOWRATE



trade level **



easy-to-read touch control panel







MODEL	PS9	PS11	PS12	PS24
ITEM NO.	05303	05306	05307	05309
Supply	230v (13amp)	230v (13amp)	230v (13amp)	230v (13amp)
FLOW RATE				
Litres/min	900	1100	1200	2400
m³/hr	54	66	72	144
CFM	32	39	42	85
Max. Pressure	16 bar (232psi)	16 bar (232psi)	16 bar (232psi)	16 bar (232psi)
Connection Size	1/2"	1/2"	1"	1"
Net Weight	24kg	25kg	27kg	29kg
Packaged Dimensions (HxWxL)	460 x 560 x 220mm			
Barcode Number	5012713053032	5012713053063	5012713053070	5012713053094