


Bright key steel length 1 meter

DIN 6880

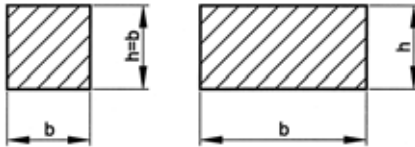

- Bright key steel is cold drawn with a rather smooth and bright surface and corresponding to a high accuracy of dimensions. Usable for the manufacturing of parallel keys and taper keys with gip head.
- For b is the tolerance h9 and for h tolerance h11 (except the size 12 x 8 and square key steel having for b as well as h tolerance h9).

Article groups

Material	Packaging	Code	Page
St C45K	Standard	39270	9-44
St.St. A4	Standard	55512	9-44

39270 Bright key steel length 1 meter

L11B

Material Steel C45K
Packaging Standard



b x h	☒	Art.number	b x h	☒	Art.number	b x h	☒	Art.number
3X3MM	2	39270.033.001	12X8MM	2	39270.128.001	20X20MM	1	39270.220.001
4X4MM	2	39270.044.001	12X12MM	2	39270.132.001	22X14MM	1	39270.234.001
5X5MM	2	39270.055.001	14X9MM	1	39270.149.001	22X22MM	1	39270.242.001
6X6MM	2	39270.066.001	14X14MM	1	39270.154.001	25X14MM	1	39270.264.001
7X7MM	2	39270.077.001	16X10MM	1	39270.170.001	28X16MM	1	39270.296.001
8X7MM	2	39270.087.001	16X16MM	1	39270.176.001	32X18MM	1	39270.338.001
8X8MM	2	39270.088.001	18X11MM	1	39270.191.001	36X20MM	1	39270.380.001
10X8MM	2	39270.108.001	18X18MM	1	39270.198.001	40X22MM	1	39270.422.001
10X10MM	2	39270.110.001	20X12MM	1	39270.212.001	45X25MM	1	39270.475.001

55512 Bright key steel length 1 meter

R49A

Material Stainless steel A4
Packaging Standard
 DIN ≈6880



b x h	☒	Art.number	b x h	☒	Art.number	b x h	☒	Art.number
4X4MM	2	55512.044.001	12X8MM	2	55512.128.001	22X14MM	1	55512.234.001
5X5MM	2	55512.055.001	14X9MM	1	55512.149.001	25X14MM	1	55512.264.001
6X6MM	2	55512.066.001	16X10MM	1	55512.170.001	28X16MM	1	55512.296.001
8X7MM	2	55512.087.001	18X11MM	1	55512.191.001			
10X8MM	2	55512.108.001	20X12MM	1	55512.212.001			